



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification:</b> C11D 1/22, C11D 1/62, C11D 1/65, C11D 1/72, C11D 1/722, C11D 1/75, C11D 1/83, C11D 11/04, C11D 17/00	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/23549</b> <b>(43) International Publication Date:</b> 27 April 2000 (27.04.2000)
<b>(21) International Application Number:</b> PCT/US99/24032 <b>(22) International Filing Date:</b> 13 October 1999 (13.10.1999) <b>(30) Priority Data:</b> 60/105,017 20 October 1998 (20.10.1998) US <b>(60) Parent Application or Grant</b> THE PROCTER & GAMBLE COMPANY [/]; (). KOTT, Kevin, Lee [/]; (). SCHEIBEL, Jeffrey, John [/]; (). SEVERSON, Roland, George [/]; (). CRIPE, Thomas, Anthony [/]; (). BURCKETT-ST. LAURENT, James, Charles, Theophile, Roger [/]; (). KOTT, Kevin, Lee [/]; (). SCHEIBEL, Jeffrey, John [/]; (). SEVERSON, Roland, George [/]; (). CRIPE, Thomas, Anthony [/]; (). BURCKETT-ST. LAURENT, James, Charles, Theophile, Roger [/]; (). REED, T., David ; ().		<b>Published</b>
<b>(54) Title: LAUNDRY DETERGENTS COMPRISING MODIFIED ALKYL BENZENE SULFONATES</b> <b>(54) Titre: DETERGENTS A LESSIVE COMPRENANT DES ALCOYLBENZÈNESULFONATES MODIFIÉS</b>  <b>(57) Abstract</b> Modified alkylbenzene sulfonate surfactant mixtures comprise a mixture of specific branched and non-branched alkylbenzene sulfonate compounds, and are further characterised by 2/3-phenyl index of 257-10000. Detergent and cleaning products containing these mixtures are also claimed.  <b>(57) Abrégé</b> L'invention concerne des mélanges tensioactifs à base d'alcoylbenzènesulfonates modifiés, comprenant un mélange de composés alcoylbenzènesulfonates ramifiés et non ramifiés spécifiques, et se caractérisant par un indice 2/3-phényle de 257-10 000. Des produits détergents et nettoyants contenant ces mélanges sont également décrits.		

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>C11D 1/22, 1/65, 1/83, 11/04, 17/00 //</b> <b>1/75, 1/62, 1/72, 1/72</b>		<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/23549</b> <b>(43) International Publication Date:</b> <b>27 April 2000 (27.04.00)</b>
<b>(21) International Application Number:</b> PCT/US99/24032 <b>(22) International Filing Date:</b> 13 October 1999 (13.10.99) <b>(30) Priority Data:</b> 60/105,017 20 October 1998 (20.10.98) US <b>(71) Applicant (for all designated States except US):</b> THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> KOTT, Kevin, Lee [US/US]; 2920 Bentbrook Drive, Cincinnati, OH 45251 (US). SCHEIBEL, Jeffrey, John [US/US]; 6651 Miami Trails Drive, Loveland, OH 45140 (US). SEVERSON, Roland, George [US/US]; 10184 Amberwood Court, Cincinnati, OH 45241 (US). CRIPE, Thomas, Anthony [US/US]; 599 Three Chimneys Lane, Loveland, OH 45140 (US). BURCKETT-ST. LAURENT, James, Charles, Theophile, Roger [GB/US]; 11477 Gideon Lane, Cincinnati, OH 45249 (US). <b>(74) Agents:</b> REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217-1087 (US).		<b>(81) Designated States:</b> AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>	
<b>(54) Title:</b> LAUNDRY DETERGENTS COMPRISING MODIFIED ALKYL BENZENE SULFONATES			
<b>(57) Abstract</b>  Modified alkylbenzene sulfonate surfactant mixtures comprise a mixture of specific branched and non-branched alkylbenzene sulfonate compounds, and are further characterised by 2/3-phenyl index of 257-10000. Detergent and cleaning products containing these mixtures are also claimed.			

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NR	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**Description**

5

10

15

20

25

30

35

40

45

50

55

LAUNDRY DETERGENTS COMPRISING MODIFIED ALKYL BENZENE  
SULFONATES

FIELD OF THE INVENTION

The present invention relates to particular types of alkylbenzene sulfonate surfactant mixtures containing branching and adapted for laundry and cleaning product use by controlling compositional parameters, especially a 2/3-phenyl index and a 2-methyl-2-phenyl index, as well as to improved detergent and cleaning products containing these surfactant mixtures, to alkylbenzene precursors for the surfactant mixtures, and to methods of making the precursors as well as the surfactant mixtures. The present compositions are especially useful for fabric laundering.

BACKGROUND OF THE INVENTION

Historically, highly branched alkylbenzene sulfonate surfactants, such as those based on tetrapropylene, known as "ABS" or "TPBS", were used in detergents. However, these were found to be very poorly biodegradable. A long period followed of improving manufacturing processes for alkylbenzene sulfonates, making them as linear as practically possible, hence the acronym "LAS". The overwhelming part of a large art of linear alkylbenzene sulfonate surfactant manufacture is directed to this objective. All relevant large-scale commercial alkylbenzene sulfonate processes in use today are directed to linear alkylbenzene sulfonates. However, linear alkylbenzene sulfonates are not without limitations; for example, they would be more desirable if improved for hard water cleaning and/or cold water cleaning properties. They can often fail to produce good cleaning results, for example when formulated with nonphosphate builders and/or when used in hard water areas.

5

10

As a result of the limitations of the alkylbenzene sulfonates, consumer cleaning formulations have often needed to include a higher level of cosurfactants, builders, and other additives than would have been needed given a superior alkylbenzene sulfonate.

15

20

The art of alkylbenzene sulfonate detergents is replete with references which teach both for and against almost every aspect of these compositions. Moreover, there are believed to be erroneous teachings and technical misconceptions about the mechanism of LAS operation under in-use conditions, particularly in the area of hardness tolerance. The volume of such references debases the art as a whole and makes it difficult to select the useful teachings from the useless without repeated experimentation. To further understand the state of the art, it should be appreciated that there has been not only a lack of clarity on which way to go to fix the unresolved problems of linear LAS, but also a range of misconceptions, not only in the understanding of biodegradation but also in basic mechanisms of operation of LAS in presence of hardness.

25

30

35

Also, while the currently commercial, essentially linear alkylbenzene sulfonate surfactants are relatively simple compositions to define and analyze, compositions containing both branched and linear alkylbenzene sulfonate surfactants are complex. In general such compositions can be highly varied, containing one or more different kinds of branching in any of a number of positions on the aliphatic chain. A very large number, e.g., hundreds, of distinct chemical species are possible in such mixtures. Accordingly there is an onerous burden of experimentation if it is desired to improve such compositions so that they can clean fabrics better in detergent compositions while at the same time remaining biodegradable. The formulator's knowledge is key to guiding this effort.

40

45

Yet another currently unresolved problem in alkylbenzene sulfonate manufacture is to make more effective use of current LAB feedstocks. It would be highly desirable, both from a performance point of view and from an economic point of view, to better utilize certain desirable types of branched hydrocarbons.

50

Accordingly there is a substantial unmet need for further improvements in alkylbenzene sulfonate surfactant mixtures, especially with respect to those offering one or more of the advantages of superior cleaning, hardness tolerance, satisfactory biodegradability, and cost.

55

5

BACKGROUND ART

10

15

20

25

30

35

40

US 5,659,099, US 5,393,718, US 5,256,392, US 5,227,558, US 5,139,759, US 5,164,169, US 5,116,794, US 4,840,929, US 5,744,673, US 5,522,984, US 5,811,623, US 5,777,187, WO 9,729,064, WO 9,747,573, WO 9,729,063, US 5,026,933; US 4,990,718; US 4,301,316; US 4,301,317; US 4,855,527; US 4,870,038; US 2,477,382; EP 466,558, 1/15/92; EP 469,940, 2/5/92; FR 2,697,246, 4/29/94; SU 793,972, 1/7/81; US 2,564,072; US 3,196,174; US 3,238,249; US 3,355,484; US 3,442,964; US 3,492,364; US 4,959,491; WO 88/07030, 9/25/90; US 4,962,256, US 5,196,624; US 5,196,625; EP 364,012 B, 2/15/90; US 3,312,745; US 3,341,614; US 3,442,965; US 3,674,885; US 4,447,664; US 4,533,651; US 4,587,374; US 4,996,386; US 5,210,060; US 5,510,306; WO 95/17961, 7/6/95; WO 95/18084; US 5,510,306; US 5,087,788; US 4,301,316; US 4,301,317; US 4,855,527; US 4,870,038; US 5,026,933; US 5,625,105 and US 4,973,788. The manufacture of alkylbenzene sulfonate surfactants has recently been reviewed. See Vol 56 in "Surfactant Science" series, Marcel Dekker, New York, 1996, including in particular Chapter 2 entitled "Alkylarylsulfonates: History, Manufacture, Analysis and Environmental Properties", pages 39-108 which includes 297 literature references. Surfactant-related analytical methods are described in "Surfactant Science" series, Vol 73, Marcel Dekker, New York, 1998 and "Surfactant Science" series, Vol 40, Marcel Dekker, New York, 1992. Documents referenced herein are incorporated in their entirety. See also copending U.S. Patent applications No. 60/053,319 Attorney docket No 6766P filed on July 21st, 1997, No. 60/053,318, Attorney docket No 6767P filed on July 21st, 1997, No. 60/053,321, Attorney docket No 6768P filed on July 21st, 1997, No. 60/053,209, Attorney docket No 6769P filed on July 21st, 1997, No. 60/053,328, Attorney docket No 6770P filed on July 21st, 1997, No. 60/053,186, Attorney docket No 6771P filed on July 21st, 1997 and the art cited therein.

SUMMARY OF THE INVENTION

45


50

It has now surprisingly been found that there exist certain alkylbenzene sulfonate surfactant mixtures, hereinafter "modified alkylbenzene sulfonate surfactant mixtures" which offer one or more, and even several of the above-outlined advantages. The discovery of these mixtures solves important problems of the kind described in the background.

55

Thus in accordance with a first embodiment of the present invention, a novel modified alkylbenzene sulfonate surfactant mixture is provided. This novel surfactant mixture comprises, preferably consists essentially of:

(a) from about 60% to about 95% by weight, preferably from about 65% to about 90%, more preferably from about 70% to about 85%, of a mixture of branched alkylbenzene sulfonates having formula (I):




(I)

wherein L is an acyclic aliphatic moiety consisting of carbon and hydrogen, said L having two methyl termini and said L having no substituents other than A, R<sup>1</sup> and R<sup>2</sup>; and wherein said mixture of branched alkylbenzene sulfonates contains two or more, preferably at least three, optionally more, of said branched alkylbenzene sulfonates differing in molecular weight of the anion of said formula (I) and wherein said mixture of branched alkylbenzene sulfonates has

- a sum of carbon atoms in R<sup>1</sup>, L and R<sup>2</sup> of from 9 to 15, preferably from 10 to 14;
- an average aliphatic carbon content, i.e., based on R<sup>1</sup>, L and R<sup>2</sup> and excluding A, of from about 10.0 to about 14.0 carbon atoms, preferably from about 11.0 to about 13.0, more preferably from about 11.5 to about 12.5; M is a cation or cation mixture, preferably M is selected from H, Na, K, Ca, Mg and mixtures thereof, more preferably M is selected from H, Na, K and mixtures thereof, more preferably still, M is selected from H, Na, and mixtures thereof, M having a valence q, typically from 1 to 2, preferably 1; a and b are integers selected such that said branched alkylbenzene sulfonates are electroneutral (a is typically from 1 to 2, preferably 1, b is 1); R<sup>1</sup> is C<sub>1</sub>-C<sub>3</sub> alkyl, preferably C<sub>1</sub>-C<sub>2</sub> alkyl, more preferably methyl; R<sup>2</sup> is selected from H and C<sub>1</sub>-C<sub>3</sub> alkyl (preferably H and C<sub>1</sub>-C<sub>2</sub> alkyl, more preferably H and methyl, more preferably H and methyl provided that in at least about 0.5, more preferably 0.7, more preferably 0.9 to 1.0 mole fraction of said branched alkylbenzene sulfonates, R<sup>2</sup> is H); A is a benzene moiety (typically A is the moiety -C<sub>6</sub>H<sub>4</sub>-



, with the SO<sub>3</sub> moiety of Formula (I) in *para*- position to the L moiety, though in some proportion, usually no more than about 5%, preferably from 0 to 5% by weight, the SO<sub>3</sub> moiety is *ortho*- to L); and (b) from about 5% to about 40% by weight, preferably from about 10% to about 35%, more preferably from about 15% to about 30%, of a mixture of nonbranched alkylbenzene sulfonates having formula (II):



wherein a, b, M, A and q are as defined hereinbefore and Y is an unsubstituted linear aliphatic moiety consisting of carbon and hydrogen having two methyl termini, and wherein said Y has a sum of carbon atoms of from 9 to 15, preferably from 10 to 14, and said Y has an average aliphatic carbon content of from about 10.0 to about 14.0, preferably from about 11.0 to about 13.0, more preferably 11.5 to 12.5 carbon atoms; and wherein said modified alkylbenzene sulfonate surfactant mixture is further characterized by a 2/3-phenyl index of from about 275 to about 10,000, preferably from about 350 to about 1200, more preferably from about 500 to about 700; and also preferably wherein said modified alkylbenzene sulfonate surfactant mixture has a 2-methyl-2-phenyl index of less than about 0.3, preferably less than about 0.2, more preferably less than about 0.1, more preferably still, from 0 to 0.05.

The first embodiment of the present invention also encompasses the novel modified alkylbenzene sulfonate surfactant mixtures as defined on the basis of their preparation. Such novel surfactant mixtures include those comprising, preferably consisting essentially of: the product of a process comprising the steps of: (I) alkylating benzene with an alkylating mixture; (II) sulfonating the product of (I); and (optionally but very preferably) (III) neutralizing the product of (II); wherein said alkylating mixture comprises: (a) from about 1% to about 99.9%, by weight of branched C<sub>9</sub>-C<sub>20</sub> (preferably C<sub>9</sub>-C<sub>15</sub>, more preferably C<sub>10</sub>-C<sub>14</sub>) monoolefins, said branched monoolefins having structures identical with those of the branched monoolefins formed by dehydrogenating branched paraffins of formula R<sup>1</sup>LR<sup>2</sup> wherein L is an acyclic aliphatic moiety consisting

of carbon and hydrogen and containing two terminal methyls;  $R^1$  is  $C_1$  to  $C_3$  alkyl; and  $R^2$  is selected from H and  $C_1$  to  $C_3$  alkyl; and (b) from about 0.1% to about 85%, by weight of  $C_9$ - $C_{20}$  (preferably  $C_9$ - $C_{15}$ , more preferably  $C_{10}$ - $C_{14}$ ) linear aliphatic olefins; wherein said alkylating mixture contains said branched  $C_9$ - $C_{20}$  monoolefins having at least two different carbon numbers in said  $C_9$ - $C_{20}$  range, and has a mean carbon content of from about 9.0 to about 15.0 carbon atoms (preferably from about 10.0 to about 14.0, more preferably from about 11.0 to about 13.0, more preferably still from about 11.5 to about 12.5); and wherein said components (a) and (b) are at a weight ratio of at least about 15:85 (preferably having branched component (a) in excess of linear component (b), for example 51% or more by weight of (a) and 49% or less of (b), more preferably 60% to 95% by weight of (a) and 5% to 40% of (b), more preferably still 65% to 90% by weight of (a) and 10% to 35% of (b), more preferably still 70% to 85% by weight of (a) and 15% to 30% of (b) wherein these percentages by weight exclude any other materials, for example diluent hydrocarbons, that may be present in the process).

In like manner, the invention encompasses a novel alkylbenzene sulfonate surfactant mixture comprising, preferably consisting essentially of: the product of a process comprising the steps, in sequence, of: (I) alkylating benzene with an alkylating mixture; (II) sulfonating the product of (I); and (III) neutralizing the product of (II); wherein said alkylating mixture comprises: (a) from about 1% to about 99.9%, by weight of a branched alkylating agent selected from: (i)  $C_9$ - $C_{20}$  (preferably  $C_9$ - $C_{15}$ , more preferably  $C_{10}$ - $C_{14}$ ) internal monoolefins  $R^1LR^2$  wherein L is an acyclic olefinic moiety consisting of carbon and hydrogen and containing two terminal methyls; (ii)  $C_9$ - $C_{20}$  (preferably  $C_9$ - $C_{15}$ , more preferably  $C_{10}$ - $C_{14}$ ) alpha monoolefins  $R^1AR^2$  wherein A is an acyclic alpha-olefinic moiety consisting of carbon and hydrogen and containing one terminal methyl and one terminal olefinic methylene; (iii)  $C_9$ - $C_{20}$  (preferably  $C_9$ - $C_{15}$ , more preferably  $C_{10}$ - $C_{14}$ ) vinylidene monoolefins  $R^1BR^2$  wherein B is an acyclic vinylidene olefin moiety consisting of carbon and hydrogen and containing two terminal methyls and one internal olefinic methylene; (iv)  $C_9$ - $C_{20}$  (preferably  $C_9$ - $C_{15}$ , more preferably  $C_{10}$ - $C_{14}$ ) primary alcohols  $R^1QR^2$  wherein Q is an acyclic aliphatic primary terminal alcohol moiety consisting of carbon, hydrogen and oxygen and containing one terminal methyl; (v)  $C_9$ - $C_{20}$  (preferably  $C_9$ - $C_{15}$ , more preferably  $C_{10}$ - $C_{14}$ ) primary alcohols  $R^1ZR^2$  wherein Z is an

acyclic aliphatic primary nonterminal alcohol moiety consisting of carbon, hydrogen and oxygen and containing two terminal methyls; and (vi) mixtures thereof; wherein in any of (i)-(vi), said  $R^1$  is  $C_1$  to  $C_3$  alkyl and said  $R^2$  is selected from H and  $C_1$  to  $C_3$  alkyl; and (b) from about 0.1% to about 85%, by weight of  $C_9$ - $C_{20}$  (preferably  $C_9$ - $C_{15}$ , more preferably  $C_{10}$ - $C_{14}$ ) linear alkylating agent selected from  $C_9$ - $C_{20}$  (preferably  $C_9$ - $C_{15}$ , more preferably  $C_{10}$ - $C_{14}$ ) linear aliphatic olefins,  $C_9$ - $C_{20}$  (preferably  $C_9$ - $C_{15}$ , more preferably  $C_{10}$ - $C_{14}$ ) linear aliphatic alcohols and mixtures thereof; wherein said alkylating mixture contains said branched alkylating agents having at least two different carbon numbers in said  $C_9$ - $C_{20}$  (preferably  $C_9$ - $C_{15}$ , more preferably  $C_{10}$ - $C_{14}$ ) range, and has a mean carbon content of from about 9.0 to about 15.0 carbon atoms, preferably from about 10.0 to about 14.0, more preferably from about 11.0 to about 13.0, more preferably still from about 11.5 to about 12.5; and wherein said components (a) and (b) are at a weight ratio of at least about 15:85 (preferably having branched component (a) in excess of linear component (b), for example 51% or more by weight of (a) and 49% or less of (b), more preferably 60% to 95% by weight of (a) and 5% to 40% of (b), more preferably still 65% to 90% by weight of (a) and 10% to 35% of (b), more preferably still 70% to 85% by weight of (a) and 15% to 30% of (b) wherein these percentages by weight exclude any other materials, for example diluent hydrocarbons, that may be present in the process).

In accordance with a second embodiment of the present invention, a variety of detergent compositions, especially laundry detergent compositions, comprising the modified alkylbenzene sulfonate surfactant mixture of the first embodiment are provided. Such detergent compositions generally contain an amount of the modified alkylbenzene sulfonate surfactant useful to help clean fabrics, and amounts of laundry detergent-specific adjuncts which distinguish the preferred compositions herein from compositions used in non-laundry detergent fields. One such detergent composition in accordance with the second embodiment of the present invention is


a novel detergent composition comprising, preferably consisting essentially of: (a) from about 1% to about 50%, preferably from about 2% to about 30%, by weight of modified alkylbenzene sulfonate surfactant mixture of the first embodiment, wherein said modified alkylbenzene sulfonate surfactant mixture has a 2-methyl-2-phenyl index of less than about 0.3, preferably of from 0 to 0.2, more preferably no more than about 0.1, more

preferably still, no more than about 0.05; (b) from about 0.000001% to about 10%, preferably from about 0.01% to about 2%, of a member selected from the group consisting of optical brighteners, dyes, photobleaches, hydrophobic bleach activators and transition metal bleach catalysts, preferably at least two of said member components, more preferably at least two of said member components including an optical brightener as one of the member components; (c) from 0.1% to about 40% by weight, preferably not more than about 30%, of surfactants selected from the group consisting of cationic surfactants, nonionic surfactants, anionic surfactants, and amine oxide surfactants (more preferably at least one cationic surfactant is present at a level of from about 0.2% to about 5% by weight, or at least one nonionic surfactant is present at a level of from about 0.5% to about 25% by weight, or at least one alkyl sulfate surfactant or alkyl(polyalkoxy)sulfate surfactant is present at a level of from about 0.5% to about 25% by weight); and (d) from about 10% to about 99% of conventional cleaning adjuncts (other than any of (a) - (c)); provided that when said detergent composition comprises any alkylbenzene sulfonate surfactant other than said modified alkylbenzene sulfonate surfactant mixture (for example as a result of blending into the detergent composition one or more commercial, especially linear, typically linear C<sub>10</sub>-C<sub>14</sub>, alkylbenzene sulfonate surfactants), said detergent composition is further characterized by an overall 2/3-phenyl index of at least about 200, preferably at least about 250, more preferably at least about 350, more preferably still, at least about 500, wherein said overall 2/3-phenyl index is determined by measuring 2/3-phenyl index, as defined herein, on a blend of said modified alkylbenzene sulfonate surfactant mixture and said any other alkylbenzene sulfonate to be added to said detergent composition, said blend, for purposes of measurement, being prepared from aliquots of said modified alkylbenzene sulfonate surfactant mixture and said other alkylbenzene sulfonate not yet exposed to any other of said components of the detergent composition; and further provided that when said detergent composition comprises any alkylbenzene sulfonate surfactant other than said modified alkylbenzene sulfonate surfactant mixture (for example as a result of blending into the detergent composition one or more commercial, especially linear, typically linear C<sub>10</sub>-C<sub>14</sub>, alkylbenzene sulfonate surfactants), said detergent composition is further characterized by an overall 2-methyl-2-phenyl index of less than about 0.3, preferably from 0 to 0.2, more preferably no more

5 than about 0.1, more preferably still, no more than about 0.05, wherein said overall 2-methyl-2-phenyl index is to be determined by measuring 2-methyl-2-phenyl index, as  
10 defined herein, on a blend of said modified alkylbenzene sulfonate surfactant mixture and any other alkylbenzene sulfonate to be added to said detergent composition, said blend,  
15 for purposes of measurement, being prepared from aliquots of said modified alkylbenzene sulfonate surfactant mixture and said other alkylbenzene sulfonate not yet exposed to any other of said components of the detergent composition. These provisions may appear somewhat unusual, however they are consistent with the spirit and scope of the present invention, which encompasses a number of economical but less preferred approaches in  
20 terms of overall cleaning performance, such as blending of the modified alkylbenzene sulfonate surfactants with conventional linear alkylbenzene sulfonate surfactants either during synthesis or during formulation into the detergent composition. Moreover, as is well known to practitioners of detergent analysis, a number of detergent adjuncts (paramagnetic materials such as certain transition metal bleach catalysts, for example, and  
25 sometimes even water) are capable of interfering with methods for determining the parameters of alkylbenzene sulfonate surfactant mixtures as described hereinafter. Hence wherever possible, analysis should be conducted on dry materials before mixing them into the detergent compositions.

30 The invention, on the other hand, is not intended to encompass any wholly conventional alkylbenzene sulfonate compositions or the derivative detergent compositions, such as those based exclusively on linear alkylbenzene sulfonates made by any process, or exclusively on known unacceptably branched alkylbenzene sulfonates such as ABS or TPBS.

35 In accordance with a third embodiment of present invention, a novel modified alkylbenzene mixture is provided. This novel alkylbenzene mixture is useful for making the modified alkylbenzene sulfonate surfactant mixtures of the first embodiment, and comprises, preferably consists essentially of: (a) from about 60% to about 95% (preferably from about 65% to about 90%, more preferably from about 70% to about 85%  
40 ) by weight of a mixture of branched alkylbenzenes having formula (I):



(I)

wherein L is an acyclic aliphatic moiety consisting of carbon and hydrogen and having two methyl termini, and wherein said mixture of branched alkylbenzenes contains two or more compounds of said formula (I) differing in molecular weight and wherein said mixture of branched alkylbenzenes is characterized by a sum of carbon atoms in R<sup>1</sup>, R<sup>2</sup> and L of from 9 to 15, preferably from 10 to 14; and an average aliphatic carbon content (i.e., excluding A), based on the sum of R<sup>1</sup>, L and R<sup>2</sup>, of from about 10.0 to about 14.0, preferably from about 11.0 to about 13.0, more preferably from about 11.5 to about 12.5 carbon atoms; and further, wherein L has no substituents other than A, R<sup>1</sup> and R<sup>2</sup>; R<sup>1</sup> is C<sub>1</sub>-C<sub>3</sub> alkyl (preferably C<sub>1</sub>-C<sub>2</sub> alkyl, more preferably methyl); R<sup>2</sup> is selected from H and C<sub>1</sub>-C<sub>3</sub> alkyl (preferably H and C<sub>1</sub>-C<sub>2</sub> alkyl, more preferably H and methyl, more preferably H and methyl provided that in at least about 0.5, more preferably 0.7, more preferably 0.9 to 1.0 mole fraction of said branched alkylbenzene sulfonates, R<sup>2</sup> is H); A is a (nonsulfonated) benzene moiety (C<sub>6</sub>H<sub>5</sub>- having no substituents other than L); and (b) from about 5% to about 40% (preferably from about 10% to about 35%, more preferably from about 15% to about 30%) by weight of a mixture of nonbranched alkylbenzenes having formula (II):



(II)

wherein A is a (nonsulfonated) benzene moiety (C<sub>6</sub>H<sub>5</sub>- having no substituents other than L) and Y is an unsubstituted linear aliphatic moiety consisting of carbon and hydrogen having two methyl termini, and wherein Y has from 9 to 15 carbon atoms in total (preferably from 10 to 14) and said mixture of nonbranched alkylbenzenes has an average aliphatic carbon content (i.e., carbon content excluding A) of from about 10.0 to about 14.0 carbon atoms, preferably from about 11.0 to about 13.0 carbon atoms, more preferably from about 11.5 to about 12.5 carbon atoms; and

5 wherein said modified alkylbenzene mixture is further characterized by a 2/3-phenyl  
index of from about 275 to about 10,000, more preferably from about 350 to about 1200,  
10 more preferably still from about 500 to about 700, and a 2-methyl-2-phenyl index of less  
than about 0.3, preferably from 0 to about 0.2, more preferably no more than about 0.1,  
5 more preferably still, 0.05 or less.

15 In accordance with other embodiments of the present invention, there are  
encompassed herein a number of alternate and less preferred embodiments, such as those  
in which there is blending of the novel modified alkylbenzene sulfonate surfactant  
mixture of the invention with one or more other alkylbenzene sulfonate surfactants. In  
20 10 practical terms, such blending is usually encompassed before sulfonation and detergent  
formulation, but the outcome is a surfactant mixture or detergent composition containing  
a blend of the novel modified alkylbenzene sulfonate surfactant with other, known,  
alkylbenzene sulfonates. Such alternate embodiments of the invention nonlimitingly  
25 include those termed herein as "medium 2/3-phenyl surfactant mixtures". Such surfactant  
15 mixtures essentially contain useful amounts of the modified alkylbenzene sulfonate  
surfactant, along with other known alkylbenzene sulfonates subject to specific provisions  
of the 2/3-phenyl index of the overall composition. Such compositions include: a medium  
2/3-phenyl surfactant mixture consisting essentially of: from 1% (preferably at least about  
30 5%, more preferably at least about 10 %) to about 60% (in one mode preferably less than  
about 50%, more preferably less than about 40 %), by weight of a first alkylbenzene  
35 20 sulfonate surfactant, wherein said first alkylbenzene sulfonate surfactant is a modified  
alkylbenzene sulfonate surfactant mixture according to the first embodiment; and b) from  
40 40% (in one mode preferably at least about 50%, more preferably at least about 60 %) to  
about 99% (preferably less than about 95%, more preferably less than about 90%), by  
25 45 weight of a second alkylbenzene sulfonate surfactant, wherein said second alkylbenzene  
sulfonate surfactant is an alkylbenzene sulfonate surfactant mixture other than said  
modified alkylbenzene sulfonate surfactant mixture according to the first embodiment,  
and wherein said second alkylbenzene sulfonate surfactant has a 2/3-phenyl index of from  
50 30 about 75 to about 160 (typically said second alkylbenzene sulfonate surfactant is a  
commercial C<sub>10</sub>-C<sub>14</sub> linear alkylbenzene sulfonate surfactant, e.g., DETAL ® process  
LAS or HF process LAS though in general any commercial linear (LAS) or branched

(ABS, TPBS) type can be used); provided that said medium 2/3-phenyl surfactant mixture has a 2/3-phenyl index of from about 160 to about 275 (preferably from about 170 to about 265, more preferably from about 180 to about 255). (of course it is equally possible within the spirit and scope of the invention to prepare any blend of the modified alkylbenzene sulfonate surfactant mixture of the invention with any known commercial linear or branched alkylbenzene sulfonate surfactant.

Preferred cleaning composition embodiments also contain specific cleaning adjuncts defined hereafter. Moreover, the invention encompasses less preferred but sometimes useful embodiments for their normal purposes, such as the addition of useful hydrotrope precursors and/or hydrotropes, such as C<sub>1</sub>-C<sub>8</sub> alkylbenzenes, more typically toluenes, cumenes, xylenes, naphthalenes, or the sulfonated derivatives of any such materials, minor amounts of any other materials, such as tribranched alkylbenzene sulfonate surfactants, dialkylbenzenes and their derivatives, dialkyl tetralins, wetting agents, processing aids, and the like. It will be understood that, with the exception of hydrotropes, it will not be usual practice in the present invention to include any such materials. Likewise it will be understood that such materials, if and when they interfere with analytical methods, will not be included in samples of compositions used for analytical purposes.

The abovementioned embodiments and other aspects of the present invention are more fully described and exemplified in the detailed description hereinafter.

All percentages, ratios and proportions herein are by weight, unless otherwise specified. All temperatures are in degrees Celsius (°C) unless otherwise specified. All documents cited are in relevant part, incorporated herein by reference.


#### DETAILED DESCRIPTION OF THE INVENTION

##### First Embodiment:

##### A. Modified Alkylbenzene Sulfonate Surfactant Mixtures

The present invention encompasses a modified alkylbenzene sulfonate surfactant mixture comprising (preferably, consisting essentially of): (a) from about 60% to about 95% by weight (preferably from about 65% to about 90%, more preferably from about 70% to about 85%) of a mixture of branched alkylbenzene sulfonates having formula (I):






(I)

wherein L is an acyclic aliphatic moiety consisting of carbon and hydrogen, said L having two methyl termini and said L having no substituents other than A, R<sup>1</sup> and R<sup>2</sup>; and wherein said mixture of branched alkylbenzene sulfonates contains two or more (preferably at least three, optionally more) of said branched alkylbenzene sulfonates differing in molecular weight of the anion of said formula (I) and wherein said mixture of branched alkylbenzene sulfonates has a sum of carbon atoms in R<sup>1</sup>, L and R<sup>2</sup> of from 9 to 15 (preferably from 10 to 14); an average aliphatic carbon content (i.e., based on R<sup>1</sup>, L and R<sup>2</sup> and excluding A) of from about 10.0 to about 14.0 carbon atoms (preferably from about 11.0 to about 13.0, more preferably from about 11.5 to about 12.5); M is a cation or cation mixture (preferably selected from H, Na, K, Ca, Mg and mixtures thereof, more preferably selected from H, Na, K and mixtures thereof, more preferably still, selected from H, Na, and mixtures thereof) having a valence q (typically from 1 to 2, preferably 1); a and b are integers selected such that said branched alkylbenzene sulfonates are electroneutral (a is typically from 1 to 2, preferably 1, b is 1); R<sup>1</sup> is C<sub>1</sub>-C<sub>3</sub> alkyl (preferably C<sub>1</sub>-C<sub>2</sub> alkyl, more preferably methyl); R<sup>2</sup> is selected from H and C<sub>1</sub>-C<sub>3</sub> alkyl (preferably H and C<sub>1</sub>-C<sub>2</sub> alkyl, more preferably H and methyl, more preferably H and methyl provided that in at least about 0.5, more preferably 0.7, more preferably 0.9 to 1.0 mole fraction of said branched alkylbenzene sulfonates, R<sup>2</sup> is H); A is a benzene moiety (typically A is the moiety -C<sub>6</sub>H<sub>4</sub>- , with the SO<sub>3</sub> moiety of Formula (I) in *para*- position to the L moiety, though in some proportion, usually no more than about 5%, preferably from 0 to 5% by weight, the SO<sub>3</sub> moiety is *ortho*- to L); and (b) from about 5% to about 40% by weight (preferably from about 10% to about 35%, more preferably from about 15% to about 30%) of a mixture of nonbranched alkylbenzene sulfonates having formula (II):

5

10



15

20

25

wherein a, b, M, A and q are as defined hereinbefore and Y is an unsubstituted linear aliphatic moiety consisting of carbon and hydrogen having two methyl termini, and wherein said Y has a sum of carbon atoms of from 9 to 15, preferably from 10 to 14, and said Y has an average aliphatic carbon content of from about 10.0 to about 14.0 (preferably from about 11.0 to about 13.0, more preferably 11.5 to 12.5 carbon atoms); and wherein said modified alkylbenzene sulfonate surfactant mixture is further characterized by a 2/3-phenyl index of from about 275 to about 10,000 (preferably from about 350 to about 1200, more preferably from about 500 to about 700).

A preferred modified alkylbenzene sulfonate surfactant mixture has M selected from H, Na, K and mixtures thereof, said a=1, said b=1, said q=1, and said modified alkylbenzene sulfonate surfactant mixture has a 2-methyl-2-phenyl index of less than about 0.3, preferably less than about 0.2, more preferably from 0 to about 0.1.

30

35

Such a modified alkylbenzene sulfonate surfactant mixture according can be made as the product of a process using as catalyst a zeolite selected from mordenite, offretite and H-ZSM-12 in at least partially acidic form, preferably an acidic mordenite (in general certain forms of zeolite beta can be used as an alternative but are not preferred). Embodiments described in terms of their making, as well as suitable catalysts, are all further detailed hereinafter.

40

Another preferred modified alkylbenzene sulfonate surfactant mixture according to the first embodiment of the invention consists essentially of said mixture of branched alkylbenzene sulfonates and nonbranched alkylbenzene sulfonates, wherein said 2-methyl-2-phenyl index of said modified alkylbenzene sulfonate surfactant mixture is less than about 0.1, and wherein in said mixture of branched and nonbranched alkylbenzene sulfonates, said average aliphatic carbon content is from about 11.5 to about 12.5 carbon atoms; said R<sup>1</sup> is methyl; said R<sup>2</sup> is selected from H and methyl provided that in at least about 0.7 mole fraction of said branched alkylbenzene sulfonates R<sup>2</sup> is H; and wherein

45


50

55

said sum of carbon atoms in  $R^1$ , L and  $R^2$  is from 10 to 14; and further wherein in said mixture of nonbranched alkylbenzene sulfonates, said Y has a sum of carbon atoms of from 10 to 14 carbon atoms, said average aliphatic carbon content of said nonbranched alkylbenzene sulfonates is from about 11.5 to about 12.5 carbon atoms, and said M is a monovalent cation or cation mixture selected from H, Na and mixtures thereof.

**Definitions:**

Methyl termini The terms "methyl termini" and/or "terminal methyl" mean the carbon atoms which are the terminal carbon atoms in alkyl moieties, that is L, and/or Y of formula (I) and formula (II) respectively are always bonded to three hydrogen atoms. That is, they will form a  $\text{CH}_3$ - group. To better explain this, the structure below shows the two terminal methyl groups in an alkylbenzene sulfonate.

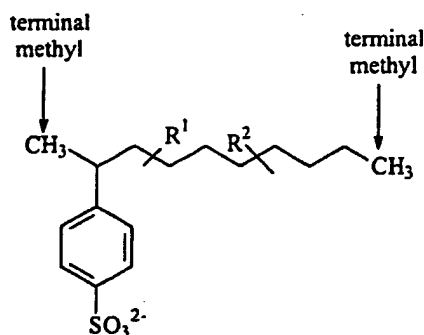


The term "AB" herein when used without further qualification is an abbreviation for "alkylbenzene" of the so-called "hard" or nonbiodegradable type which on sulfonation forms "ABS". The term "LAB" herein is an abbreviation for "linear alkylbenzene" of the current commercial, more biodegradable type, which on sulfonation forms linear alkylbenzene sulfonate, or "LAS". The term "MLAS" herein is an abbreviation for the modified alkylbenzene sulfonate mixtures of the invention.

Impurities: The surfactant mixtures herein are preferably substantially free from impurities selected from tribranched impurities, dialkyl tetralin impurities and mixtures thereof. By "substantially free" it is meant that the amounts of such impurities are insufficient to contribute positively or negatively to the cleaning effectiveness of the composition. Typically there is less than about 5%, preferably less than about 1%, more


preferably about 0.1% or less of the impurity, that is typically no one of the impurities is practically detectable.

### Illustrative Structures


The better to illustrate the possible complexity of modified alkylbenzene sulfonate surfactant mixtures of the invention and the resulting detergent compositions, structures (a) to (v) below are illustrative of some of the many preferred compounds of formula (I). These are only a few of hundreds of possible preferred structures that make up the bulk of the composition, and should not be taken as limiting of the invention.

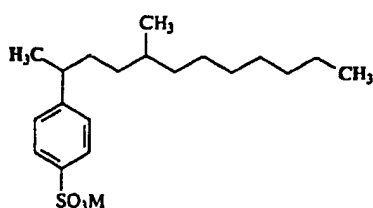


(a)

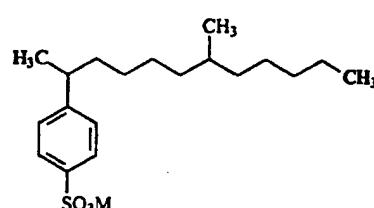


(b)




(c)




(d)

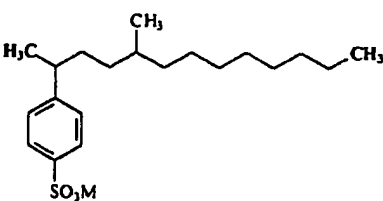


(e)

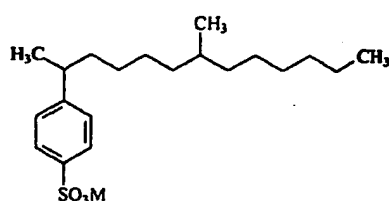


(f)

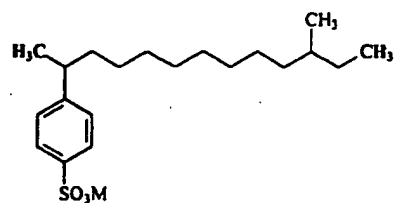


(g)

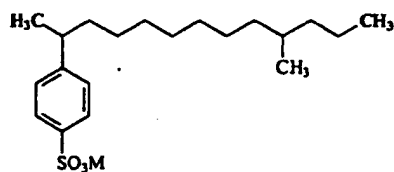


(h)

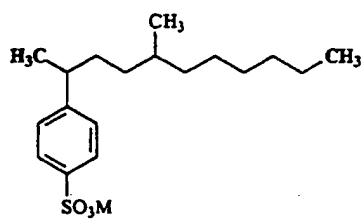


(i)

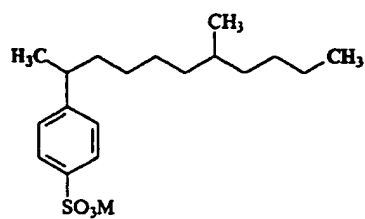


(j)

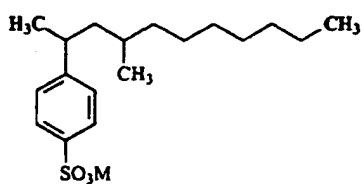


(k)

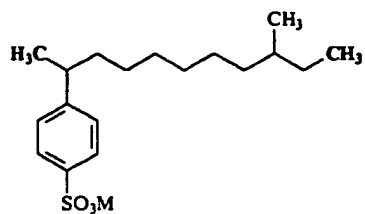


(l)




(m)




(n)




(o)




(p)

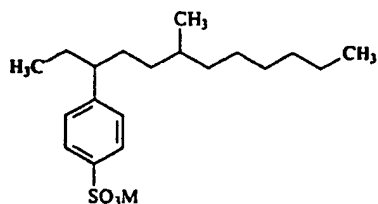


(q)

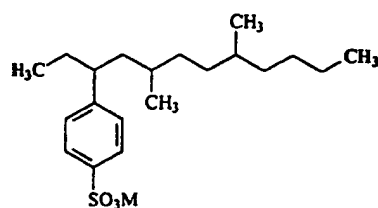


(r)




(s)



(t)

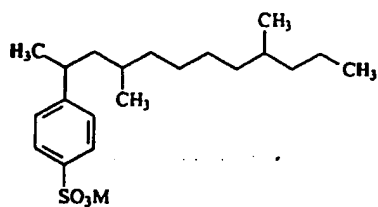


(u)

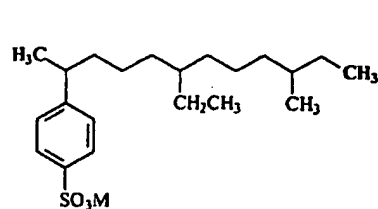


(v)

Structures (w) and (x) nonlimitingly illustrate less preferred compounds of Formula (I) which can be present, at lower levels than the above-illustrated preferred types of structures, in the modified alkylbenzene sulfonate surfactant mixtures of the invention and the resulting detergent compositions.

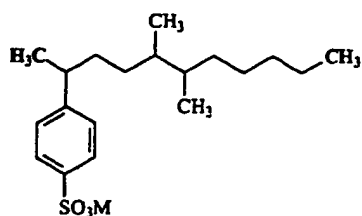


(w)

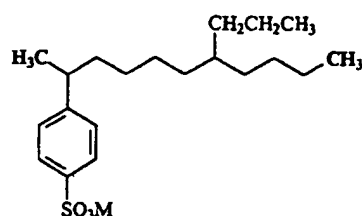


(x)


Structures (y), (z), and (aa) nonlimitingly illustrate compounds broadly within Formula (I) that are not preferred but which can be present in the modified alkylbenzene sulfonate surfactant mixtures of the invention and the resulting detergent compositions.

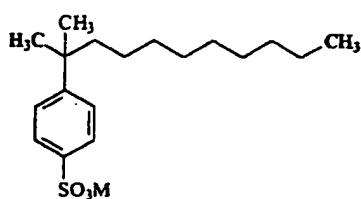


(y)

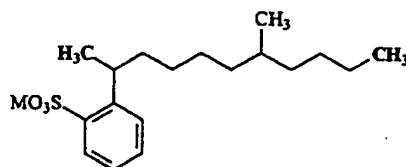

(z)



(aa)

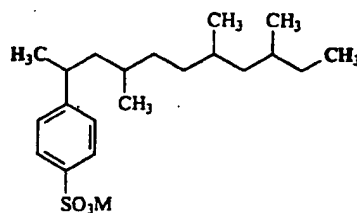

(bb)

Structure (bb) is illustrative of a tri-branched structure not within Formula (I), but that can be present as an impurity.

#### First Embodiment:

#### B. Modified Alkylbenzene sulfonate surfactant mixtures defined on the basis of their preparation

Preferably the modified alkylbenzene sulfonate surfactant mixtures herein are the product of sulfonating a modified alkylbenzene, (other than well known tetrapropylene or AB types) wherein the modified alkylbenzene is produced by alkylating benzene with a

5 branched olefin, other than tetrapropylene, and more particularly the lightly branched  
types described in more detail hereinafter, over an acidic mordenite-type catalyst or other  
10 suitable catalyst as defined elsewhere herein.

In certain cases, compositions herein can also be prepared by blending. Thus, the  
5 invention includes a detergent composition using a modified alkylbenzene sulfonate  
surfactant mixture according to the first embodiment wherein said modified alkylbenzene  
15 sulfonate surfactant mixture is prepared by a process comprising a step selected from: (i)  
blending a mixture of branched and linear alkylbenzene sulfonate surfactants having a  
2/3-phenyl index of 500 to 700 with an alkylbenzene sulfonate surfactant mixture having  
20 a 2/3-phenyl index of 75 to 160 and (ii) blending a mixture of branched and linear  
10 alkylbenzenes having a 2/3-phenyl index of 500 to 700 with an alkylbenzene mixture  
having a 2/3-phenyl index of 75 to 160 and sulfonating said blend.

25 In outline, modified alkylbenzene sulfonate surfactant mixtures herein can be  
made by the steps of:

- 15 (I) alkylating benzene with an alkylating mixture;  
(II) sulfonating the product of (I); and (optionally but very preferably)  
30 (III) neutralizing the product of (II).

Provided that suitable alkylation catalysts and process conditions as taught herein  
are used, the product of step (I) is a modified alkylbenzene mixture in accordance with the  
35 20 invention. Provided that sulfonation is conducted under conditions generally known and  
reapplicable from LAS manufacture, see for example the literature references cited herein,  
the product of step (II) is a modified alkylbenzene sulfonic acid mixture in accordance  
with the invention. Provided that neutralization step (III) is conducted as generally taught  
40 herein, the product of step (III) is a modified alkylbenzene sulfonate surfactant mixture in  
25 accordance with the invention. Since neutralization can be incomplete, mixtures of the  
acid and neutralized forms of the present modified alkylbenzene sulfonate systems in all  
proportions, e.g., from about 1000:1 to 1:1000 by weight, are also part of the present  
45 invention. Overall, the greatest criticalities are in step (I).

Preferred modified alkylbenzene sulfonate surfactant mixtures herein comprise the  
30 product of a process comprising the steps of: (I) alkylating benzene with an alkylating  
mixture; (II) sulfonating the product of (I); and (optionally but very preferably) (III)  
50



neutralizing the product of (II); wherein said alkylating mixture comprises: (a) from about 1% to about 99.9%, by weight of branched C<sub>9</sub>-C<sub>20</sub> (preferably C<sub>9</sub>-C<sub>15</sub>, more preferably C<sub>10</sub>-C<sub>14</sub>) monoolefins, said branched monoolefins having structures identical with those of the branched monoolefins formed by dehydrogenating branched paraffins of formula R<sup>1</sup>LR<sup>2</sup> wherein L is an acyclic aliphatic moiety consisting of carbon and hydrogen and containing two terminal methyls; R<sup>1</sup> is C<sub>1</sub> to C<sub>3</sub> alkyl; and R<sup>2</sup> is selected from H and C<sub>1</sub> to C<sub>3</sub> alkyl; and (b) from about 0.1% to about 85%, by weight of C<sub>9</sub>-C<sub>20</sub> (preferably C<sub>9</sub>-C<sub>15</sub>, more preferably C<sub>10</sub>-C<sub>14</sub>) linear aliphatic olefins; wherein said alkylating mixture contains said branched C<sub>9</sub>-C<sub>20</sub> monoolefins having at least two different carbon numbers in said C<sub>9</sub>-C<sub>20</sub> range, and has a mean carbon content of from about 9.0 to about 15.0 carbon atoms (preferably from about 10.0 to about 14.0, more preferably from about 11.0 to about 13.0, more preferably still from about 11.5 to about 12.5); and wherein said components (a) and (b) are at a weight ratio of at least about 15:85 (preferably having branched component (a) in excess of linear component (b), for example 51% or more by weight of (a) and 49% or less of (b), more preferably 60% to 95% by weight of (a) and 5% to 40% of (b), more preferably still 65% to 90% by weight of (a) and 10% to 35% of (b), more preferably still 70% to 85% by weight of (a) and 15% to 30% of (b) wherein these percentages by weight exclude any other materials, for example diluent hydrocarbons, that may be present in the process).

Also encompassed herein are modified alkylbenzene sulfonate surfactant mixtures consisting essentially of the product of a process comprising the steps, in sequence, of: (I) alkylating benzene with an alkylating mixture; (II) sulfonating the product of (I); and (III) neutralizing the product of (II); wherein said alkylating mixture comprises: (a) from about 1% to about 99.9%, by weight of a branched alkylating agent selected from: (i) C<sub>9</sub>-C<sub>20</sub> (preferably C<sub>9</sub>-C<sub>15</sub>, more preferably C<sub>10</sub>-C<sub>14</sub>) internal monoolefins R<sup>1</sup>LR<sup>2</sup> wherein L is an acyclic olefinic moiety consisting of carbon and hydrogen and containing two terminal methyls; (ii) C<sub>9</sub>-C<sub>20</sub> (preferably C<sub>9</sub>-C<sub>15</sub>, more preferably C<sub>10</sub>-C<sub>14</sub>) alpha monoolefins R<sup>1</sup>AR<sup>2</sup> wherein A is an acyclic alpha-olefinic moiety consisting of carbon and hydrogen and containing one terminal methyl and one terminal olefinic methylene; (iii) C<sub>9</sub>-C<sub>20</sub> (preferably C<sub>9</sub>-C<sub>15</sub>, more preferably C<sub>10</sub>-C<sub>14</sub>) vinylidene monoolefins R<sup>1</sup>BR<sup>2</sup> wherein B is an acyclic vinylidene olefin moiety consisting of carbon and hydrogen and containing two

terminal methyls and one internal olefinic methylene; (iv) C<sub>9</sub>-C<sub>20</sub> (preferably C<sub>9</sub>-C<sub>15</sub>, more preferably C<sub>10</sub>-C<sub>14</sub>) primary alcohols R<sup>1</sup>QR<sup>2</sup> wherein Q is an acyclic aliphatic primary terminal alcohol moiety consisting of carbon, hydrogen and oxygen and containing one terminal methyl; (v) C<sub>9</sub>-C<sub>20</sub> (preferably C<sub>9</sub>-C<sub>15</sub>, more preferably C<sub>10</sub>-C<sub>14</sub>) primary alcohols R<sup>1</sup>ZR<sup>2</sup> wherein Z is an acyclic aliphatic primary nonterminal alcohol moiety consisting of carbon, hydrogen and oxygen and containing two terminal methyls; and (vi) mixtures thereof; wherein in any of (i)-(vi), said R<sup>1</sup> is C<sub>1</sub> to C<sub>3</sub> alkyl and said R<sup>2</sup> is selected from H and C<sub>1</sub> to C<sub>3</sub> alkyl; and (b) from about 0.1% to about 85%, by weight of C<sub>9</sub>-C<sub>20</sub> (preferably C<sub>9</sub>-C<sub>15</sub>, more preferably C<sub>10</sub>-C<sub>14</sub>) linear alkylating agent selected from C<sub>9</sub>-C<sub>20</sub> (preferably C<sub>9</sub>-C<sub>15</sub>, more preferably C<sub>10</sub>-C<sub>14</sub>) linear aliphatic olefins, C<sub>9</sub>-C<sub>20</sub> (preferably C<sub>9</sub>-C<sub>15</sub>, more preferably C<sub>10</sub>-C<sub>14</sub>) linear aliphatic alcohols and mixtures thereof; wherein said alkylating mixture contains said branched alkylating agents having at least two different carbon numbers in said C<sub>9</sub>-C<sub>20</sub> (preferably C<sub>9</sub>-C<sub>15</sub>, more preferably C<sub>10</sub>-C<sub>14</sub>) range, and has a mean carbon content of from about 9.0 to about 15.0 carbon atoms (preferably from about 10.0 to about 14.0, more preferably from about 11.0 to about 13.0, more preferably still from about 11.5 to about 12.5); and wherein said components (a) and (b) are at a weight ratio of at least about 15:85 (preferably having branched component (a) in excess of linear component (b), for example 51% or more by weight of (a) and 49% or less of (b), more preferably 60% to 95% by weight of (a) and 5% to 40% of (b), more preferably still 65% to 90% by weight of (a) and 10% to 35% of (b), more preferably still 70% to 85% by weight of (a) and 15% to 30% of (b) wherein these percentages by weight exclude any other materials, for example diluent hydrocarbons, that may be present in the process).

In more highly preferred embodiments, the invention encompasses a modified alkylbenzene sulfonate surfactant mixture prepared in accordance with the above-outlined steps wherein said alkylating mixture consists essentially of: (a) from about 0.5% to about 47.5%, by weight of said branched alkylating agent selected from: (i) C<sub>9</sub>-C<sub>14</sub> internal monoolefins R<sup>1</sup>LR<sup>2</sup> wherein L is an acyclic olefinic moiety consisting of carbon and hydrogen and containing two terminal methyls; (ii) C<sub>9</sub>-C<sub>14</sub> alpha monoolefins R<sup>1</sup>AR<sup>2</sup> wherein A is an acyclic alpha-olefinic moiety consisting of carbon and hydrogen and containing one terminal methyl and one terminal olefinic methylene; and (iii) mixtures

thereof; wherein in any of (i)-(iii), said R<sup>1</sup> is methyl, and said R<sup>2</sup> is H or methyl provided that in at least about 0.7 mole fraction of the total of said monoolefins, R<sup>2</sup> is H; and (b) from about 0.1% to about 25%, by weight of C<sub>9</sub>-C<sub>14</sub> linear aliphatic olefins; and (c) from about 50% to about 98.9%, by weight of carrier materials selected from paraffins and inert nonparaffinic solvents;

wherein said alkylating mixture contains said branched alkylating agents having at least two different carbon numbers in said C<sub>9</sub>-C<sub>14</sub> range, and has a mean carbon content of from about 11.5 to about 12.5 carbon atoms; and wherein said components (a) and (b) are at a weight ratio of from about 51:49 to about 90:10.

Other modified alkylbenzene sulfonate surfactant mixtures herein are made by the above-outlined processes wherein in step (I), said alkylation is performed in the presence of an alkylation catalyst, said alkylation catalyst is an intermediate acidity solid porous alkylation catalyst, and step (II) comprises removal of components other than monoalkylbenzene prior to contacting the product of step (I) with sulfonating agent.

Also encompassed is the modified alkylbenzene sulfonate surfactant mixture according to the above-defined processes wherein said alkylation catalyst is other than a member selected from the group consisting of HF, AlCl<sub>3</sub>, sulfuric acid and mixtures thereof. Such is the case when the alkylation catalyst is selected from the group consisting of non-fluorinated acidic mordenite-type catalyst, fluorinated acidic mordenite-type catalyst and mixtures thereof. Catalysts are described in more detail hereinafter.

The processes are tolerant of variation, for example conventional steps can be added before, in parallel with, or after the outlined steps (I), (II) and (III). This is especially the case for accommodating the use of hydrotropes or their precursors. Thus the invention encompasses a modified alkylbenzene sulfonate surfactant mixture according to the above-outlined processes wherein a hydrotrope, hydrotrope precursor, or mixtures thereof is added after step (I); or the hydrotrope, hydrotrope precursor or mixtures thereof is added during or after step (II) and prior to step (III); or a hydrotrope can be added during or after step (III).

#### Sulfonation and Workup or Neutralization (Steps II / III)

In general, sulfonation of the modified alkylbenzenes in the instant process can be accomplished using any of the well-known sulfonation systems, including those

described in "Detergent Manufacture Including Zeolite Builders and other New Materials", Ed. Sittig., Noyes Data Corp., 1979, as well as in Vol. 56 in "Surfactant Science" series, Marcel Dekker, New York, 1996, including in particular Chapter 2 entitled "Alkylarylsulfonates: History, Manufacture, Analysis and Environmental Properties", pages 39-108 which includes 297 literature references. This work provides access to a great deal of literature describing various processes and process steps, not only sulfonation but also dehydrogenation, alkylation, alkylbenzene distillation and the like. Common sulfonation systems useful herein include sulfuric acid, chlorosulfonic acid, oleum, sulfur trioxide and the like. Sulfur trioxide/air is especially preferred. Details of sulfonation using a suitable air/sulfur trioxide mixture are provided in US 3,427,342, Chemithon. Sulfonation processes are further extensively described in "Sulfonation Technology in the Detergent Industry", W.H. de Groot, Kluwer Academic Publishers, Boston, 1991.

Any convenient workup steps may be used in the present process. Common practice is to neutralize after sulfonation with any suitable alkali. Thus the neutralization step can be conducted using alkali selected from sodium, potassium, ammonium, magnesium and substituted ammonium alkalis and mixtures thereof. Potassium can assist solubility, magnesium can promote soft water performance and substituted ammonium can be helpful for formulating specialty variations of the instant surfactants. The invention encompasses any of these derivative forms of the modified alkylbenzenesulfonate surfactants as produced by the present process and their use in consumer product compositions.

Alternately the acid form of the present surfactants can be added directly to acidic cleaning products, or can be mixed with cleaning ingredients and then neutralized.

The hydrotropes or hydrotrope precursors useful herein can in general be selected from any suitable hydrotrope or hydrotrope precursor, including lower alkyl ( $C_1-C_8$ ) aromatics and their sulfonic acids and sulfonate salts, but are more typically based on a sulfonic acid or sodium sulfonate salt of toluene, cumene, xylene, naphthalene or mixtures thereof. The hydrotrope precursors are selected from any suitable hydrotrope precursor, typically toluene, cumene, xylene, naphthalene or mixtures thereof. A hydrotrope

5

precursor is a compound that during step (III), namely the sulfonation step, is converted into a hydrotrope.

10

In terms of process conditions for alkylation, the invention encompasses a modified alkylbenzene sulfonate surfactant mixture wherein in step (I) said alkylation is performed at a temperature of from about 125°C to about 230°C (preferably from about 175°C to about 215°C) and at a pressure of from about 50 psig to about 1000 psig (preferably from about 100 psig to about 250 psig). Preferably in step (I) said alkylation is performed at a temperature of from about 175°C to about 215°C, at a pressure of from about 100 psig to about 250 psig, and a time of from about 0.01 hour to about 18 hours (preferably, as rapidly as possible, more typically from about 0.1 hour to about 5 hours). If desired such alkylation may be conducted in one or more stages. Different stages of the process can be conducted in different manufacturing facilities. Typically in practice, LAB manufacturers will conduct step (I), with detergent manufacturers conducting step (III). Step (II) is typically conducted by either, or can even be conducted by third party manufacturers.

15

20

25

15

30

In general it is found preferable in step (I) to couple together the use of relatively low temperatures (e.g., 175°C to about 215°C) with reaction times of medium duration (1 hour to about 8 hours) in the above-indicated ranges.

35

It is possible even to "target" for desirably low 2-methyl-2-phenyl index in the present inventive compositions by selecting a relatively low reaction temperature, e.g., about 190°C, and to monitor the progress of the reaction by any convenient means (e.g., sampling and NMR analysis) to assure adequate completion while minimizing 2-methyl-2-phenyl index.

40

Moreover, it is contemplated that the alkylation "step" (I) herein can be "staged" so that two or more reactors operating under different conditions in the defined ranges may be useful. By operating a plurality of such reactors, it is possible to allow for material with less preferred 2-methyl-2-phenyl index to be initially formed and, surprisingly, to convert such material into material with a more preferred 2-methyl-2-phenyl index.

45

In terms of sulfonating agent selection, the invention encompasses a modified alkylbenzene sulfonate surfactant mixture wherein step (II) is performed using a sulfonating agent selected from the group consisting of sulfur trioxide, sulfur trioxide/air

50

55

5 mixtures, and sulfuric acid (including oleum). Chlorosulfonic acid or other known  
sulfonating agents, while less commercially relevant, are also useful and are included for  
10 use in the invention.

Although in general, neutralization step (III) can be carried out with any suitable  
5 alkali, the invention includes a modified alkylbenzene sulfonate surfactant mixture  
wherein said step (III) is performed using a basic salt, said basic salt having a cation  
15 selected from the group consisting of alkali metal, alkaline earth metal, ammonium,  
substituted ammonium, and mixtures thereof and an anion selected from hydroxide,  
oxide, carbonate, silicate, phosphate, and mixtures thereof. Preferred basic salt is selected  
20 from the group consisting of sodium hydroxide, sodium silicate, potassium hydroxide,  
potassium silicate, magnesium hydroxide, ammonium hydroxide, and mixtures thereof.

#### Alkylation Catalyst

To secure the modified alkylbenzene sulfonate surfactant mixtures of the  
25 invention, the present invention uses a particularly defined alkylation catalyst. Said  
alkylation catalyst is an intermediate acidity solid porous alkylation catalyst defined in  
detail hereinafter. Particularly preferred alkylation catalysts comprise at least partially  
30 dealuminized acidic fluoridated mordenites, at least partially dealuminized acidic  
nonfluoridated mordenites, and mixtures thereof.

Numerous alkylation catalysts are unsuitable for making the present modified  
35 alkylbenzene mixtures and modified alkylbenzene sulfonate surfactant mixtures.  
Unsuitable alkylation catalysts include any of: sulfuric acid, aluminum chloride, and HF.  
Also unsuitable are non-acidic calcium mordenite, and many others. Other catalysts, such  
as the DETAL® process catalysts of UOP are also unsuitable, at least in their current  
40 commercial executions. Indeed no alkylation catalyst currently used for alkylation in the  
commercial production of detergent C10-C14 linear alkylbenzene sulfonates for use in  
25 laundry products are suitable.

In contrast, suitable alkylation catalysts herein are selected from shape-selective  
45 moderately acidic alkylation catalysts, preferably zeolitic. The zeolite catalyst used for the  
alkylation step (I) is preferably selected from the group consisting of mordenite, HZSM-  
30 12, and offretite, any of these being in at least partially acidic form. Mixtures can be used  
and the catalysts can be combined with binders etc. as described hereinafter. More

preferably, the zeolite is substantially in acid form and is contained in a catalyst pellet comprising a conventional binder and further wherein said catalyst pellet comprises at least about 1 %, more preferably at least 5%, more typically from 50% to about 90%, of said zeolite.

More generally, a suitable alkylation catalyst is typically at least partially crystalline, more preferably substantially crystalline not including binders or other materials used to form catalyst pellets, aggregates or composites. Moreover the catalyst is typically at least partially acidic. Fully exchanged Ca-form mordenite, for example, is unsuitable whereas H-form mordenite is suitable.

The pores characterizing the zeolites useful in the present alkylation process may be substantially circular, uniform pores of about 6.2 Angstrom, or preferably may be somewhat elliptical, such as in mordenite. It should be understood that, in any case, the zeolites used as catalysts in the alkylation step of the present process have a major pore dimension intermediate between that of the large pore zeolites, such as the X and Y zeolites, and the relatively small pore size zeolites ZSM-5 and ZSM-11, and preferably between about 6 Angstrom and about 7 Angstrom. Indeed ZSM-5 has been tried and found inoperable in the present invention. The pore size dimensions and crystal structures of certain zeolites are specified in ATLAS OF ZEOLITE STRUCTURE TYPES by W. M. Meier and D. H. Olson, published by the Structure Commission of the International Zeolite Association (1978 and more recent editions) and distributed by Polycrystal Book Service, Pittsburgh, Pa.

The zeolites useful in the alkylation step of the instant process generally have at least 10 percent of the cationic sites thereof occupied by ions other than alkali or alkaline-earth metals. Typical but non-limiting replacing ions include ammonium, hydrogen, rare earth, zinc, copper and aluminum. Of this group, particular preference is accorded ammonium, hydrogen, rare earth or combinations thereof. In a preferred embodiment, the zeolites are converted to the predominantly hydrogen form, generally by replacement of the alkali metal or other ion originally present with hydrogen ion precursors, e.g., ammonium ions, which upon calcination yield the hydrogen form. This exchange is conveniently carried out by contact of the zeolite with an ammonium salt solution, e.g., ammonium chloride, utilizing well known ion exchange techniques. In certain preferred

embodiments, the extent of replacement is such as to produce a zeolite material in which at least 50 percent of the cationic sites are occupied by hydrogen ions.

The zeolites may be subjected to various chemical treatments, including alumina extraction (dealumination) and combination with one or more metal components, particularly the metals of Groups IIB, III, IV, VI, VII and VIII. It is also contemplated that the zeolites may, in some instances, desirably be subjected to thermal treatment, including steaming or calcination in air, hydrogen or an inert gas, e.g. nitrogen or helium.

A suitable modifying treatment entails steaming of the zeolite by contact with an atmosphere containing from about 5 to about 100% steam at a temperature of from about 250°C to 1000°C. Steaming may last for a period of between about 0.25 and about 100 hours and may be conducted at pressures ranging from sub-atmospheric to several hundred atmospheres.

In practicing the desired alkylation step of the instant process, it may be useful to incorporate the above-described intermediate pore size crystalline zeolites in another material, e.g., a binder or matrix resistant to the temperature and other conditions employed in the process. Such matrix materials include synthetic or naturally occurring substances as well as inorganic materials such as clay, silica, and/or metal oxides. Matrix materials can be in the form of gels including mixtures of silica and metal oxides. The latter may be either naturally occurring or in the form of gels or gelatinous precipitates. Naturally occurring clays which can be composited with the zeolite include those of the montmorillonite and kaolin families, which families include the sub-bentonites and the kaolins commonly known as Dixie, McNamee-Georgia and Florida clays or others in which the main mineral constituent is halloysite, kaolinite, dickite, nacrite or anauxite. Such clays can be used in the raw state as originally mined or initially subjected to calcination, acid treatment or chemical modification.

In addition to the foregoing materials, the intermediate pore size zeolites employed herein may be compounded with a porous matrix material, such as alumina, silica-alumina, silica-magnesia, silica-zirconia, silica-thoria, silica-beryllia, and silica-titania, as well as ternary combinations, such as silica-alumina-thoria, silica-alumina-zirconia, silica-alumina-magnesia and silica-magnesia-zirconia. The matrix may be in the form of a cogel. The relative proportions of finely divided zeolite and inorganic oxide gel matrix



5 may vary widely, with the zeolite content ranging from between about 1 to about 99% by weight and more usually in the range of about 5 to about 80% by weight of the composite.

10 A group of zeolites which includes some useful for the alkylation step herein have a silica:alumina ratio of at least 2:1, preferably at least 10:1 more preferably at least 20:1.

5 The silica:alumina ratios referred to in this specification are the structural or framework ratios, that is, the ratio for the  $\text{SiO}_4$  to the  $\text{AlO}_4$  tetrahedra. In practice, silica:alumina ratios as determined by various physical and chemical methods are acceptable for use herein. It should be understood that such methods may acceptably give some variation. For example, a gross chemical analysis may include aluminum which is present in the  
20 form of cations associated with the acidic sites on the zeolite, thereby giving a somewhat low experimentally determined silica:alumina ratio. Similarly, if the ratio is determined by thermogravimetric analysis (TGA) of ammonia desorption, a somewhat low ammonia titration may be obtained if cationic aluminum prevents exchange of the ammonium ions  
25 onto the acidic sites. These disparities are well known in the art. They can be troublesome when certain treatments, such as the dealuminization methods described below which result in the presence of ionic aluminum free of the zeolite structure, are employed. Due  
30 care should therefore be taken to ensure that the framework silica:alumina ratio is correctly determined to the extent acceptable to a practitioner of the art.

When the zeolites have been prepared in the presence of organic cations they are  
35 typically catalytically inactive, commonly because the intracrystalline free space is occupied by organic cations from the forming solution. They may be activated by heating in an inert atmosphere at  $540^\circ\text{C}$  for one hour, for example, followed by base exchange with ammonium salts followed by calcination at  $540^\circ\text{C}$  in air. The presence of organic  
40 cations in the forming solution may not be absolutely essential to the formation of the zeolite; but it does appear to favor the formation of this special type of zeolite. Some  
25 natural zeolites may sometimes be converted to zeolites of the desired type by various activation procedures and other treatments such as base exchange, steaming, alumina extraction and calcination. The zeolites preferably have a crystal framework density, in the dry hydrogen form, not substantially below about  $1.6 \text{ g/cm}^3$ . The dry density for  
45 known structures may be calculated from the number of silicon plus aluminum atoms per  
30 1000 cubic Angstroms, as given, e.g., on page 19 of the article on Zeolite Structure by W.

5 M. Meier included in "Proceedings of the Conference on Molecular Sieves, London, April  
1967", published by the Society of Chemical Industry, London, 1968. Reference is made  
10 to this paper for a discussion of the crystal framework density. A further discussion of  
crystal framework density, together with values for some typical zeolites, is given in U.S.  
5 Pat. No. 4,016,218, to which reference is made. When synthesized in the alkali metal  
15 form, the zeolite is conveniently converted to the hydrogen (acidic) form, generally via  
intermediate formation of the ammonium form by ammonium ion exchange and  
calcination of the ammonium form to yield the hydrogen form. It has been found that  
20 although the hydrogen form of the zeolite catalyzes the reaction successfully, the zeolite  
10 may also be partly in the alkali metal form and/or the form of other metal salts.

EP 466,558 describes an acidic mordenite type alkylation catalyst also of possible  
use herein having overall Si/Al atomic ratio of 15-85 (15-60), Na weight content is less  
25 than 1000 ppm (preferably less than 250 ppm), and there is a low or zero content of extra-  
network Al species; the elementary mesh volume as defined in EP 466,558 is below 2,760  
15 nm<sup>3</sup>.

US 5,057,472 is likewise useful for preparing alkylation catalysts herein and  
relates to concurrent dealumination and ion-exchange of an acid-stable Na ion-containing  
zeolite, preferably mordenite, effected by contact of the zeolite with a 0.5-3 (preferably 1-  
2.5) M HNO<sub>3</sub> solution containing sufficient NH<sub>4</sub>NO<sub>3</sub> to fully exchange the Na<sup>+</sup> ions for  
35 20 NH<sub>4</sub><sup>+</sup> and H<sup>+</sup> ions. The resulting zeolites can have a SiO<sub>2</sub>:Al<sub>2</sub>O<sub>3</sub> ratio of 15:1 to 26:1,  
preferably 17:1 to 23:1, and are preferably calcined to at least partially convert the  
NH<sub>4</sub><sup>+</sup>/H<sup>+</sup> form to the H<sup>+</sup> form. Optionally, though not necessarily particularly desirable in  
the present invention, the catalyst can contain a Group VIII metal (and optionally also an  
40 inorganic oxide) together with the calcined zeolite of '472.

25 Another acidic mordenite catalyst useful for the alkylation step herein is disclosed  
in US 4,861,935 which relates to a hydrogen form of mordenite incorporated with  
alumina, the composition having a surface area of at least 580 m<sup>2</sup> /g. Other acidic  
mordenite catalysts useful for the alkylation step herein include those described in US  
5,243,116 and US 5,198,595. Yet another alkylation catalyst useful herein is described in  
30 US 5,175,135 which is an acid mordenite zeolite having a silica/alumina molar ratio of at  
least 50:1, a Symmetry Index of at least 1.0 as determined by X-ray diffraction analysis,

5 and a porosity such that the total pore volume is in the range from about 0.18 cc/g to about 0.45 cc/g and the ratio of the combined meso- and macropore- volume to the total  
10 pore volume is from about 0.25 to about 0.75.

Particularly preferred alkylation catalysts herein include the acidic mordenite  
5 catalysts Zeocat<sup>TM</sup> FM-8/25H available from Zeochem; CBV 90 A available from Zeolyst International, and LZM-8 available from UOP Chemical Catalysts as well as fluoridated  
15 versions of the above commercial catalysts. Fluoridated mordenites can be prepared by a number of ways. A method of providing a particularly useful fluoridated mordenite is described in US 5,777,187. The invention encompasses preferred embodiments in which  
20 the mordenites are fluoridated, but also has other preferred embodiments in which the mordenites are non-fluoridated.

Most generally, any alkylation catalyst may be used herein provided that the  
25 alkylation catalyst can (a) accommodate branched olefins as described elsewhere herein into the smallest pore diameter of said catalyst and (b) selectively alkylate benzene with  
15 said branched olefins and optionally mixtures thereof with nonbranched olefins. Acceptable selectivity is in accordance with a 2/3-Phenyl index of about 275 to about  
30 10,000 as defined herein.

In other terms, the catalyst selections herein are made in part with the intention of  
35 minimizing internal alkylbenzene formation (e.g., 4-phenyl, 5-phenyl ...) The formulators contributing to the present invention have unexpectedly discovered that control of internal alkylbenzene sulfonate isomers in the present inventive surfactant  
20 mixtures in conjunction with introduction of limited methyl branching is very helpful for improving their performance. The present invention connects this discovery to discoveries of the synthesis chemists in the present invention, who have determined how to control  
40 internal isomer content while providing limited methyl branching in the modified alkylbenzene sulfonate surfactant mixtures in accordance with the formulators' prescriptions.  
45

The extent to which internal isomer content needs to be controlled can vary  
50 depending on the consumer product application and on whether outright best performance or a balance of performance and cost is required. In absolute terms, the amount of internal isomer such as internal alkylbenzene isomer is preferably always kept below 25% by

weight, but for best results, from 0 to 10%, preferably less than about 5% by weight. "Internal alkylbenzene" isomers as defined herein include alkylbenzenes having phenyl attachment to an aliphatic chain in the 4,5,6 or 7 position.

Without intending to be limited by theory, there are two reasons for which it is believed that the preferred alkylation catalysts are the above-described shape selective zeolitic type catalysts, especially mordenites. The first reason is to provide the selectivity of formation of preferred compounds such as branched and nonbranched 2-phenyl and 3-phenylalkylbenzenes. This selectivity is measured by the 2/3-phenyl index. The second reason is to control the amount of quaternary alkylbenzenes and thus quaternary alkylbenzenesulfonates.

Results with alkylation catalysts such as HF can give quite high levels of quaternary alkylbenzenes as shown in the literature (see J. Org. Chem. Vol 37, No. 25, 1972). This contrasts with the surprising discovery as part of the present invention that one can attain low levels of quaternary alkylbenzenes in catalyzed reactions of benzene with branched olefins, as characterized by 2-methyl-2-phenyl index. Even when the olefins used are substantially dibranched, as illustrated herein, a low 2-methyl-2-phenyl index of less than 0.1 can surprisingly be obtained.

#### Second Embodiment:

##### Detergent Compositions

The present invention has numerous detergent composition embodiments, including the detergent composition comprising: (a) from about 1% to about 50%, preferably from about 2% to about 30%, by weight of modified alkylbenzene sulfonate surfactant mixture according to the first embodiment, wherein said modified alkylbenzene sulfonate surfactant mixture has a 2-methyl-2-phenyl index of less than about 0.3, preferably of from 0 to 0.2, more preferably no more than about 0.1, more preferably still, no more than about 0.05; (b) from about 0.000001% to about 10%, preferably from about 0.01% to about 2%, of a member selected from the group consisting of optical brighteners, dyes, photobleaches, hydrophobic bleach activators and transition metal bleach catalysts, preferably at least two of said member components, more preferably at least two of said member components including an optical brightener as one of the member components; (c) from 0.1% to about 40% by weight (preferably not more than

about 30%) f surfactants selected from the group consisting of cationic surfactants, nonionic surfactants, anionic surfactants, and amine oxide surfactants (more preferably at least one cationic surfactant is present at a level of from about 0.2% to about 5% by weight, or at least one nonionic surfactant is present at a level of from about 0.5% to about 25% by weight, or at least one alkyl sulfate surfactant or alkyl(polyalkoxy)sulfate surfactant is present at a level of from about 0.5% to about 25% by weight); and (d) from about 10% to about 99% of conventional cleaning adjuncts (other than any of (a) - (c)); provided that when said detergent composition comprises any alkylbenzene sulfonate surfactant other than said modified alkylbenzene sulfonate surfactant mixture (for example as a result of blending into the detergent composition one or more commercial, especially linear, typically linear C<sub>10</sub>-C<sub>14</sub>, alkylbenzene sulfonate surfactants), said detergent composition is further characterized by an overall 2/3-phenyl index of at least about 200, preferably at least about 250, more preferably at least about 350, more preferably still, at least about 500, wherein said overall 2/3-phenyl index is determined by measuring 2/3-phenyl index, as defined herein, on a blend of said modified alkylbenzene sulfonate surfactant mixture and said any other alkylbenzene sulfonate to be added to said detergent composition, said blend, for purposes of measurement, being prepared from aliquots of said modified alkylbenzene sulfonate surfactant mixture and said other alkylbenzene sulfonate not yet exposed to any other of said components of the detergent composition; and further provided that when said detergent composition comprises any alkylbenzene sulfonate surfactant other than said modified alkylbenzene sulfonate surfactant mixture (for example as a result of blending into the detergent composition one or more commercial, especially linear, typically linear C<sub>10</sub>-C<sub>14</sub>, alkylbenzene sulfonate surfactants), said detergent composition is further characterized by an overall 2-methyl-2-phenyl index of less than about 0.3, preferably from 0 to 0.2, more preferably no more than about 0.1, more preferably still, no more than about 0.05, wherein said overall 2-methyl-2-phenyl index is to be determined by measuring 2-methyl-2-phenyl index, as defined herein, on a blend of said modified alkylbenzene sulfonate surfactant mixture and any other alkylbenzene sulfonate to be added to said detergent composition, said blend, for purposes of measurement, being prepared from aliquots of said modified alkylbenzene

5 sulfonate surfactant mixture and said other alkylbenzene sulfonate not yet exposed to any other of said components of the detergent composition.

10 Preferably, said conventional cleaning adjunct comprises from about 0.1% to about 5% of a cationic surfactant, such as one selected from linear and branched, substituted and unsubstituted, C<sub>8</sub>-C<sub>16</sub> alkyl ammonium salts.

15 Numerous variations of the present detergent compositions are useful. Such variations include:

- the detergent composition which is substantially free from alkylbenzene sulfonate surfactants other than said modified alkylbenzene sulfonate surfactant mixture;
- 20 • the detergent composition which comprises, in said component (c), at least about 0.1%, preferably no more than about 10%, more preferably no more than about 5%, more preferably still, no more than about 1%, of a commercial C<sub>10</sub>-C<sub>14</sub> linear alkylbenzene sulfonate surfactant;
- 25 • the detergent composition which comprises, in said component (c), at least about 0.1%, preferably no more than about 10%, more preferably no more than about 5%, more preferably still, no more than about 1%, of a commercial highly branched alkylbenzene sulfonate surfactant. (e.g., TPBS or tetrapropylbenzene sulfonate);
- 30 • the detergent composition which comprises, in said component (c), a nonionic surfactant at a level of from about 0.5% to about 25% by weight of said detergent composition, and wherein said nonionic surfactant is a polyalkoxylated alcohol in capped or non-capped form having: - a hydrophobic group selected from linear C<sub>10</sub>-C<sub>16</sub> alkyl, mid-chain C<sub>1</sub>-C<sub>3</sub> branched C<sub>10</sub>-C<sub>16</sub> alkyl, guerbet branched C<sub>10</sub>-C<sub>16</sub> alkyl, and mixtures thereof and - a hydrophilic group selected from 1-15 ethoxylates, 1-15 propoxylates 1-15 butoxylates and mixtures thereof, in capped or uncapped form. (when uncapped, there is also present a terminal primary -OH moiety and when capped, there is also present a terminal moiety of the form -OR wherein R is a C<sub>1</sub>-C<sub>6</sub> hydrocarbyl moiety, optionally comprising a primary or, preferably when present, a secondary alcohol.);
- 35 • the detergent composition which comprises, in said component (c), an alkyl sulfate surfactant at a level of from about 0.5% to about 25% by weight of said detergent composition, wherein said alkyl sulfate surfactant has a hydrophobic group selected from

linear C<sub>10</sub>-C<sub>18</sub> alkyl, mid-chain C<sub>1</sub>-C<sub>3</sub> branched C<sub>10</sub>-C<sub>18</sub> alkyl, guerbet branched C<sub>10</sub>-C<sub>18</sub> alkyl, and mixtures thereof and a cation selected from Na, K and mixtures thereof;

• the detergent composition which comprises, in said component (c), an alkyl(polyalkoxy)sulfate surfactant at a level of from about 0.5% to about 25% by weight of said detergent composition, wherein said alkyl(polyalkoxy)sulfate surfactant has - a hydrophobic group selected from linear C<sub>10</sub>-C<sub>16</sub> alkyl, mid-chain C<sub>1</sub>-C<sub>3</sub> branched C<sub>10</sub>-C<sub>16</sub> alkyl, guerbet branched C<sub>10</sub>-C<sub>16</sub> alkyl, and mixtures thereof and - a (polyalkoxy)sulfate hydrophilic group selected from 1-15 polyethoxysulfate, 1-15 polypropoxysulfate, 1-15 polybutoxysulfate, 1-15 mixed poly(ethoxy/propoxy/butoxy)sulfates, and mixtures thereof, in capped or uncapped form; and - a cation selected from Na, K and mixtures thereof;

• the detergent composition having the form of a heavy-duty liquid detergent;

• the detergent composition having the form of a syndet laundry bar;

• the detergent composition having the form of a heavy-duty granule;

• the detergent composition having the form of a heavy-duty granule and wherein said conventional cleaning adjunct (d) comprises from about 10% to about 50% by weight of said detergent composition of a nonphosphate builder;

• the detergent composition having the form of a heavy-duty granule and wherein said conventional cleaning adjunct (d) comprises from about 10% to about 50% by weight of said detergent composition of a phosphate builder; and

• the detergent composition having the form of a heavy-duty granule and wherein said conventional cleaning adjunct (d) comprises as said phosphate builder a member selected from the group consisting of sodium tripolyphosphate.

Further the present invention includes a detergent composition comprising (preferably consisting essentially of): (a) from about 0.1% to about 95%, by weight (preferably from about 0.5% to about 50%, more preferably from about 1%, preferably at least 2%, more preferably at least 4%, more preferably at least 6%, more preferably still at least 8% to about 35%) of modified alkylbenzene sulfonate surfactant mixture according to the invention; (b) from about 0.00001% to about 99.9% (preferably from about 5% to about 98%, more preferably from about 50% to about 95%) of conventional cleaning adjuncts other than surfactants; and (c) from 0% to about 50%, by weight (in some

5 preferred embodiments, 0%, and in others preferably from about 0.1% to about 30%,  
more typically from about 0.2% to about 10%), of a surfactant other than said modified  
10 alkylbenzene sulfonate surfactant mixture; provided that when said detergent composition  
comprises any other alkylbenzene sulfonate than the alkylbenzene sulfonate of said  
5 modified alkylbenzene sulfonate surfactant mixture, said modified alkylbenzene sulfonate  
surfactant mixture and said other alkylbenzene sulfonate, as a mixture, have an overall  
15 2/3-phenyl index of from about 275 to about 10,000 (preferably from about 350 to about  
1200, more preferably from about 500 to about 700).

In another detergent embodiment, there is encompassed herein a detergent  
20 composition comprising: (a) from about 0.1% to about 95%, by weight (preferably from  
about 0.5% to about 50%, more preferably from about 1% to about 35%) of modified  
alkylbenzene sulfonate surfactant mixture of the invention; (b) from about 0.00001% to  
25 about 99.9% (preferably from about 5% to about 98%, more preferably from about 50%  
to about 95%) of conventional cleaning adjuncts other than surfactants; and (c) from 0.1%  
15 to about 50%, by weight (preferably from about 0.1% to about 35%, more typically from  
about 1% to about 15%) of surfactants other than alkylbenzene sulfonates (preferably, one  
or more surfactants selected from the group consisting of cationic surfactants, anionic  
30 surfactants, and anionic surfactants other than alkylbenzene sulfonates, more preferably  
wherein a cationic surfactant is present, said cationic surfactant is at a level of from about  
20 0.2% to about 5%); provided that when said detergent composition comprises any other  
alkylbenzene sulfonate than the alkylbenzene sulfonate of said modified alkylbenzene  
35 sulfonate surfactant mixture, said modified alkylbenzene sulfonate surfactant mixture and  
said other alkylbenzene sulfonate, as a mixture, have an overall 2/3-phenyl index of from  
40 about 275 to about 10,000.

25 The invention also includes a detergent composition consisting essentially of:  
(a) from about 1% to about 50% (preferably from about 1% to about 35%), by weight of  
45 modified alkylbenzene sulfonate surfactant mixture according to the first embodiment of  
the invention; (b) from about 0.00001% to about 99.9% (preferably from about 5% to  
about 98%, more preferably from about 50% to about 95%) of conventional cleaning  
30 adjuncts other than surfactants; and (c) from 0.1% to about 50% (preferably from about  
50 0.1% to about 35%, more typically from about 1% to about 15%) by weight of surfactants



other than alkylbenzene sulfonates (preferably, one or more surfactants selected from the group consisting of cationic surfactants, anionic surfactants, and anionic surfactants other than alkylbenzene sulfonates, more preferably wherein a cationic surfactant is present at a level of from about 0.2% to about 5%); and (d) from 0.1% to about 95% water.

Likewise part of the invention is a detergent composition consisting essentially of:

(a) from about 0.1% to about 95%, by weight of modified alkylbenzene sulfonate surfactant mixture according to the first embodiment; and

(b) from about 0.00001% to about 99.9% of conventional cleaning adjuncts other than surfactants.

More generally, detergent compositions can include the modified alkylbenzene sulfonate surfactant mixtures together with any conventional cleaning adjunct other than surfactants, such as those wherein the adjunct is selected from the group consisting of builders, deterative enzymes, bleaching systems, brighteners, at least partially water-soluble or water dispersible polymers, abrasives, bactericides, tarnish inhibitors, dyes, solvents, hydrotropes, perfumes, thickeners, antioxidants, processing aids, suds boosters, suds suppressors, buffers, anti-fungal agents, mildew control agents, insect repellents, anti-corrosive aids, chelants and mixtures thereof.


Also more generally, the inventive detergent compositions can take the form of a liquid, powder, agglomerate, paste, tablet, bar, gel, or granule.

Related to the detergent composition embodiments are methods of their use, such as a method comprising treating a fabric with the detergent composition of the invention. Such methods are part of the present invention.

#### Third Embodiment:

##### Modified Alkylbenzene Mixtures

The present invention also includes a modified alkylbenzene mixture comprising (preferably consisting essentially of): (a) from about 60% to about 95% (preferably from about 65% to about 90%, more preferably from about 70% to about 85% ) by weight of a mixture of branched alkylbenzenes having formula (I):



(I)

wherein L is an acyclic aliphatic moiety consisting of carbon and hydrogen and having two methyl termini, and wherein said mixture of branched alkylbenzenes contains two or more compounds of said formula (I) differing in molecular weight and wherein said mixture of branched alkylbenzenes is characterized by a sum of carbon atoms in R<sup>1</sup>, R<sup>2</sup> and L of from 9 to 15, preferably from 10 to 14; and an average aliphatic carbon content (i.e., excluding A), based on the sum of R<sup>1</sup>, L and R<sup>2</sup>, of from about 10.0 to about 14.0, preferably from about 11.0 to about 13.0, more preferably from about 11.5 to about 12.5 carbon atoms; and further, wherein L has no substituents other than A, R<sup>1</sup> and R<sup>2</sup>; R<sup>1</sup> is C<sub>1</sub>-C<sub>3</sub> alkyl (preferably C<sub>1</sub>-C<sub>2</sub> alkyl, more preferably methyl); R<sup>2</sup> is selected from H and C<sub>1</sub>-C<sub>3</sub> alkyl (preferably H and C<sub>1</sub>-C<sub>2</sub> alkyl, more preferably H and methyl, more preferably H and methyl provided that in at least about 0.5, more preferably 0.7, more preferably 0.9 to 1.0 mole fraction of said branched alkylbenzene sulfonates, R<sup>2</sup> is H); A is a (nonsulfonated) benzene moiety (C<sub>6</sub>H<sub>5</sub>- having no substituents other than L); and (b) from about 5% to about 40% (preferably from about 10% to about 35%, more preferably from about 15% to about 30%) by weight of a mixture of nonbranched alkylbenzenes having formula (II):




(II)

wherein A is a (nonsulfonated) benzene moiety (C<sub>6</sub>H<sub>5</sub>- having no substituents other than L) and Y is an unsubstituted linear aliphatic moiety consisting of carbon and hydrogen having two methyl termini, and wherein Y has from 9 to 15 carbon atoms in total (preferably from 10 to 14) and said mixture of nonbranched alkylbenzenes has an average aliphatic carbon content (i.e., carbon content excluding A) of from about 10.0 to about 14.0 carbon atoms, preferably from about 11.0 to about 13.0 carbon atoms, more preferably from about 11.5 to about 12.5 carbon atoms; and

wherein said modified alkylbenzene mixture is further characterized by a 2/3-phenyl index of from about 275 to about 10,000, more preferably from about 350 to about 1200, more preferably still from about 500 to about 700, and a 2-methyl-2-phenyl index of less than about 0.3, preferably from 0 to about 0.2, more preferably no more than about 0.1, more preferably still, 0.05 or less.

In another example, the invention includes a modified alkylbenzene mixture comprising: I) from 20% to about 99%, (or more, preferably 40% or more, more preferably more than half, e.g., 60% or more, more preferably still 70% or more), by weight of a first alkylbenzene mixture, wherein said first alkylbenzene mixture (itself a type of modified alkylbenzene mixture in accordance with the invention) consists essentially of: a) from about 60% to about 95% by weight of a mixture of branched alkylbenzenes having formula (I):



(I)

wherein L is an acyclic aliphatic moiety consisting of carbon and hydrogen and having two methyl termini, and wherein said mixture of branched alkylbenzenes contains two or more compounds of said formula (I) differing in molecular weight and wherein said mixture of branched alkylbenzenes is characterized by a sum of carbon atoms in  $R^1$ ,  $R^2$  and L of from 9 to 15, preferably from 10 to 14; and an average aliphatic carbon content, based on the sum of  $R^1$ , L and  $R^2$ , of from about 10.0 to about 14.0, preferably from about 11.0 to about 13.0, more preferably from about 11.5 to about 12.5 carbon atoms; and further, wherein L has no substituents other than A,  $R^1$  and  $R^2$ ;  $R^1$  is  $C_1$ - $C_3$  alkyl (preferably  $C_1$ - $C_2$  alkyl, more preferably methyl);  $R^2$  is selected from H and  $C_1$ - $C_3$  alkyl (preferably H and  $C_1$ - $C_2$  alkyl, more preferably H and methyl, more preferably H and methyl provided that in at least about 0.5, more preferably 0.7, more preferably 0.9 to 1.0 mole fraction of said branched alkylbenzene sulfonates,  $R^2$  is H); A is a (nonsulfonated) benzene moiety ( $C_6H_5$ - having no substituents other than L); and b) from about 5% to about 40% by weight (preferably no more than about 35%, more preferably no more than about 30%) of a mixture of nonbranched alkylbenzenes having formula (II):



(II)

wherein A is a (nonsulfonated) benzene moiety ( $\text{C}_6\text{H}_5$ - having no substituents other than A) and Y is an unsubstituted linear aliphatic moiety consisting of carbon and hydrogen having two methyl termini, and wherein Y has from 9 to 15, preferably from 10 to 14 carbon atoms in total and said mixture of nonbranched alkylbenzenes has an average aliphatic carbon content of from about 10.0 to about 14.0, preferably from about 11.0 to about 13.0, more preferably from about 11.5 to about 12.5 carbon atoms; wherein said first alkylbenzene mixture has a 2/3-phenyl index of from about 275 to about 10,000, more preferably from about 350 to about 1200, more preferably at least about 500; and II) the balance, no more than about 80%, (preferably no more than about 60%, more preferably less than half, e.g., no more than about 40%, more preferably still no more than about 25%), by weight of a second alkylbenzene mixture, wherein said second alkylbenzene mixture has a 2/3-phenyl index of from about 75 to about 160 (typical of current commercial LAB or LAS); and wherein said modified alkylbenzene mixture has an overall 2/3-phenyl index of from about 165 to about 10,000 (preferably from about 170 to about 1200, more preferably from about 180 to about 700).

**Other Embodiments:****Medium 2/3-Phenyl Surfactant Mixtures**

The present invention also encompasses modified alkylbenzene sulfonate surfactant mixtures which are more particularly termed "medium 2/3-phenyl surfactant mixtures". Such mixtures are not the most preferred offered by the invention, but can be very economical.

Thus the invention includes a medium 2/3-phenyl surfactant mixture consisting essentially of: from 1% (preferably at least about 5%, more preferably at least about 10 %) to about 60% (in one mode preferably less than about 50%, more preferably less than about 40 %), by weight of a first alkylbenzene sulfonate surfactant, wherein said first alkylbenzene sulfonate surfactant is a modified alkylbenzene sulfonate surfactant mixture according to the first embodiment; and from 40% (in one mode preferably at least about 50%, more preferably at least about 60 %) to about 99% (preferably less than about 95%,

more preferably less than about 90%), by weight of a second alkylbenzene sulfonate surfactant, wherein said second alkylbenzene sulfonate surfactant is an alkylbenzene sulfonate surfactant mixture other than said modified alkylbenzene sulfonate surfactant mixture according to the first embodiment, and wherein said second alkylbenzene sulfonate surfactant has a 2/3-phenyl index of from about 75 to about 160 (typically said second alkylbenzene sulfonate surfactant is a commercial C<sub>10</sub>-C<sub>14</sub> linear alkylbenzene sulfonate surfactant, e.g., DETAL ® process LAS or HF process LAS though in general any commercial linear (LAS) or branched (ABS, TPBS) type can be used); provided that said medium 2/3-phenyl surfactant mixture has a 2/3-phenyl index of from about 160 to about 275 (preferably from about 170 to about 265, more preferably from about 180 to about 255). (of course it is equally possible within the spirit and scope of the invention to prepare any blend of the modified alkylbenzene sulfonate surfactant mixture of the invention with any known commercial linear or branched alkylbenzene sulfonate surfactant.

Also included is a detergent composition comprising (preferably consisting essentially of): (a) from about 0.1% to about 95%, by weight (preferably from about 0.5% to about 50%, more preferably from about 1% to about 35%) of medium 2/3-phenyl surfactant mixture as defined supra; (b) from about 0.00001% to about 99.9% (preferably from about 5% to about 98%, more preferably from about 50% to about 95%) of conventional cleaning adjuncts other than surfactants; and (c) from 0% to about 50%, by weight (in some preferred embodiments, 0%, and in others preferably from about 0.1% to about 30%, more typically from about 0.2% to about 10%), of a surfactant other than said medium 2/3-phenyl surfactant mixture; provided that when said detergent composition comprises any other alkylbenzene sulfonate than the alkylbenzene sulfonate of said medium 2/3-phenyl surfactant mixture, said medium 2/3-phenyl surfactant mixture and said other alkylbenzene sulfonate, as a mixture, have an overall 2/3-phenyl index of from about 160 to about 275 (preferably from about 170 to about 265, more preferably from about 180 to about 255).

Likewise part of the invention is a detergent composition comprising:

(a) from about 0.1% to about 95%, by weight of medium 2/3-phenyl surfactant mixture as defined supra; (b) from about 0.00001% to about 99.9% of conventional cleaning adjuncts

other than surfactants; and (c) from 0.1% to about 50%, by weight of surfactants other than alkylbenzene sulfonates (preferably, one or more surfactants selected from the group consisting of cationic surfactants, anionic surfactants, and anionic surfactants other than alkylbenzene sulfonates, more preferably wherein a cationic surfactant is present at a level of from about 0.2% to about 5%); provided that when said detergent composition comprises any other alkylbenzene sulfonate than the alkylbenzene sulfonate of said medium 2/3-phenyl surfactant mixture, said medium 2/3-phenyl surfactant mixture and said other alkylbenzene sulfonate, as a mixture, have an overall 2/3-phenyl index of from about 160 to about 275.

Moreover there is included herein a detergent composition consisting essentially of: (a) from about 1% to about 50%, by weight of medium 2/3-phenyl surfactant mixture as defined supra; (b) from about 0.1% to about 98.8% of conventional cleaning adjuncts other than surfactants; (c) from 0.1% to about 50%, by weight of surfactants other than alkylbenzene sulfonates (preferably, one or more surfactants selected from the group consisting of cationic surfactants, anionic surfactants, and anionic surfactants other than alkylbenzene sulfonates, more preferably wherein a cationic surfactant is present at a level of from about 0.2% to about 5%); and (d) from about 0.1% to about 98.8% water.

In additional embodiments of the medium 2/3-phenyl type, there is included a detergent composition consisting essentially of: (a) from about 0.1% to about 95%, preferably from 1% to about 50% by weight of medium 2/3-phenyl surfactant mixture as defined supra; and (b) from about 0.00001% to about 99.9% of conventional cleaning adjuncts other than surfactants.

Processes for preparing a medium 2/3-phenyl surfactant mixture include those comprising a step selected from: (i) blending said first alkylbenzene sulfonate surfactant and said second alkylbenzene sulfonate surfactant; and (ii) blending the nonsulfonated precursor of said first alkylbenzene sulfonate surfactant and the nonsulfonated precursor of said second alkylbenzene sulfonate surfactant and sulfonating said blend.

#### Preparative Examples

##### Example 1

Mixture of 4-methyl-4-nonanol, 5-methyl-5-decanol,  
6-methyl-6-undecanol and 6-methyl-6-dodecanol

(A starting-material for branched olefins)

A mixture of 4.65 g of 2-pentanone, 20.7 g of 2-hexanone, 51.0 g of 2-heptanone, 36.7 g of 2-octanone and 72.6 g of diethyl ether is added to an addition funnel. The ketone mixture is then added dropwise over a period of 2.25 hours to a nitrogen blanketed stirred three neck 2 L round bottom flask, fitted with a reflux condenser and containing 600 mL of 2.0 M n-pentylmagnesium bromide in diethyl ether and an additional 400 mL of diethyl ether. After the addition is complete the reaction mixture is stirred an additional 2.5 hours at 20°C. The reaction mixture is then added to 1kg of cracked ice with stirring. To this mixture is added 393.3 g of 30% sulphuric acid solution. The aqueous acid layer is drained and the remaining ether layer is washed twice with 750 mL of water. The ether layer is then evaporated under vacuum to yield 176.1 g of a mixture of 4-methyl-4-nonanol, 5-methyl-5-decanol, 6-methyl-6-undecanol and 6-methyl-6-dodecanol.

Example 2

**Substantially Mono Methyl Branched Olefin Mixture**

**With Randomized Branching**

(A branched olefin mixture which is an alkylating agent for preparing modified alkylbenzenes in accordance with the invention)

a) A 174.9 g sample of the mono methyl branched alcohol mixture of Example 1 is added to a nitrogen blanketed stirred three neck round bottom 500 mL flask, fitted with a Dean Stark trap and a reflux condenser along with 35.8 g of a shape selective zeolite catalyst (acidic mordenite catalyst Zeocat™ FM-8/25H). With mixing, the mixture is then heated to about 110-155°C and water and some olefin is collected over a period of 4-5 hours in the Dean Stark trap. The conversion of the alcohol mixture of example 1 to a substantially non-randomized methyl branched olefin mixture is now complete. The substantially non-randomized methyl branched olefin mixture remaining in the flask along with the substantially non-randomized methyl branched olefin mixture collected in the dean stark trap is recombined and filtered to remove catalyst. The solid filter cake is washed twice with 100 mL portions of hexane. The hexane filtrate is evaporated under vacuum and the resulting product is combined with the first filtrate to give 148.2 g of a substantially non-randomized methyl branched olefin mixture.

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

b) The olefin mixture of Example 2a is combined with 36g of a shape selective zeolite catalyst (acidic mordenite catalyst Zeocat™ FM-8/25H) and reacted according to example 2a with the following changes. The reaction temperature is raised to 190-200°C for a period of about 1-2 hours to randomize the specific branch positions in the olefin mixture. The substantially mono methyl branched olefin mixture with randomized branching remaining in the flask along with the substantially mono methyl branched olefin mixture with randomized branching collected in the dean stark trap are recombined and filtered to remove catalyst. The solid filter cake is washed twice with 100 mL portions of hexane. The hexane filtrate is evaporated under vacuum and the resulting product is combined with the first filtrate to give 147.5 g of a substantially mono methyl branched olefin mixture with randomized branching.

### **EXAMPLE 3**

#### **Substantially Mono Methyl Branched Alkylbenzene Mixture**

**With a 2/3-Phenyl Index of about 550 and a 2-Methyl-2-Phenyl Index of about 0.02**

**(A modified alkylbenzene mixture in accordance with the invention)**

147 g of the substantially mono methyl branched olefin mixture of example 2 and 36 g of a shape selective zeolite catalyst (acidic mordenite catalyst Zeocat™ FM-8/25H) are added to a 2 gallon stainless steel, stirred autoclave. Residual olefin and catalyst in the container are washed into the autoclave with 300 mL of n-hexane and the autoclave is sealed. From outside the autoclave cell, 2000 g of benzene (contained in a isolated vessel and added by way of an isolated pumping system inside the isolated autoclave cell) is added to the autoclave. The autoclave is purged twice with 250 psig N<sub>2</sub>, and then charged to 60 psig N<sub>2</sub>. The mixture is stirred and heated to about 200°C for about 4-5 hours. The autoclave is cooled to about 20°C overnight. The valve is opened leading from the autoclave to the benzene condenser and collection tank. The autoclave is heated to about 120°C with continuous collection of benzene. No more benzene is collected by the time the reactor reaches 120°C. The reactor is then cooled to 40°C and 750 g of n-hexane is pumped into the autoclave with mixing. The autoclave is then drained to remove the reaction mixture. The reaction mixture is filtered to remove catalyst and the n-hexane is removed under vacuum. The product is distilled under vacuum (1-5 mm of Hg). The substantially mono methyl branched alkylbenzene mixture with a 2/3-Phenyl index of



about 550 and a 2-methyl-2-phenyl index of about 0.02 is collected from 76°C - 130°C (167 g).

#### **EXAMPLE 4**

##### **Substantially Mono Methyl Branched Alkylbenzenesulfonic Acid Mixture**

with a 2/3-Phenyl Index of about 550 and a 2-Methyl-2-Phenyl Index of about 0.02

(A modified alkylbenzene sulfonic acid mixture in accordance with the invention)

The product of example 3 is sulfonated with a molar equivalent of chlorosulfonic acid using methylene chloride as solvent. The methylene chloride is removed to give 210 g of a substantially mono methyl branched alkylbenzenesulfonic acid mixture with a 2/3-Phenyl index of about 550 and a 2-methyl-2-phenyl index of about 0.02

#### **EXAMPLE 5**

##### **Substantially Mono Methyl Branched Alkylbenzene sulfonate, Sodium Salt**

Mixture with a 2/3-Phenyl index of about 550

(A modified alkylbenzene sulfonate surfactant mixture in accordance with the invention)

The product of example 4 is neutralized with a molar equivalent of sodium methoxide in methanol and the methanol is evaporated to give 225 g of a substantially mono methyl branched alkylbenzene sulfonate, sodium salt mixture with a 2/3-Phenyl index of about 550 and a 2-methyl-2-phenyl index of about 0.02.

#### **EXAMPLE 6**

##### **Substantially Linear Alkylbenzene Mixture**

With a 2/3-Phenyl Index of About 550 and a 2-Methyl-2-Phenyl Index of about 0.02

(An alkylbenzene mixture to be used as a component of modified alkylbenzenes)

A mixture of chain lengths of substantially linear alkylbenzenes with a 2/3-Phenyl index of about 550 and a 2-methyl-2-phenyl index of about 0.02 is prepared using a shape zeolite catalyst (acidic mordenite catalyst Zeocat™ FM-8/25H). A mixture of 15.1 g of Neodene (R)10, 136.6 g of Neodene(R)1112, 89.5 g of Neodene(R)12 and 109.1 g of 1-tridecene is added to a 2 gallon stainless steel, stirred autoclave along with 70 g of a shape selective catalyst (acidic mordenite catalyst Zeocat™ FM-8/25H). Neodene is a trade name for olefins from Shell Chemical Company. Residual olefin and catalyst in the container are washed into the autoclave with 200 mL of n-hexane and the autoclave is

5 sealed. From outside the autoclave cell, 2500 benzene (contained in a isolated vessel and  
added by way of an isolated pumping system inside the isolated autoclave cell) is added to  
10 the autoclave. The autoclave is purged twice with 250 psig N<sub>2</sub>, and then charged to 60  
psig N<sub>2</sub>. The mixture is stirred and heated to about 200-205°C for about 4-5 hours then  
5 cooled to 70-80°C. The valve is opened leading from the autoclave to the benzene  
condenser and collection tank. The autoclave is heated to about 120°C with continuous  
15 collection of benzene in collection tank. No more benzene is collected by the time the  
reactor reaches 120°C. The reactor is then cooled to 40°C and 1 kg of n-hexane is  
pumped into the autoclave with mixing. The autoclave is then drained to remove the  
20 reaction mixture. The reaction mixture is filtered to remove catalyst and the n-hexane is  
evaporated under low vacuum. The product is then distilled under high vacuum (1-5 mm  
of Hg). The substantially linear alkylbenzene mixture with a 2/3-Phenyl index of about  
25 550 and a 2-methyl-2-phenyl index of about 0.02 is collected from 85°C - 150°C (426.2  
g).

#### 15 EXAMPLE 7

##### Substantially Linear Alkylbenzenesulfonic Acid Mixture

30 With a 2/3-Phenyl Index of About 550 and a 2-Methyl-2-Phenyl Index of About 0.02

(An alkylbenzene sulfonic acid mixture to be used as a component of modified  
alkylbenzene sulfonic acid mixtures in accordance with the invention)

35 20 422.45 g of the product of example 6 is sulfonated with a molar equivalent of  
chlorosulfonic acid using methylene chloride as solvent. The methylene chloride is  
removed to give 574 g of a substantially linear alkylbenzenesulfonic acid mixture with a  
2/3-Phenyl index of about 550 and a 2-methyl-2-phenyl index of about 0.02.

#### 40 EXAMPLE 8

##### 25 Substantially Linear Alkylbenzene sulfonate, Sodium Salt Mixture

45 With a 2/3-Phenyl Index of About 550 and a 2-Methyl-2-Phenyl Index of About  
0.02.

(An alkylbenzene sulfonate surfactant mixture to be used as a component of  
modified alkylbenzene sulfonate surfactant mixtures in accordance with the  
30 invention)

The substantially linear alkylbenzenesulfonic acid mixture of example 7 is neutralized with a molar equivalent of sodium methoxide in methanol and the methanol is evaporated to give 613 g of the substantially linear alkylbenzene sulfonate, sodium-salt mixture with a 2/3-Phenyl index of about 550 and a 2-methyl-2-phenyl index of about 0.02.

#### **EXAMPLE 9**

##### **6,10-Dimethyl-2-undecanol**

**(A starting-material for branched olefins)**

To a glass autoclave liner is added 299 g of geranylacetone, 3.8 g of 5% ruthenium carbon and 150 ml of methanol. The glass liner is sealed inside a 3 L, stainless steel, rocking autoclave and the autoclave purged once with 250 psig N<sub>2</sub>, once with 250 psig H<sub>2</sub> and then charged with 1000 psig H<sub>2</sub>. With mixing, the reaction mixture is heated. At about 75°C, the reaction initiates and begins consuming H<sub>2</sub> and exotherms to 170-180°C. In 10-15 minutes, the temperature has dropped to 100-110°C and the pressure dropped to 500 psig. The autoclave is boosted to 1000 psig with H<sub>2</sub> and mixed at 100-110°C for an additional 1 hour and 40 minutes with the reaction consuming an additional 160 psig H<sub>2</sub> but at which time no more H<sub>2</sub> consumption is observed. Upon cooling the autoclave to 40°C, the reaction mixture removed, filtered to remove catalyst and concentrated by evaporation of methanol under vacuum to yield 297.75 g of 6,10-dimethyl-2-undecanol.

#### **EXAMPLE 10**

##### **5,7-Dimethyl-2-decanol**

**(A starting-material for branched olefins)**

To a glass autoclave liner is added 249 g of 5,7-dimethyl-3,5,9-decatrien-2-one, 2.2 g of 5% ruthenium carbon and 200 ml of methanol. The glass liner is sealed inside a 3 L, stainless steel, rocking autoclave and the autoclave purged once with 250 psig N<sub>2</sub>, once with 250 psig H<sub>2</sub> and then charged with 500 psig H<sub>2</sub>. With mixing, the reaction mixture is heated. At about 75°C, the reaction initiates and begins consuming H<sub>2</sub> and exotherms to 170°C. In 10 minutes, the temperature has dropped to 115-120°C and the pressure dropped to 270 psig. The autoclave is boosted to 1000 psig with H<sub>2</sub>, mixed at 110-115°C for an additional 7 hours and 15 minutes then cooled to 30°C. The reaction mixture is removed from autoclave, filtered to remove catalyst and concentrated by evaporation of methanol under vacuum to yield 225.8 g of 5,7-dimethyl-2-decanol.

**EXAMPLE 11****4,8-Dimethyl-2-nonanol****(A starting-material for branched olefins)**

A mixture of 671.2 g of citral and 185.6 g of diethyl ether is added to an addition funnel. The citral mixture is then added dropwise over a five hour period to a nitrogen blanketed, stirred, 5 L, 3-neck, round bottom flask equipped with a reflux condenser containing 1.6 L of 3.0 M methylmagnesium bromide solution and an additional 740 ml of diethyl ether. The reaction flask is situated in an ice water bath to control exotherm and subsequent ether reflux. After addition is complete, the ice water bath is removed and the reaction allowed to mix for an additional 2 hours at 20-25°C at which point the reaction mixture is added to 3.5 Kg of cracked ice with good mixing. To this mixture is added 1570 g of 30% sulfuric acid solution. The aqueous acid layer is drained and the remaining ether layer washed twice with 2 L of water. The ether layer is concentrated by evaporation of the ether under vacuum to yield 720.6 g of 4,8-dimethyl-3,7-nonadien-2-ol. To a glass autoclave liner is added 249.8 g of the 4,8-dimethyl-3,7-nonadien-2-ol, 5.8 g of 5% palladium on activated carbon and 200 ml of n-hexane. The glass liner is sealed inside a 3 L, stainless steel, rocking autoclave and the autoclave purged twice with 250 psig N<sub>2</sub>, once with 250 psig H<sub>2</sub> and then charged with 100 psig H<sub>2</sub>. Upon mixing, the reaction initiates and begins consuming H<sub>2</sub> and exotherms to 75°C. The autoclave is heated to 80°C, boosted to 500 psig with H<sub>2</sub>, mixed for 3 hours and then cooled to 30°C. The reaction mixture is removed from autoclave, filtered to remove catalyst and concentrated by evaporation of n-hexane under vacuum to yield 242 g of 4,8-dimethyl-2-nonanol.

**EXAMPLE 12****Substantially Dimethyl Branched Olefin Mixture With Randomized Branching**

**(A branched olefin mixture which is an alkylating agent for preparing modified alkylbenzenes in accordance with the invention)**

To a nitrogen blanketed, 2 L, 3-neck round bottom flask equipped with thermometer, mechanical stirrer and a Dean-Stark trap with reflux condenser is added 225 g of 4,8-dimethyl-2-nonanol (example 11), 450 g of 5,7-dimethyl-2-decanol (example 10), 225 g of 6,10-dimethyl-2-undecanol (example 9) and 180 g of a shape selective zeolite catalyst (acidic mordenite catalyst Zeocat<sup>TM</sup> FM-8/25H). With mixing, the mixture is heated

(135-160°C) to the point water and some olefin is driven off and collected in Dean-Stark trap at a moderate rate. After a few hours, the rate of water collection slows and the temperature rises to 180-195°C where the reaction is allowed to mix for an additional 2-4 hours.

- 5 The dimethyl branched olefin mixture remaining in the flask along with the dimethyl branched olefin mixture that distilled over are recombined and filtered to remove the catalyst. The catalyst filter cake is slurried with 500 ml of hexane and vacuum filtered. The catalyst filter cake is washed twice with 100 ml of hexane and the filtrate concentrated by evaporation of the hexane under vacuum. The resulting product is combined with the first filtrate to give 820 g of dimethyl branched olefin mixture with randomized branching.

### **EXAMPLE 13**

#### **Substantially Dimethyl Branched Alkylbenzene Mixture With Randomized Branching and**

15 **2/3-Phenyl Index of About 600 and 2-Methyl-2-Phenyl Index of About 0.04**

(A modified alkylbenzene mixture in accordance with the invention)

- 30 820 g of the dimethyl branched olefin mixture of example 12 and 160 g of a shape selective zeolite catalyst (acidic mordenite catalyst Zeocat™ FM-8/25H) is added to a 2 gallon stainless steel, stirred autoclave and the autoclave is sealed. The autoclave is purged twice with 80 psig N<sub>2</sub> and then charged to 60 psig N<sub>2</sub>. From outside the autoclave cell, 3000 g of benzene (contained in a isolated vessel and added by way of an isolated pumping system inside the isolated autoclave cell) is added to the autoclave. The mixture is stirred and heated to 205°C to about 210°C. The reaction is continued for about 10 minutes at which time the product mixture is sampled. The 10 minute sample is filtered to remove catalyst and vacuum pulled on the mixture to remove any residual traces of benzene. The sample is distilled under vacuum (1-5 mm of Hg). The dimethyl branched alkylbenzene mixture with randomized branching and 2/3-Phenyl index of about 600 and a 2-methyl-2-phenyl index of about 0.26 is collected from 90°C - 140°C. The reaction is continued at 205°C to about 210°C for about 8 hours. The autoclave is cooled to about 30°C overnight. The valve is opened leading from the autoclave to the benzene condenser and collection tank. The autoclave is heated to about 120°C with continuous collection of

benzene. No more benzene is collected by the time the reactor reaches 120°C and the reactor is then cooled to 40°C. The autoclave is then drained to remove the reaction mixture. The reaction mixture is filtered to remove catalyst and vacuum pulled on the mixture to remove any residual traces of benzene. The product is distilled under vacuum (1-5 mm of Hg). The dimethyl branched alkylbenzene mixture with randomized branching and 2/3-Phenyl index of about 600 and a 2-methyl-2-phenyl index of about 0.04 is collected from 90°C - 140°C.

#### **EXAMPLE 14**

**Substantially Dimethyl Branched Alkylbenzenesulfonic Acid Mixture  
With Randomized Branching and a 2/3-Phenyl Index of about 600 and a 2-Methyl-  
2-Phenyl Index of About 0.04**

(A modified alkylbenzene sulfonic acid mixture in accordance with the invention). The dimethyl branched alkylbenzene product of example 13 is sulfonated with a molar equivalent of chlorosulfonic acid using methylene chloride as solvent with HCl evolved as a side product. The resulting sulfonic acid product is concentrated by evaporation of methylene chloride under vacuum. The substantially dimethyl branched alkylbenzenesulfonic acid mixture has a 2/3 Phenyl Index of about 2/3-Phenyl index of about 600 and a 2-methyl-2-phenyl index of about 0.04.

#### **EXAMPLE 15**

**Substantially Dimethyl Branched Alkylbenzenesulfonic Acid, Sodium Salt Mixture  
with Randomized Branching and 2/3-Phenyl Index of about 600 and a 2-Methyl-2-  
Phenyl Index of About 0.04**

(A modified alkylbenzene sulfonate surfactant mixture in accordance with the invention)

The dimethyl branched alkylbenzenesulfonic acid mixture of example 14 is neutralized with a molar equivalent of sodium methoxide in methanol and the methanol is evaporated to give solid dimethyl branched alkylbenzene sulfonate, sodium salt mixture with randomized branching and a 2/3-Phenyl index of about 600 and a 2-methyl-2-phenyl index of about 0.04.

#### **EXAMPLE 16**

**Modified alkylbenzene sulfonate surfactant mixtures according to the invention**  
**(Medium 2/3-phenyl type)**

Blends are prepared of:

- I) Modified alkylbenzene sulfonate surfactant mixture in accordance with the invention having a 2/3-Phenyl index of about 550 (according to Example 5)
- II) Commercial C<sub>11.7</sub> (average) linear alkylbenzene sulfonate surfactant (HF type) sodium salt having a 2/3-Phenyl index of about 100

In the table below, percentages are by weight:

	A	B	C
I	25%	15%	38%
II	75%	85%	62%

- Each of the above blends has a 2/3-phenyl index in the range from about 160 to about 275.

**EXAMPLE 17**

**Modified alkylbenzene sulfonate surfactant mixtures according to the invention**  
**(Medium 2/3-phenyl type)**

Blends are prepared of:

- I) Modified alkylbenzene sulfonate surfactant mixture in accordance with the invention having a 2/3-Phenyl index of about 550 (according to Example 5)
- II) Commercial C<sub>11.7</sub> (average) linear alkylbenzene sulfonate surfactant (DETAL ® type) sodium salt having a 2/3-Phenyl index of about 150

In the table below, percentages are by weight:

	A	B	C
I	25%	15%	10%
II	75%	85%	90%

Each of the above blends has a 2/3-phenyl index in the range from about 160 to about 275.

**EXAMPLE 18**

**Modified alkylbenzene sulfonic acid mixtures according to the invention**

**(Medium 2/3-phenyl type)**

Blends are prepared of:

- I) Modified alkylbenzene sulfonic acid surfactant mixture in accordance with the invention having a 2/3-Phenyl index of about 550 (according to Example 4)
- II) Commercial C<sub>11.7</sub> (average) linear alkylbenzene sulfonic acid (HF type) having a 2/3-Phenyl index of about 100.

In the table below, percentages are by weight:

	A	B	C
I	25%	15%	38%
II	75%	85%	62%

Each of the above blends has a 2/3-phenyl index in the range from about 160 to about 275.

**EXAMPLE 19****Modified alkylbenzene sulfonic acid mixtures according to the invention****(Medium 2/3-phenyl type)**

Blends are prepared of:

- I) Modified alkylbenzene sulfonic acid mixture in accordance with the invention having a 2/3-Phenyl index of about 550 (according to Example 4)
- II) Commercial C<sub>11.7</sub> (average) linear alkylbenzene sulfonic acid (DETAL ® type) having a 2/3-Phenyl index of about 150.

In the table below, percentages are by weight:

	A	B	C
I	25%	15%	10%
II	75%	85%	90%

Each of the above blends has a 2/3-phenyl index in the range from about 160 to about 275.

**EXAMPLE 20****Modified alkylbenzene mixtures according to the invention**



5

**(Medium 2/3-phenyl type)**

Blends are prepared of:

10

I) Modified alkylbenzene mixture in accordance with the invention having a 2/3-Phenyl index of about 550 (according to Example 3)

5 II) Commercial C<sub>11.7</sub> (average) linear alkylbenzene (HF type) having a 2/3-Phenyl index of about 100.

15

In the table below, percentages are by weight:

	A	B	C
20 I	25%	15%	38%
II	75%	85%	62%

Each of the above blends has a 2/3-phenyl index in the range from about 160 to about

25

10 275.

**EXAMPLE 21****Modified alkylbenzene mixtures according to the invention****(Medium 2/3-phenyl type)**

30

Blends are prepared of:

15 I) Modified alkylbenzene mixture in accordance with the invention having a 2/3-Phenyl index of about 550 (according to Example 3)

35

II) Commercial C<sub>11.7</sub> (average) linear alkylbenzene (DETAL ® type) having a 2/3-Phenyl index of about 150.

In the table below, percentages are by weight:

20

40

	A	B	C
I	25%	15%	10%
II	75%	85%	90%

45

Each of the above blends has a 2/3-phenyl index in the range from about 160 to about 275.

**EXAMPLE 22**

50

**Modified Alkylbenzene Mixture according to the invention**

55

5 With a 2/3-Phenyl Index of about 550 and a 2-Methyl-2-Phenyl Index of about 0.02  
110.25 g of the substantially mono methyl branched olefin mixture of example 2, 36.75 g  
10 a nonbranched olefin mixture (decene : undecene : dodecene : tridecene ratio of 2 : 9 : 20  
: 18) and 36 g of a shape selective zeolite catalyst (acidic mordenite catalyst Zeocat™  
5 FM-8/25H) are added to a 2 gallon stainless steel, stirred autoclave. Residual olefin and  
catalyst in the container are washed into the autoclave with 300 mL of n-hexane and the  
15 autoclave is sealed. From outside the autoclave cell, 2000 g of benzene (contained in a  
isolated vessel and added by way of an isolated pumping system inside the isolated  
autoclave cell) is added to the autoclave. The autoclave is purged twice with 250 psig N<sub>2</sub>,  
20 and then charged to 60 psig N<sub>2</sub>. The mixture is stirred and heated to about 200°C for  
about 4-5 hours. The autoclave is cooled to about 20°C overnight. The valve is opened  
leading from the autoclave to the benzene condenser and collection tank. The autoclave is  
25 heated to about 120°C with continuous collection of benzene. No more benzene is  
collected by the time the reactor reaches 120°C. The reactor is then cooled to 40°C and  
15 750 g of n-hexane is pumped into the autoclave with mixing. The autoclave is then  
drained to remove the reaction mixture. The reaction mixture is filtered to remove  
catalyst and the n-hexane is removed under vacuum. The product is distilled under  
30 vacuum (1-5 mm of Hg). A modified alkylbenzene mixture with a 2/3-Phenyl index of  
about 550 and a 2-methyl-2-phenyl index of about 0.02 is collected from 76°C - 130°C  
35 (167 g).

#### EXAMPLE 23

##### **Modified Alkylbenzenesulfonic Acid Mixture according to the invention (Branched and Nonbranched Alkylbenzenesulfonic Acid Mixture)**

40 with a 2/3-Phenyl Index of about 550 and a 2-Methyl-2-Phenyl Index of about 0.02  
25 The modified alkylbenzene mixture of example 22 is sulfonated with a molar equivalent  
of chlorosulfonic acid using methylene chloride as solvent. The methylene chloride is  
45 removed to give 210 g of a modified alkylbenzenesulfonic acid mixture with a 2/3-Phenyl  
index of about 550 and a 2-methyl-2-phenyl index of about 0.02.

#### EXAMPLE 24

50 30 **Modified Alkylbenzenesulfonate, Sodium Salt Mixture According to the invention  
(Branched and Nonbranched Alkylbenzenesulfonate, Sodium Salt Mixture)**

with a 2/3-Phenyl Index of about 550 and a 2-Methyl-2-Phenyl Index of about 0.02. The modified alkylbenzenesulfonic acid of example 23 is neutralized with a molar equivalent of sodium methoxide in methanol and the methanol is evaporated to give 225 g of a modified alkylbenzenesulfonate, sodium salt mixture with a 2/3-Phenyl index of about 550 and a 2-methyl-2-phenyl index of about 0.02.

**Methods for Determining Compositional Parameters (2/3-phenyl index, 2-methyl-2-phenyl index) of Mixed Alkylbenzene/ Alkylbenzenesulfonate/ Alkylbenzenesulfonic Acid Systems.**

It is well known in the art to determine compositional parameters of conventional linear alkylbenzenes and/or highly branched alkylbenzenesulfonates (TPBS, ABS). See, for example Surfactant Science Series, Volume 40, Chapter 7 and Surfactant Science Series, Volume 73, Chapter 7. Typically this is done by GC and/or GC-mass spectroscopy for the alkylbenzenes and HPLC for the alkylbenzenesulfonates or sulfonic acids;  $^{13}\text{C}$  nmr is also commonly used. Another common practice is desulfonation. This permits GC and/or GC-mass spectroscopy to be used, since desulfonation converts the sulfonates or sulfonic acids to the alkylbenzenes which are tractable by such methods.

In general, the present invention provides unique and relatively complex mixtures of alkylbenzenes, and similarly complex surfactant mixtures of alkylbenzenesulfonates and/or alkylbenzenesulfonic acids. Compositional parameters of such compositions can be determined using variations and combinations of the art-known methods.

The sequence of methods to be used depends on the composition to be characterized as follows:

Composition to be characterized	Sequence of Methods (Methods separated by commas are run in sequence, others can be run in parallel)
Alkylbenzene mixtures	GC, NMR1 NMR 2
Alkylbenzene mixtures	GC, DIS, GC, NMR1 NMR 2

with impurities*	
Alkylbenzenesulfonic acid mixtures	Option 1: HPLC, NMR3 NMR 4 Option 2: HPLC, DE, NMR1 NMR 2
Alkylbenzenesulfonate salt mixtures	Option 1: HPLC, AC, NMR3 NMR 4 Option 2: HPLC, DE, NMR1 NMR 2
Alkylbenzenesulfonic acid mixtures with impurities*	Option 1: HPLC, HPLC-P, HPLC, NMR3 NMR 4 Option 2: HPLC, DE, DIS, GC, NMR1 NMR 2
Alkylbenzenesulfonate salt mixtures with impurities*	Option 1: HPLC, HPLC-P, HPLC, AC, NMR3 NMR 4 Option 2: HPLC, DE, DIS, GC, NMR1 NMR 2

\* Typically preferred when the material contains more than about 10% impurities such as dialkylbenzenes, olefins, paraffins, hydrotropes, dialkylbenzenesulfonates, etc.

### GC

#### 5 Equipment:

- Hewlett Packard Gas Chromatograph HP5890 Series II equipped with a split/splitless injector and FID
- J&W Scientific capillary column DB-1HT, 30 meter, 0.25mm id, 0.1um film thickness cat# 1221131
- 10 • Restek Red lite Septa 11mm cat# 22306
- Restek 4mm Gooseneck inlet sleeve with a carbofrit cat# 20799-209.5
- O-ring for inlet liner Hewlett Packard cat# 5180-4182
- J.T.Baker HPLC grade Methylene Chloride cat# 9315-33, or equivalent
- 2ml GC autosampler vials with crimp tops, or equivalent

#### 15 Sample Preparation:

- Weigh 4-5 mg of sample into a 2 ml GC autosampler vial
- Add 1 ml J.T. Baker HPLC grade Methylene Chloride, cat# 9315-33 to the GC vial, seal with 11mm crimp vial teflon lined closures (caps), part # HP5181-1210 using crimper tool, part # HP8710-0979 and mix well

- The sample is now ready for injection into the GC

**GC Parameters:**

Carrier Gas: Hydrogen

Column Head Pressure: 9 psi

Flows: Column Flow @ 1 ml/min.

Split Vent @ ~3ml/min.

Septum Purge @ 1 ml/min.

Injection: HP 7673 Autosampler, 10 ul syringe, 1ul injection

Injector Temperature: 350 °C

Detector Temperature: 400 °C

Oven Temperature Program: initial 70 °C hold 1 min.

rate 1 °C/min.

final 180 °C hold 10 min.

Standards required for this method are 2-phenyloctane and 2-phenylpentadecane, each freshly distilled to a purity of greater than 98%. Run both standards using the conditions specified above to define the retention time for each standard. This defines a retention time range which is the retention time range to be used for characterizing any alkylbenzenes or alkylbenzene mixtures in the context of this invention (e.g., test samples). Now run the test samples for which compositional parameters are to be determined. Test samples pass the GC test provided that greater than 90% of the total GC area percent is within the retention time range defined by the two standards. Test samples that pass the GC test can be used directly in the NMR1 and NMR2 test methods. Test samples that do not pass the GC test must be further purified by distillation until the test sample passes the GC test.

**DESULFONATION (DE)**

The desulfonation method is a standard method described in "The Analysis of Detergents and Detergent Products" by G. F. Longman on pages 197-199. Two other useful descriptions of this standard method are given on page 230-231 of volume 40 of the Surfactant Science Series edited by T. M. Schmitt: "Analysis of Surfactants" and on page 272 of volume 73 of the Surfactant Science Series: "Anionic Surfactants" edited by John

5 Cross. This is an alternative method to the HPLC method, described herein, for evaluation  
of the branched and nonbranched alkylbenzenesulfonic acid and/or salt mixtures  
10 (Modified Alkylbenzenesulfonic acid and or salt Mixtures). The method provides a means  
of converting the sulfonic acid and/or salt mixture into branched and nonbranched  
5 alkylbenzene mixtures which can then be analyzed by means of the GC and NMR  
methods NMR1 and NMR2 described herein.

### HPLC

- 20 10 See L.R. Snyder and J.J. Kirkland, "Introduction to Modern Liquid Chromatography",  
2nd. Ed., Wiley, NY, 1979.

#### Apparatus

##### Suitable HPLC System

Waters Division of Millipore or equivalent.

HPLC pump with He sparge and Waters, model 600 or equivalent  
temperature control

Autosampler/injector Waters 717, or equivalent

Autosampler 48 position tray Waters or equivalent

UV detector Waters PDA 996 or equivalent

Fluorescence detector Waters 740 or equivalent

Data System/Integrator Waters 860 or equivalent

Autosampler vials and caps 4 mL capacity, Millipore #78514 and  
#78515.

HPLC Column, X2 Supelcosil LC18, 5  $\mu$ m, 4.6 mm x 25 cm,  
Supelcosil #58298

Column Inlet Filter Rheodyne 0.5 $\mu$ m x 3 mm  
Rheodyne #7335

LC eluent membrane filters Millipore SJHV M47 10, disposable filter  
funnel with 0.45  $\mu$ m membrane.

Balance Sartorius or equivalent; precision  $\pm 0.0001$ g.

Vacuum Sample Clarification Kit with pumps and  
filters, Waters #WAT085113.

Reagents

C8 LAS standard material

Sodium-p-2-octylbenzene sulfonate.

C15 LAS standard material

Sodium-p-2-pentadecylbenzene sulfonate.

ProcedureA. Preparation of HPLC mobile Phase

## 1. Mobile phase A

a) Weigh 11.690 g sodium chloride and transfer to a 2000 mL volumetric flask. Dissolve in 200 mL HPLC grade water.

b) Add 800 mL of acetonitrile and mix. Dilute to volume after solution comes to room temperature. This prepares a solution of 100 mM NaCl/40% ACN.

c) Filter through an LC eluent membrane filter and degas prior to use.

## 2. Mobile phase B - Prepare 2000 mL of 60% acetonitrile in HPLC grade water. Filter through an LC eluent membrane filter and degas prior to use.

## B. C8 and C15 Internal Standard Solution

1. Weigh 0.050 g of a 2-phenyloctylbenzenesulfonate and 0.050g of 2-Phenylpentadecanesulfonate standards and quantitatively transfer to a 100 mL volumetric flask.

2. Dissolve with 30 mL ACN and dilute to volume with HPLC grade water. This prepares ca. 1500 ppm solution of the mixed standard.

## C. Sample Solutions

1. Wash Solutions - Transfer 250  $\mu$ L of the standard solution to a 1 mL autosampler vial and add 750  $\mu$ L of the wash solution. Cap and place in the autosampler tray.

2. Alkylbenzenesulfonic acid or Alkylbenzenesulfonate - Weigh 0.10 g of the alkylbenzenesulfonic acid or salt and quantitatively transfer to a 100 mL volumetric flask. Dissolve with 30 mL ACN and dilute to volume with HPLC grade water. Transfer 250  $\mu$ L of the standard solution to a 1 mL autosampler vial and add 750  $\mu$ L of the sample solution. Cap and place in the autosampler tray. If solution is excessively turbid, filter through 0.45

µm membrane before transferring to auto-sampler vial. Cap and place in the auto-sampler tray.

D: HPLC System

1. Prime HPLC pump with mobile phase. Install column and column inlet filter and equilibrate with eluent (0.3 mL/min for at least 1 hr.).

2. Run samples using the following HPLC conditions:

Mobile phase A 100 mM NaCl/40% ACN

Mobile phase B 40% H<sub>2</sub>O/60% ACN

time 0 min. 100% Mobile phase A 0% Mobile Phase B

time 75 min. 5% Mobile phase A 95% Mobile Phase B

time 98 min. 5% Mobile phase A 95% Mobile Phase B

time 110 min. 100% Mobile phase A 0% Mobile Phase B

time 120 min. 100% Mobile phase A 0% Mobile Phase B

Note: A gradient delay time of 5-10 minutes may be needed depending on dead volume of HPLC system.

Flow rate 1.2 mL/min.

Temperature 25°C

He sparge rate 50 mL/hr.

UV detector 225 nm

Fluorescence detector  $\lambda = 225 \text{ nm}$ ,  $\lambda = 295 \text{ nm}$  with sensitivity at 10 x.

Run time 120 min.

Injection volume 10 µL

Replicate injections 2

Data rate 0.45 MB/Hr.

Resolution 4.8nm

3. The column should be washed with 100% water followed by 100% acetonitrile and stored in 80/20 ACN/water.

The HPLC elution time of the 2-phenyloctylbenzenesulfonate defines the lower limit and the elution time of the 2-phenylpentadecanesulfonate standard defines the upper limit of the HPLC analysis relating to the alkylbenzenesulfonic acid/salt mixture of the



invention. If 90% of the alkylbenzenesulfonic acid/salt mixture components have retention times within the range of the above standards then the sample can be further defined by methods NMR 3 and NMR 4.

If the alkylbenzenesulfonic acid/salt mixture contains 10% or more of components outside the retention limits defined by the standards then the mixture should be further purified by method HPLC-P or by DE, DIS methods.

#### HPLC Preparative (HPLC-P)

Alkylbenzenesulfonic acids and/or the salts which contain substantial impurities (10% or greater) are purified by preparative HPLC. See L.R. Snyder and J.J. Kirkland, "Introduction to Modern Liquid Chromatography", 2nd. Ed., Wiley, NY, 1979. This is routine to one skilled in the art. A sufficient quantity should be purified to meet the requirements of the NMR 3 and NMR 4.

#### Preparative LC method using Mega Bond Elut Sep Pak® (HPLC-P)

Alkylbenzenesulfonic acids and/or the salts which contain substantial impurities (10% or greater) can also be purified by an LC method (also defined herein as HPLC-P).

This procedure is actually preferred over HPLC column prep purification.

As much as 500 mg of unpurified MLAS salts can be loaded onto a 10g(60ml) Mega Bond Elut Sep Pak® and with optimized chromatography the purified MLAS salt can be isolated and ready for freeze drying within 2 hours. A 100 mg sample of Modified alkylbenzenesulfonate salt can be loaded onto a 5g(20ml) Bond Elut Sep Pak and ready within the same amount of time.

#### A. Instrumentation

HPLC: Waters Model 600E gradient pump, Model 717 Autosampler, Water's Millennium PDA, Millennium Data Manager (v. 2.15)

Mega Bond Elut: C18 bonded phase, Varian 5g or 10g, PN:1225-6023, 1225-6031 with adaptors

HPLC Columns: Supelcosil LC-18 (X2), 250x4.6mm, 5mm; #58298

Analytical Balance: Mettler Model AE240, capable of weighing samples to  $\pm 0.01$ mg

#### B. Accessories

5

Volumetrics: glass, 10mL

Graduated Cylinder: 1L

10

HPLC Autosampler Vials: 4mL glass vials with Teflon caps and glass low volume inserts and pipette capable of accurately delivering 1, 2, and 5mL volumes

5 C. Reagents and Chemicals

15

Water (DI-H<sub>2</sub>O): Distilled, deionized water from a Millipore, Milli-Q system or equivalent

Acetonitrile (CH<sub>3</sub>CN): HPLC grade from Baker or equivalent Sodium Chloride Crystal Baker Analyzed or equivalent

20

10 D. HPLC Conditions

Aqueous Phase Preparation:

25

A: To 600mL of DI-H<sub>2</sub>O contained in a 1L graduated cylinder, add 5.845 of sodium chloride. Mix well and add 400 ml ACN. Mix well.

15

B: To 400ml of DI-H<sub>2</sub>O contained in a 1L graduated cylinder, add 600ml ACN and mix well.

30

Reservoir A: 60/40, H<sub>2</sub>O/CAN with salt and Reservoir B: 40/60, H<sub>2</sub>O/ACN

Run Conditions: Gradient: 100% A for 75 min. 5%A/ 95% B for 98 min. 5%A/95% B for 110min. 100%A for 125min.

35

20 Column Temperature Not Thermostatted (i.e., room temp.)

HPLC Flow Rate 1.2mL/min

Injection Volume 10mL

Run Time 125 minutes

40

UV Detection 225nm

25 Conc. >4mg/ml

SEP PAK EQUILIBRATION (BOND ELUT, 5G)

45

1. Pass 10 ml of a solution containing 25/75 H<sub>2</sub>O/ACN onto the sep pak by applying positive pressure with a 10 cc syringe at a rate of ~ 40 drops/min. Do not allow the sep pak to go dry.

50

55

5

2. Immediately pass 10ml (x3) of a solution containing 70/30 H<sub>2</sub>O/ACN in the same manner as #1. Do not allow the sep pak to go dry. Maintain a level of solution (~1mm) at the head of the sep pak.

10

3. The sep pak is now ready for sample loading. MLAS

#### 5 SAMPLE LOADING/ SEPARATION AND ISOLATION

15

4. Weigh <200 mg of sample into a 1 dram vial and add 2 ml of 70/30 H<sub>2</sub>O/ACN. Sonicate and mix well.

20

5. Load sample onto Bond Elut and with positive pressure from a 10 cc syringe begin separation. Rinse vial with 1 ml (x2) portions of the 70/30 solution and load onto sep

10

pak. Maintain ~1mm of solution at the head of the sep pak.

6. Pass 10 ml of 70/30 onto the Bond Elut with positive pressure from a 10 cc syringe at a rate of ~40 drops/min.

25

7. 4. Repeat this with 3 ml and 4 ml and collect effluent if interested in impurities.

#### MLAS ISOLATION AND COLLECTION

- 15 1. Pass 10 ml of solution containing 25/75 H<sub>2</sub>O/ACN with positive pressure from a 10 cc syringe and collect effluent. Repeat this with another 10 ml and again with 5 ml. The isolated MLAS is now ready for freeze drying and subsequent characterization.

30

2. Rotovap until ACN is removed and freeze dry the remaining H<sub>2</sub>O. Sample is now ready for chromatography.

35

- 20 Note: When incorporating the Mega Bond Elut Sep Pak (10 g version) up to 500 mg of sample can be loaded onto the sep pak and with solution volume adjustments, the effluent can be ready for freeze drying within 2 hours.

#### SEP PAK EQUILIBRATION (BOND ELUT, 10G)

40

1. Pass 20 ml of a solution containing 25/75 H<sub>2</sub>O/ACN onto the sep pak using laboratory air or regulated cylinder air at a rate which will allow ~ 40 drops/min. You can not use positive pressure from a syringe because it is not sufficient to move the solution thru the sep pak. Do not allow the sep pak to go dry.

45

2. Immediately pass 20ml (x2) and an additional 10 ml of a solution containing 70/30 H<sub>2</sub>O/ACN in the same manner as #1. Do not allow the sep pak to go dry. Maintain a level of solution (~1mm) at the head of the sep pak.

50

30

3. The sep pak is now ready for sample loading.

55

#### MLAS SAMPLE LOADING/SEPARATION AND ISOLATION

1. Weigh <500 mg of sample into a 2 dram vial and add 5 ml of 70/30 H<sub>2</sub>O/ACN. Sonicate and mix well.
2. Load sample onto Bond Elut and with positive pressure from an air source begin separation. Rinse vial with 2 ml (x2) portions of the 70/30 solution and put onto the sep pak. Maintain ~1mm of solution at the head of the sep pak.
3. Pass 20 ml of 70/30 onto the Bond Elut with positive pressure from an air source at a rate of ~40 drops/min. Repeat this with 6 ml and 8 ml and collect effluent if interested in impurities.

#### MLAS ISOLATION AND COLLECTION

1. Pass 20 ml of solution containing 25/75 H<sub>2</sub>O/ACN with positive pressure from an air source and collect effluent.
2. Repeat this with another 20 ml and again with 10 ml. This isolated fraction contains the pure MLAS.
3. The isolated MLAS is now ready for freeze drying and subsequent characterization.
4. Rotovap until ACN is removed and freeze dry the remaining H<sub>2</sub>O. Sample is now ready for chromatography.

Note: Adjustments in organic modifier concentration may be necessary for optimum separation and isolation.

#### DISTILLATION (DIS)

A 5 liter, 3-necked round bottom flask with 24/40 joints is equipped with a magnetic stir bar. A few boiling chips (Hengar Granules, catalog #136-C) are added to the flask. A 9 1/2 inch long vigreux condenser with a 24/40 joint is placed in the center neck of the flask. A water cooled condenser is attached to the top of the vigreux condenser which is fitted with a calibrated thermometer. A vacuum receiving flask is attached to the end of the condenser. A glass stopper is placed in one side arm of the 5 liter flask and a calibrated thermometer in the other. The flask and the vigreux condenser are wrapped with aluminum foil. To the 5 liter flask, is added 2270 g of an alkylbenzene mixture which contains 10% or more impurities as defined by the GC method. A vacuum line leading from a vacuum pump is attached to the receiving flask. The alkylbenzene mixture

in the 5 liter flask is stirred and vacuum is applied to the system. Once the maximum vacuum is reached (at least 1 inch of Hg pressure by gauge or less), the alkylbenzene mixture is heated by means of an electric heating mantle. The distillate is collected in two fractions. Fraction A is collected from about 25°C to about 90°C as measured by the calibrated thermometer at the top of the vigreux column. Fraction B is collected from about 90°C to about 155°C as measured by the calibrated thermometer at the top of the vigreux column. Fraction A and pot residues (high boiling) are discarded. Fraction B (1881 g) contains the alkylbenzene mixture of interest. The method can be scaled according to the practitioner's needs provided that sufficient quantity of the alkylbenzene mixture remains after distillation for evaluation by NMR methods NMR1 and NMR2.

#### ACIDIFICATION (AC)

Salts of alkylbenzenesulfonic acids are acidified by common means such as reaction in a solvent with HCl or sulfuric acid or by use of an acidic resin such as Amberlyst 15. Acidification is routine to one skilled in the art. After acidifying remove all solvents, especially any moisture, so that the samples are anhydrous and solvent-free.

Note: For all of the below NMR test methods, the chemical shifts of the NMR spectrum are either externally or internally referenced to TMS in CDCl<sub>3</sub>, i.e. chloroform.

#### NMR 1

##### <sup>13</sup>C-NMR 2/3-Phenyl Index for Alkylbenzene Mixtures

A 400 mg sample of an alkylbenzene mixture is dissolved in 1 ml of anhydrous deuterated chloroform containing 1% v/v TMS as reference and placed in a standard NMR tube. The <sup>13</sup>C NMR is run on the sample on a 300 MHz NMR spectrometer using a 20 second recycle time, a 40° <sup>13</sup>C pulse width and gated heteronuclear decoupling. At least 2000 scans are recorded. The region of the <sup>13</sup>C NMR spectrum between about 145.00 ppm to about 150.00 ppm is integrated. The 2/3-Phenyl index of an alkylbenzene mixture is defined by the following equation:

$$\text{2/3-Phenyl Index} = (\text{Integral from about 147.65 ppm to about 148.05 ppm}) / (\text{Integral from about 145.70 ppm to about 146.15 ppm}) \times 100$$

**NMR 2****<sup>13</sup>C-NMR 2-Methyl-2-Phenyl Index**

A 400 mg sample of an anhydrous alkylbenzene mixture is dissolved in 1 ml of anhydrous deuterated chloroform containing 1% v/v TMS as reference and placed in a standard NMR tube. The <sup>13</sup>C NMR is run on the sample on a 300 MHz NMR spectrometer using a 20 second recycle time, a 40° <sup>13</sup>C pulse width and gated heteronuclear decoupling. At least 2000 scans are recorded. The <sup>13</sup>C NMR spectrum region between about 145.00 ppm to about 150.00 ppm is integrated. The 2-methyl-2-phenyl index of an alkylbenzene mixture is defined by the following equation:

$$\text{2-methyl-2-phenyl index} = (\text{Integral from about 149.35 ppm to about 149.80 ppm}) / (\text{Integral from about 145.00 ppm to about 150.00 ppm}).$$

**NMR 3****<sup>13</sup>C-NMR 2/3-Phenyl Index for Alkylbenzenesulfonic Acid Mixtures**

A 400 mg sample of an anhydrous alkylbenzenesulfonic acid mixture is dissolved in 1 ml of anhydrous deuterated chloroform containing 1% v/v TMS as reference and placed in a standard NMR tube. The <sup>13</sup>C NMR is run on the sample on a 300 MHz NMR spectrometer using a 20 second recycle time, a 40° <sup>13</sup>C pulse width and gated heteronuclear decoupling. At least 2000 scans are recorded. The <sup>13</sup>C NMR spectrum region between about 152.50 ppm to about 156.90 ppm is integrated. The 2/3-Phenyl Index of an alkylbenzenesulfonic acid mixture is defined by the following equation:

$$\text{2/3-Phenyl Index} = (\text{Integral from about 154.40 to about 154.80 ppm}) / (\text{Integral from about 152.70 ppm to about 153.15 ppm}) \times 100$$

**NMR 4****<sup>13</sup>C-NMR 2-Methyl-2-Phenyl Index for Alkylbenzenesulfonic Acid Mixtures**

A 400 mg sample of an anhydrous alkylbenzenesulfonic acid mixture is dissolved in 1 ml of anhydrous deuterated chloroform containing 1% v/v TMS as reference and placed in a standard NMR tube. The <sup>13</sup>C NMR is run on the sample on a 300 MHz NMR

spectrometer using a 20 second recycle time, a 40° <sup>13</sup>C pulse width and gated heteronuclear decoupling. At least 2000 scans are recorded. The <sup>13</sup>C NMR spectrum region between about 152.50 ppm to about 156.90 ppm is integrated. The 2-methyl-2-phenyl Index for an alkylbenzenesulfonic acid mixture is defined by the following equation:

$$\text{2-methyl-2-phenyl index} = (\text{Integral from about 156.40 ppm to about 156.65 ppm}) / (\text{Integral from about 152.50 ppm to about 156.90 ppm}).$$

#### Detergent Compositions in Detail

The novel modified alkylbenzene sulfonate surfactant mixtures of the present invention can be incorporated into cleaning compositions, typically termed "detergent compositions" herein since the preferred of such compositions are for laundry cleaning, especially in domestic washing machines or for hand-washing use. These compositions can be in any conventional form, namely, in the form of a liquid, powder, agglomerate, paste, tablet, bar, gel, or granule.

The detergent compositions of the present invention can more generally be used in a wide range of consumer cleaning product compositions including powders, liquids, granules, gels, pastes, tablets, pouches, bars, types delivered in dual-compartment containers, spray or foam detergents and other homogeneous or multiphasic consumer cleaning product forms. They can be used or applied by hand and/or can be applied in unitary or freely alterable dosage, or by automatic dispensing means, or are useful in appliances such as washing-machines or dishwashers or can be used in institutional cleaning contexts, including for example, for personal cleansing in public facilities, for bottle washing, for surgical instrument cleaning or for cleaning electronic components.

They can be used in aqueous or non-aqueous cleaning systems. They can have a wide range of pH, for example from about 2 to about 12 or higher, though alkaline detergent compositions having a pH of from about 8 to about 11 are among the preferred embodiments, and they can have a wide range of alkalinity reserve which can include very high alkalinity reserves as in uses such as drain unblocking in which tens of grams of NaOH equivalent can be present per 100 grams of formulation, ranging through the 1-10

grams of NaOH equivalent and the mild or low-alkalinity ranges of liquid hand cleaners, down to the acid side such as in acidic hard-surface cleaners. Both high-foaming and low-foaming detergent types are encompassed, as well as types for use in all known aqueous and non aqueous consumer product cleaning processes.

Consumer product cleaning compositions are described in the "Surfactant Science Series", Marcel Dekker, New York, Volumes 1-67 and higher. Liquid compositions in particular are described in detail in the Volume 67, "Liquid Detergents", Ed. Kuo-Yann Lai, 1997, ISBN 0-8247-9391-9 incorporated herein by reference. More classical formulations, especially granular types, are described in "Detergent Manufacture including Zeolite Builders and Other New Materials", Ed. M. Sittig, Noyes Data Corporation, 1979 incorporated by reference. See also Kirk Othmer's Encyclopedia of Chemical Technology.

Consumer product cleaning compositions (detergent compositions) herein nonlimitingly include:

Light Duty Liquid Detergents (LDL): these compositions include LDL compositions having surfactancy improving magnesium ions (see for example WO 97/00930 A; GB 2,292,562 A; US 5,376,310; US 5,269,974; US 5,230,823; US 4,923,635; US 4,681,704; US 4,316,824; US 4,133,779) and/or organic diamines and/or various foam stabilizers and/or foam boosters such as amine oxides (see for example US 4,133,779) and/or skin feel modifiers of surfactant, emollient and/or enzymatic types including proteases; and/or antimicrobial agents; more comprehensive patent listings are given in Surfactant Science Series, Vol. 67, pages 240-248.

Heavy Duty Liquid Detergents (HDL): these compositions include both the so-called "structured" or multi-phase (see for example US 4,452,717; US 4,526,709; US 4,530,780; US 4,618,446; US 4,793,943; US 4,659,497; US 4,871,467; US 4,891,147; US 5,006,273; US 5,021,195; US 5,147,576; US 5,160,655) and "non-structured" or isotropic liquid types and can in general be aqueous or nonaqueous (see, for example EP 738,778 A; WO 97/00937 A; WO 97/00936 A; EP 752,466 A; DE 19623623 A; WO 96/10073 A; WO 96/10072 A; US 4,647,393; US 4,648,983; US 4,655,954; US 4,661,280; EP 225,654; US 4,690,771; US 4,744,916; US 4,753,750; US 4,950,424; US 5,004,556; US 5,102,574; WO 94/23009; and can be with bleach (see for example US 4,470,919; US



5 5,250,212; EP 564,250; US 5,264,143; US 5,275,753; US 5,288,746; WO 94/11483; EP  
598,170; EP 598,973; EP 619,368; US 5,431,848; US 5,445,756) and/or enzymes (see for  
10 example US 3,944,470; US 4,111,855; US 4,261,868; US 4,287,082; US 4,305,837; US  
4,404,115; US 4,462,922; US 4,529,5225; US 4,537,706; US 4,537,707; US 4,670,179;  
5 US 4,842,758; US 4,900,475; US 4,908,150; US 5,082,585; US 5,156,773; WO  
92/19709; EP 583,534; EP 583,535; EP 583,536; WO 94/04542; US 5,269,960; EP  
15 633,311; US 5,422,030; US 5,431,842; US 5,442,100) or without bleach and/or enzymes.  
Other patents relating to heavy-duty liquid detergents are tabulated or listed in Surfactant  
Science Series, Vol. 67, pages 309-324.

20 10 Heavy Duty Granular Detergents (HDG): these compositions include both the so-  
called "compact" or agglomerated or otherwise non-spray-dried, as well as the so-called  
"fluffy" or "densified" spray dried granules or spray-dried types. Included are both  
25 phosphated and nonphosphated types. Such detergents can include the more common  
anionic-surfactant based types or can be the so-called "high-nonionic surfactant" types in  
15 which commonly the nonionic surfactant is held in or on an absorbent such as zeolites or  
other porous inorganic salts. Manufacture of HDG's is, for example, disclosed in EP  
30 753,571 A; WO 96/38531 A; US 5,576,285; US 5,573,697; WO 96/34082 A; US  
5,569,645; EP 739,977 A; US 5,565,422; EP 737,739 A; WO 96/27655 A; US 5,554,587;  
WO 96/25482 A; WO 96/23048 A; WO 96/22352 A; EP 709,449 A; WO 96/09370 A;  
35 20 US 5,496,487; US 5,489,392 and EP 694,608 A.

"Softergents" (STW): these compositions include the various granular or liquid  
(see for example EP 753,569 A; US 4,140,641; US 4,639,321; US 4,751,008; EP  
315,126; US 4,844,821; US 4,844,824; US 4,873,001; US 4,911,852; US 5,017,296; EP  
40 422,787) softening-through-the wash types of product and in general can have organic  
25 (e.g., quaternary) or inorganic (e.g., clay) softeners.

Hard Surface Cleaners (HSC): these compositions include all-purpose cleaners  
45 such as cream cleansers and liquid all-purpose cleaners; spray all-purpose cleaners  
including glass and tile cleaners and bleach spray cleaners; and bathroom cleaners  
including mildew-removing, bleach-containing, antimicrobial, acidic, neutral and basic  
30 types. See, for example EP 743,280 A; EP 743,279 A. Acidic cleaners include those of  
50 WO 96/34938 A.

5

10

15

Bar Soaps (BS&HW): these compositions include personal cleansing bars as well as so-called laundry bars (see, for example WO 96/35772 A); including both the syndet and soap-based types and types with softener (see US 5,500,137 or WO 96/01889 A); such compositions can include those made by common soap-making techniques such as plodding and/or more unconventional techniques such as casting, absorption of surfactant into a porous support, or the like. Other bar soaps (see for example BR 9502668; WO 96/04361 A; WO 96/04360 A; US 5,540,852 ) are also included. Other handwash detergents include those such as are described in GB 2,292,155 A and WO 96/01306 A.

20

10

Shampoos and Conditioners (S&C): (see, for example WO 96/37594 A; WO 96/17917 A; WO 96/17590 A; WO 96/17591 A). Such compositions in general include both simple shampoos and the so-called "two-in-one" or with conditioner" types.

25

15

Liquid Soaps (LS): these compositions include both the so-called "antibacterial" and conventional types, as well as those with or without skin conditioners and include types suitable for use in pump dispensers, and by other means such as wall-held devices used institutionally.

30

20

Fabric Softeners (FS): these compositions include both the conventional liquid and liquid concentrate types (see, for example EP 754,749 A; WO 96/21715 A; US 5,531,910; EP 705,900 A; US 5,500,138) as well as dryer-added or substrate-supported types (see, for example US 5,562,847; US 5,559,088; EP 704,522 A). Other fabric softeners include solids (see, for example US 5,505,866).

35

40

25

Special Purpose Cleaners (SPC) including home dry cleaning systems (see for example WO 96/30583 A; WO 96/30472 A; WO 96/30471 A; US 5,547,476; WO 96/37652 A); bleach pretreatment products for laundry (see EP 751,210 A); fabric care pretreatment products (see for example EP 752,469 A); liquid fine fabric detergent types, especially the high-foaming variety; rinse-aids for dishwashing; liquid bleaches including both chlorine type and oxygen bleach type, and disinfecting agents, mouthwashes, denture cleaners (see, for example WO 96/19563 A; WO 96/19562 A), car or carpet cleaners or shampoos (see, for example EP 751,213 A; WO 96/15308 A), hair rinses, shower gels, foam baths and personal care cleaners (see, for example WO 96/37595 A; WO 96/37592 A; WO 96/37591 A; WO 96/37589 A; WO 96/37588 A; GB 2,297,975 A; GB 2,297,762 A; GB 2,297,761 A; WO 96/17916 A; WO 96/12468 A) and metal cleaners; as well as

45

50

55

cleaning auxiliaries such as bleach additives and "stain-stick" or other pre-treat types including special foam type cleaners (see, for example EP 753,560 A; EP 753,559 A; EP 753,558 A; EP 753,557 A; EP 753,556 A) and anti-sunfade treatments (see WO 96/03486 A; WO 96/03481 A; WO 96/03369 A) are also encompassed.

- 5 Detergents with enduring perfume (see for example US 5,500,154; WO 96/02490) are increasingly popular and their use in conjunction with the present surfactant mixtures is envisioned.

**Laundry or Cleaning Adjunct Materials and Methods:**

10 In general, a laundry or cleaning adjunct is any material required to transform a composition containing only the minimum essential ingredients (herein the essential modified alkylbenzene sulfonate surfactant mixture) into a composition useful for laundry or other consumer product cleaning purposes. In preferred embodiments, laundry or cleaning adjuncts are easily recognizable to those of skill in the art as being absolutely characteristic of laundry or cleaning products, especially of laundry or cleaning products intended for direct use by a consumer in a domestic environment.

15 The precise nature of these additional components, and levels of incorporation thereof, will depend on the physical form of the composition and the nature of the cleaning operation for which it is to be used.

20 Preferably, the adjunct ingredients if used with bleach should have good stability therewith. Certain preferred detergent compositions herein should be boron-free and/or phosphate-free as required by legislation. Levels of adjuncts are from about 0.00001% to about 99.9%, by weight of the compositions. Use levels of the overall compositions can vary widely depending on the intended application, ranging for example from a few ppm in solution to so-called "direct application" of the neat cleaning composition to the surface to be cleaned.

25 Common adjuncts include builders, surfactants, enzymes, polymers, bleaches, bleach activators, catalytic materials and the like excluding any materials already defined hereinabove as part of the essential component of the inventive compositions. Other adjuncts herein can include suds boosters, suds suppressors (antifoams) and the like, diverse active ingredients or specialized materials such as dispersant polymers (e.g., from BASF Corp. or Rohm & Haas), color speckles, silvercare, anti-tarnish and/or anti-

corrosion agents, dyes, fillers, germicides, alkalinity sources, hydrotropes, anti-oxidants, enzyme stabilizing agents, pro-perfumes, perfumes, solubilizing agents, carriers, processing aids, pigments, and, for liquid formulations, solvents, as described in detail hereinafter.

Quite typically, laundry or cleaning compositions herein such as laundry detergents, laundry detergent additives, hard surface cleaners, synthetic and soap-based laundry bars, fabric softeners and fabric treatment liquids, solids and treatment articles of all kinds will require several adjuncts, though certain simply formulated products, such as bleach additives, may require only, for example, an oxygen bleaching agent and a surfactant as described herein. A comprehensive list of suitable laundry or cleaning adjunct materials and methods can be found in US Provisional Patent application No. 60/053,318 filed July 21, 1997 and assigned to Procter & Gamble.

Deterative surfactants - The instant compositions desirably include a deterative surfactant used as a co-surfactant with the essential surfactant mixtures. Since the present invention is surfactant-related, in the descriptions of the preferred embodiments of the detergent compositions of the invention, surfactant materials are described and accounted for separately from nonsurfactant adjuncts. Deterative surfactants are extensively illustrated in U.S. 3,929,678, Dec. 30, 1975 Laughlin, et al, and U.S. 4,259,217, March 31, 1981, Murphy; in the series "Surfactant Science", Marcel Dekker, Inc., New York and Basel; in "Handbook of Surfactants", M.R. Porter, Chapman and Hall, 2nd Ed., 1994; in "Surfactants in Consumer Products", Ed. J. Falbe, Springer-Verlag, 1987; and in numerous detergent-related patents assigned to Procter & Gamble and other detergent and consumer product manufacturers.

The deterative surfactant herein includes anionic, nonionic, zwitterionic or amphoteric types of surfactant known for use as cleaning agents in textile laundering, but does not include completely foam-free or completely insoluble surfactants (though these may be used as optional adjuncts). Examples of the type of surfactant considered optional for the present purposes are relatively uncommon as compared with cleaning surfactants but include, for example, the common fabric softener materials such as dioctadecyldimethylammonium chloride.

In more detail, deterative surfactants useful herein, typically at levels from about 1% to about 55%, by weight, suitably include: (1) conventional alkylbenzene sulfonates, including the hard (ABS, TPBS) or linear types and made by known processes such as various HF or solid HF e.g., DETAL® (UOP) process, or made by using other Lewis Acid catalysts e.g.,  $AlCl_3$ , or made using acidic silica/alumina or made from chlorinated hydrocarbons; (2) olefin sulfonates, including  $\alpha$ -olefin sulfonates and sulfonates derived from fatty acids and fatty esters; (3) alkyl or alkenyl sulfosuccinates, including the diester and half-ester types as well as sulfosuccinamates and other sulfonate/ carboxylate surfactant types such as the sulfosuccinates derived from ethoxylated alcohols and alkanolamides; (4) paraffin or alkane sulfonate- and alkyl or alkenyl carboxysulfonate-types including the product of adding bisulfite to alpha olefins; (5) alkylnaphthalenesulfonates; (6) alkyl isethionates and alkoxypropanesulfonates, as well as fatty isethionate esters, fatty esters of ethoxylated isethionate and other ester sulfonates such as the ester of 3-hydroxypropanesulfonate or AVANEL S types; (7) benzene, cumene, toluene, xylene, and naphthalene sulfonates, useful especially for their hydrotrope properties; (8) alkyl ether sulfonates; (9) alkyl amide sulfonates; (10)  $\alpha$ -sulfo fatty acid salts or esters and internal sulfo fatty acid esters; (11) alkylglycerylsulfonates; (12) ligninsulfonates; (13) petroleum sulfonates, sometimes known as heavy alkylate sulfonates; (14) diphenyl oxide disulfonates; (15) linear or branched alkylsulfates or alkenyl sulfates; (16) alkyl or alkylphenol alkoxy sulfate sulfates and the corresponding polyalkoxylates, sometimes known as alkyl ether sulfates, as well as the alkenylalkoxysulfates or alkenylpolyalkoxy sulfates; (17) alkyl amide sulfates or alkenyl amide sulfates, including sulfated alkanolamides and their alkoxyates and polyalkoxylates; (18) sulfated oils, sulfated alkylglycerides, sulfated alkylpolyglycosides or sulfated sugar-derived surfactants; (19) alkyl alkoxy-carboxylates and alkylpolyalkoxy-carboxylates, including galacturonic acid salts; (20) alkyl ester carboxylates and alkenyl ester carboxylates; (21) alkyl or alkenyl carboxylates, especially conventional soaps and  $\alpha,\omega$ - dicarboxylates, including also the alkyl- and alkenylsuccinates; (22) alkyl or alkenyl amide alkoxy- and polyalkoxy-carboxylates; (23) alkyl and alkenyl amidocarboxylate surfactant types, including the sarcosinates, taurides, glycinate, aminopropionates and iminopropionates; (24) amide soaps, sometimes

referred to as fatty acid cyanamides; (25) alkylpolyaminocarboxylates; (26) phosphorus-based surfactants, including alkyl or alkenyl phosphate esters, alkyl ether phosphates including their alkoxyated derivatives, phosphatidic acid salts, alkyl phosphonic acid salts, alkyl di(polyoxyalkylene alkanol) phosphates, amphoteric phosphates such as lecithins; and phosphate/carboxylate, phosphate/sulfate and phosphate/sulfonate types; (27) Pluronic- and Tetronic-type nonionic surfactants; (28) the so-called EO/PO Block polymers, including the diblock and triblock EPE and PEP types; (29) fatty acid polyglycol esters; (30) capped and non-capped alkyl or alkylphenol ethoxylates, propoxylates and butoxylates including fatty alcohol polyethyleneglycol ethers; (31) fatty alcohols, especially where useful as viscosity-modifying surfactants or present as unreacted components of other surfactants; (32) N-alkyl polyhydroxy fatty acid amides, especially the alkyl N- alkylglucamides; (33) nonionic surfactants derived from mono- or polysaccharides or sorbitan, especially the alkylpolyglycosides, as well as sucrose fatty acid esters; (34) ethylene glycol-, propylene glycol-, glycerol- and polyglyceryl- esters and their alkoxyates, especially glycerol ethers and the fatty acid /glycerol monoesters and diesters; (35) aldobionamide surfactants; (36) alkyl succinimide nonionic surfactant types; (37) acetylenic alcohol surfactants, such as the SURFYNOLS; (38) alkanolamide surfactants and their alkoxyated derivatives including fatty acid alkanolamides and fatty acid alkanolamide polyglycol ethers; (39) alkylpyrrolidones; (40) alkyl amine oxides, including alkoxyated or polyalkoxyated amine oxides and amine oxides derived from sugars; (41) alkyl phosphine oxides; (42) sulfoxide surfactants; (43) amphoteric sulfonates, especially sulfobetaines; (44) betaine-type amphoterics, including aminocarboxylate-derived types; (45) amphoteric sulfates such as the alkyl ammonio polyethoxysulfates; (46) fatty and petroleum-derived alkylamines and amine salts; (47) alkylimidazolines; (48) alkylamidoamines and their alkoxyate and polyalkoxyate derivatives; and (49) conventional cationic surfactants, including water-soluble alkyltrimethylammonium salts. Moreover, more unusual surfactant types are included, such as: (50) alkylamidoamine oxides, carboxylates and quaternary salts; (51) sugar-derived surfactants modeled after any of the hereinabove-referenced more conventional nonsugar types; (52) fluorosurfactants; (53) biosurfactants; (54) organosilicon or fluorocarbon surfactants; (55) gemini surfactants, other than the above-referenced


5 diphenyl xide disulfonates, including those derived from glucose; (56) polymeric  
surfactants including amphopolycarboxyglycinates; and (57) bolaform surfactants; in  
10 short any surfactant known for aqueous or nonaqueous cleaning.

In any of the above deterative surfactants, hydrophobe chain length is typically in the  
5 general range C<sub>8</sub>-C<sub>20</sub>, with chain lengths in the range C<sub>8</sub>-C<sub>18</sub> often being preferred,  
especially when laundering is to be conducted in cool water. Selection of chainlengths  
15 and degree of alkoxylation for conventional purposes are taught in the standard texts.  
When the deterative surfactant is a salt, any compatible cation may be present, including H  
(that is, the acid or partly acid form of a potentially acidic surfactant may be used), Na, K,  
20 Mg, ammonium or alkanolammonium, or combinations of cations. Mixtures of deterative  
surfactants having different charges are commonly preferred, especially anionic/cationic,  
anionic / nonionic, anionic / nonionic / cationic, anionic / nonionic / amphoteric, nonionic  
/ cationic and nonionic / amphoteric mixtures. Moreover, any single deterative surfactant  
25 may be substituted, often with desirable results for cool water washing, by mixtures of  
otherwise similar deterative surfactants having differing chainlengths, degree of  
15 unsaturation or branching, degree of alkoxylation (especially ethoxylation), insertion of  
substituents such as ether oxygen atoms in the hydrophobes, or any combinations thereof.

Preferred among the above-identified deterative surfactants are: acid, sodium and  
ammonium C<sub>9</sub>-C<sub>20</sub> linear alkylbenzene sulfonates, particularly sodium linear secondary  
35 alkyl C<sub>10</sub>-C<sub>15</sub> benzenesulfonates though in some regions ABS may be used (1);  
olefinsulfonate salts, (2), that is, material made by reacting olefins, particularly C<sub>10</sub>-C<sub>20</sub>  
α-olefins, with sulfur trioxide and then neutralizing and hydrolyzing the reaction product;  
40 sodium and ammonium C<sub>7</sub>-C<sub>12</sub> dialkyl sulfosuccinates, (3); alkane monosulfonates, (4),  
such as those derived by reacting C<sub>8</sub>-C<sub>20</sub> α-olefins with sodium bisulfite and those  
25 derived by reacting paraffins with SO<sub>2</sub> and Cl<sub>2</sub> and then hydrolyzing with a base to form  
a random sulfonate; α-Sulfo fatty acid salts or esters, (10); sodium  
45 alkylglycerylsulfonates, (11), especially those ethers of the higher alcohols derived from  
tallow or coconut oil and synthetic alcohols derived from petroleum; alkyl or alkenyl  
sulfates, (15), which may be primary or secondary, saturated or unsaturated, branched or  
50 unbranched. Such compounds when branched can be random or regular. When  
secondary, they preferably have formula  $\text{CH}_3(\text{CH}_2)_x(\text{CHOSO}_3^-\text{M}^+) \text{CH}_3$  or

$\text{CH}_3(\text{CH}_2)_x(\text{CHOSO}_3^-\text{M}^+)\text{CH}_2\text{CH}_3$  where  $x$  and  $(y + 1)$  are integers of at least 7, preferably at least 9 and  $\text{M}$  is a water-soluble cation, preferably sodium. When unsaturated, sulfates such as oleyl sulfate are preferred, while the sodium and ammonium alkyl sulfates, especially those produced by sulfating C8-C18 alcohols, produced for example from tallow or coconut oil are also useful; also preferred are the alkyl or alkenyl ether sulfates, (16), especially the ethoxy sulphates having about 0.5 moles or higher of ethoxylation, preferably from 0.5-8; the alkylethercarboxylates, (19), especially the EO 1-5 ethoxycarboxylates; soaps or fatty acids (21), preferably the more water-soluble types; aminoacid-type surfactants, (23), such as sarcosinates, especially oleyl sarcosinate; phosphate esters, (26); alkyl or alkylphenol ethoxylates, propoxylates and butoxylates, (30), especially the ethoxylates "AE", including the so-called narrow peaked alkyl ethoxylates and C6-C12 alkyl phenol alkoxylates as well as the products of aliphatic primary or secondary linear or branched C8-C18 alcohols with ethylene oxide, generally 2-30 EO; N-alkyl polyhydroxy fatty acid amides especially the C12-C18 N-methylglucamides, (32), see WO 9206154, and N-alkoxy polyhydroxy fatty acid amides, such as C10-C18 N-(3-methoxypropyl) glucamide while N-propyl through N-hexyl C12-C18 glucamides can be used for low sudsing; alkyl polyglycosides, (33); amine oxides, (40), preferably alkyldimethylamine N-oxides and their dihydrates; sulfobetaines or "sultaines", (43); betaines (44); and gemini surfactants.

Cationic surfactants suitable for use in the present invention include those having a long-chain hydrocarbonyl group. Examples of such cationic co-surfactants include the ammonium co-surfactants such as alkyldimethylammonium halogenides, and those co-surfactants having the formula:




wherein  $\text{R}^2$  is an alkyl or alkyl benzyl group having from 8 to 18 carbon atoms in the alkyl chain, each  $\text{R}^3$  is selected from the group consisting of  $-\text{CH}_2\text{CH}_2-$ ,  $-\text{CH}_2\text{CH}(\text{CH}_3)-$ ,  $-\text{CH}_2\text{CH}(\text{CH}_2\text{OH})-$ ,  $-\text{CH}_2\text{CH}_2\text{CH}_2-$ , and mixtures thereof; each  $\text{R}^4$  is selected from the group consisting of C1-C4 alkyl, C1-C4 hydroxyalkyl, benzyl ring structures formed by joining the two  $\text{R}^4$  groups,  $-\text{CH}_2\text{CHOH}-\text{CHOH}-\text{COR}^6-\text{CHOH}-\text{CH}_2\text{OH}$  wherein  $\text{R}^6$  is any hexose or hexose polymer having a molecular weight less than about 1000, and hydrogen when  $y$  is not 0;  $\text{R}^5$  is the same as  $\text{R}^4$  or is an alkyl chain wherein the total



number of carbon atoms of  $R^2$  plus  $R^5$  is not more than about 18; each  $y$  is from 0 to about 10 and the sum of the  $y$  values is from 0 to about 15; and  $X$  is any compatible anion.

Examples of other suitable cationic surfactants are described in following documents, all of which are incorporated by reference herein in their entirety: M.C. Publishing Co., McCutcheon's, Detergents & Emulsifiers, (North American edition 1997); Schwartz, et al., Surface Active Agents, Their Chemistry and Technology, New York: Interscience Publishers, 1949; U.S. Patent 3,155,591; U. S. Patent 3,929,678; U. S. Patent 3,959,461 U. S. Patent 4,387,090 and U.S. Patent 4,228,044.

Examples of suitable cationic surfactants are those corresponding to the general formula:



wherein  $R_1$ ,  $R_2$ ,  $R_3$ , and  $R_4$  are independently selected from an aliphatic group of from 1 to about 22 carbon atoms or an aromatic, alkoxy, polyoxyalkylene, alkylamido, hydroxyalkyl, aryl or alkylaryl group having up to about 22 carbon atoms; and  $X$  is a salt-forming anion such as those selected from halogen, (e.g. chloride, bromide), acetate, citrate, lactate, glycolate, phosphate nitrate, sulfate, and alkylsulfate radicals. The aliphatic groups can contain, in addition to carbon and hydrogen atoms, ether linkages, and other groups such as amino groups. The longer chain aliphatic groups, e.g., those of about 12 carbons, or higher, can be saturated or unsaturated. Preferred is when  $R_1$ ,  $R_2$ ,  $R_3$ , and  $R_4$  are independently selected from C1 to about C22 alkyl. Especially preferred are cationic materials containing two long alkyl chains and two short alkyl chains or those containing one long alkyl chain and three short alkyl chains. The long alkyl chains in the compounds described in the previous sentence have from about 12 to about 22 carbon atoms, preferably from about 16 to about 22 carbon atoms, and the short alkyl chains in the compounds described in the previous sentence have from 1 to about 3 carbon atoms, preferably from 1 to about 2 carbon atoms.

Suitable levels of cationic deterative surfactant herein are from about 0.1% to about 20%, preferably from about 1% to about 15%, although much higher levels, e.g., up to about 30% or more, may be useful especially in nonionic: cationic (i.e., limited or anionic-free) formulations. Highly preferred compositions however combine the cationic surfactant at a low level, e.g., from about 0.1% to about 5%, preferably not more than about 2%, with the inventive modified alkylbenzene sulfonate surfactant mixtures.

Another type of useful surfactants are the so-called dianionics. These are surfactants which have at least two anionic groups present on the surfactant molecule. Some suitable dianionic surfactants are further described in copending U.S. Serial No. 60/020,503 (Docket No. 6160P), 60/020,772 (Docket No. 6161P), 60/020,928 (Docket No. 6158P), 60/020,832 (Docket No. 6159P) and 60/020,773 (Docket No. 6162P) all filed on June 28, 1996, and 60/023,539 (Docket No. 6192P), 60/023,493 (Docket No. 6194P), 60/023,540 (Docket No. 6193P) and 60/023,527 (Docket No. 6195P) filed on August 8th, 1996, the disclosures of which are incorporated herein by reference.

Additionally and preferably, the surfactant may be a branched alkyl sulfate, branched alkyl alkoxylate, or branched alkyl alkoxylate sulfate. These surfactants are further described in No. 60/061,971, Attorney docket No 6881P October 14, 1997, No. 60/061,975, Attorney docket No 6882P October 14, 1997, No. 60/062,086, Attorney docket No 6883P October 14, 1997, No. 60/061,916, Attorney docket No 6884P October 14, 1997, No. 60/061,970, Attorney docket No 6885P October 14, 1997, No. 60/062,407, Attorney docket No 6886P October 14, 1997,. Other suitable mid-chain branched surfactants can be found in U.S. Patent applications Serial Nos. 60/032,035 (Docket No. 6401P), 60/031,845 (Docket No. 6402P), 60/031,916 (Docket No. 6403P), 60/031,917 (Docket No. 6404P), 60/031,761 (Docket No. 6405P), 60/031,762 (Docket No. 6406P) and 60/031,844 (Docket No. 6409P). Mixtures of these branched surfactants with conventional linear surfactants are also suitable for use in the present compositions.

Suitable levels of anionic deterative surfactants herein are in the range from about 1% to about 50% or higher, preferably from about 2% to about 30%, more preferably still, from about 5% to about 20% by weight of the detergent composition.

Suitable levels of nonionic deterative surfactant herein are from about 1% to about 40%, preferably from about 2% to about 30%, more preferably from about 5% to about 20%.

Desirable weight ratios of anionic : nonionic surfactants in combination include from 1.0:9.0 to 1.0:0.25, preferably 1.0:1.5 to 1.0:0.4.

Desirable weight ratios of anionic : cationic surfactants in combination include from 50:1 to 5:1, more preferably 35:1 to 15:1.

Suitable levels of cationic deterative surfactant herein are from about 0.1% to about 20%, preferably from about 1% to about 15%, although much higher levels, e.g., up to about 30% or more, may be useful especially in nonionic : cationic (i.e., limited or anionic-free) formulations.

Amphoteric or zwitterionic deterative surfactants when present are usually useful at levels in the range from about 0.1% to about 20% by weight of the detergent composition. Often levels will be limited to about 5% or less, especially when the amphoteric is costly.

Deterative Enzymes - Enzymes are preferably included in the present detergent compositions for a variety of purposes, including removal of protein-based, carbohydrate-based, or triglyceride-based stains from substrates, for the prevention of refugee dye transfer in fabric laundering, and for fabric restoration. Recent enzyme disclosures in detergents useful herein include bleach/amylase/protease combinations (EP 755,999 A; EP 756,001 A; EP 756,000 A); chondriotinase ( EP 747,469 A); protease variants ( WO 96/28566 A; WO 96/28557 A; WO 96/28556 A; WO 96/25489 A); xylanase ( EP 709,452 A); keratinase (EP 747,470 A); lipase ( GB 2,297,979 A; WO 96/16153 A; WO 96/12004 A; EP 698,659 A; WO 96/16154 A); cellulase (GB 2,294,269 A; WO 96/27649 A; GB 2,303,147 A); thermitase (WO 96/28558 A). More generally, suitable enzymes include proteases, amylases, lipases, cellulases, peroxidases, xylanases, keratinases, chondriotinases; thermitases, cutinases and mixtures thereof of any suitable origin, such as vegetable, animal, bacterial, fungal and yeast origin. Preferred selections are influenced by factors such as pH-activity and/or stability optima, thermostability, and stability to active detergents, builders and the like. In this respect bacterial or fungal enzymes are preferred, such as bacterial amylases and proteases, and fungal cellulases. Suitable enzymes are also described in US Patent Nos. 5,677,272, 5,679,630, 5,703,027,

5,703,034, 5,705,464, 5,707,950, 5,707,951, 5,710,115, 5,710,116, 5,710,118, 5,710,119 and 5,721,202.

"Detergent enzyme", as used herein, means any enzyme having a cleaning, stain removing or otherwise beneficial effect in a laundry, hard surface cleaning or personal care detergent composition. Preferred detergent enzymes are hydrolases such as proteases, amylases and lipases. Preferred enzymes for laundry purposes include, but are not limited to, proteases, cellulases, lipases and peroxidases. Highly preferred are amylases and/or proteases, including both current commercially available types and improved types which, though more and more bleach compatible though successive improvements, have a remaining degree of bleach deactivation susceptibility.

Enzymes are normally incorporated into detergent or detergent additive compositions at levels sufficient to provide a "cleaning-effective amount". The term "cleaning effective amount" refers to any amount capable of producing a cleaning, stain removal, soil removal, whitening, deodorizing, or freshness improving effect on substrates such as fabrics, dishware and the like. In practical terms for current commercial preparations, typical amounts are up to about 5 mg by weight, more typically 0.01 mg to 3 mg, of active enzyme per gram of the detergent composition. Stated otherwise, the compositions herein will typically comprise from 0.001% to 5%, preferably 0.01%-1% by weight of a commercial enzyme preparation. Protease enzymes are usually present in such commercial preparations at levels sufficient to provide from 0.005 to 0.1 Anson units (AU) of activity per gram of composition. For certain detergents it may be desirable to increase the active enzyme content of the commercial preparation in order to minimize the total amount of non-catalytically active materials and thereby improve spotting/filming or other end-results. Higher active levels may also be desirable in highly concentrated detergent formulations.

Suitable examples of proteases are the subtilisins which are obtained from particular strains of *B. subtilis* and *B. licheniformis*. One suitable protease is obtained from a strain of *Bacillus*, having maximum activity throughout the pH range of 8-12, developed and sold as ESPERASE® by Novo Industries A/S of Denmark, hereinafter "Novo". The preparation of this enzyme and analogous enzymes is described in GB 1,243,784 to Novo. Other suitable proteases include ALCALASE® and SAVINASE®.

5 from Novo and MAXATASE® from International Bio-Synthetics, Inc., The Netherlands;  
as well as Protease A as disclosed in EP 130,756 A, January 9, 1985 and Protease B as  
10 disclosed in EP 303,761 A, April 28, 1987 and EP 130,756 A, January 9, 1985. See also  
a high pH protease from Bacillus sp. NCIMB 40338 described in WO 9318140 A to  
5 Novo. Enzymatic detergents comprising protease, one or more other enzymes, and a  
reversible protease inhibitor are described in WO 9203529 A to Novo. Other preferred  
15 proteases include those of WO 9510591 A to Procter & Gamble. When desired, a  
protease having decreased adsorption and increased hydrolysis is available as described in  
WO 9507791 to Procter & Gamble. A recombinant trypsin-like protease for detergents  
20 suitable herein is described in WO 9425583 to Novo.

In more detail, an especially preferred protease, referred to as "Protease D" is a  
25 carbonyl hydrolase variant having an amino acid sequence not found in nature, which is  
derived from a precursor carbonyl hydrolase by substituting a different amino acid for a  
plurality of amino acid residues at a position in said carbonyl hydrolase equivalent to  
15 position +76, preferably also in combination with one or more amino acid residue  
positions equivalent to those selected from the group consisting of +99, +101, +103,  
30 +104, +107, +123, +27, +105, +109, +126, +128, +135, +156, +166, +195, +197, +204,  
+206, +210, +216, +217, +218, +222, +260, +265, and/or +274 according to the  
numbering of Bacillus amyloliquefaciens subtilisin, as described in WO 95/10615  
35 published April 20, 1995 by Genencor International.

Useful proteases are also described in PCT publications: WO 95/30010 published  
November 9, 1995 by The Procter & Gamble Company; WO 95/30011 published  
40 November 9, 1995 by The Procter & Gamble Company; WO 95/29979 published  
November 9, 1995 by The Procter & Gamble Company.

25 Amylases suitable herein include, for example,  $\alpha$ -amylases described in GB  
1,296,839 to Novo; RAPIDASE®, International Bio-Synthetics, Inc. and TERMAMYL®,  
45 Novo. FUNGAMYL® from Novo is especially useful. Engineering of enzymes for  
improved stability, e.g., oxidative stability, is known. See, for example J. Biological  
Chem., Vol. 260, No. 11, June 1985, pp. 6518-6521. Certain preferred embodiments of  
50 the present compositions can make use of amylases having improved stability in  
detergents, especially improved oxidative stability as measured against a reference-point

of TERMAMYL® in commercial use in 1993. These preferred amylases herein share the characteristic of being "stability-enhanced" amylases, characterized, at a minimum, by a measurable improvement in one or more of: oxidative stability, e.g., to hydrogen peroxide/tetraacetythylenediamine in buffered solution at pH 9-10; thermal stability, e.g., at common wash temperatures such as about 60°C; or alkaline stability, e.g., at a pH from about 8 to about 11, measured versus the above-identified reference-point amylase. Stability can be measured using any of the art-disclosed technical tests. See, for example, references disclosed in WO 9402597. Stability-enhanced amylases can be obtained from Novo or from Genencor International. One class of highly preferred amylases herein have the commonality of being derived using site-directed mutagenesis from one or more of the Bacillus amylases, especially the Bacillus  $\alpha$ -amylases, regardless of whether one, two or multiple amylase strains are the immediate precursors. Oxidative stability-enhanced amylases vs. the above-identified reference amylase are preferred for use, especially in bleaching, more preferably oxygen bleaching, as distinct from chlorine bleaching, detergent compositions herein. Such preferred amylases include (a) an amylase according to the hereinbefore incorporated WO 9402597, Novo, Feb. 3, 1994, as further illustrated by a mutant in which substitution is made, using alanine or threonine, preferably threonine, of the methionine residue located in position 197 of the B. licheniformis  $\alpha$ -amylase, known as TERMAMYL®, or the homologous position variation of a similar parent amylase, such as B. amyloliquefaciens, B. subtilis, or B. stearothermophilus; (b) stability-enhanced amylases as described by Genencor International in a paper entitled "Oxidatively Resistant  $\alpha$ -Amylases" presented at the 207th American Chemical Society National Meeting, March 13-17 1994, by C. Mitchinson. Therein it was noted that bleaches in automatic dishwashing detergents inactivate  $\alpha$ -amylases but that improved oxidative stability amylases have been made by Genencor from B. licheniformis NCIB8061. Methionine (Met) was identified as the most likely residue to be modified. Met was substituted, one at a time, in positions 8, 15, 197, 256, 304, 366 and 438 leading to specific mutants, particularly important being M197L and M197T with the M197T variant being the most stable expressed variant. Stability was measured in CASCADE® and SUNLIGHT®; (c) particularly preferred amylases herein include amylase variants

5 having additional modification in the immediate parent as described in WO 9510603 A  
and are available from the assignee, Novo, as DURAMYL®. Other particularly preferred  
10 oxidative stability enhanced amylase include those described in WO 9418314 to  
Genencor International and WO 9402597 to Novo. Any other oxidative stability-  
5 enhanced amylase can be used, for example as derived by site-directed mutagenesis from  
15 known chimeric, hybrid or simple mutant parent forms of available amylases. Other  
preferred enzyme modifications are accessible. See WO 9509909 A to Novo.

Other amylase enzymes include those described in WO 95/26397 and in co-  
pending application by Novo Nordisk PCT/DK96/00056. Specific amylase enzymes for  
20 use in the detergent compositions of the present invention include  $\alpha$ -amylases  
characterized by having a specific activity at least 25% higher than the specific activity of  
Termamyl® at a temperature range of 25°C to 55°C and at a pH value in the range of 8 to  
25 10, measured by the Phadebas®  $\alpha$ -amylase activity assay. (Such Phadebas®  $\alpha$ -amylase  
activity assay is described at pages 9-10, WO 95/26397.) Also included herein are  $\alpha$ -  
15 amylases which are at least 80% homologous with the amino acid sequences shown in the  
SEQ ID listings in the references. These enzymes are preferably incorporated into  
30 laundry detergent compositions at a level from 0.00018% to 0.060% pure enzyme by  
weight of the total composition, more preferably from 0.00024% to 0.048% pure enzyme  
by weight of the total composition.

35 20 Cellulases usable herein include both bacterial and fungal types, preferably having  
a pH optimum between 5 and 9.5. U.S. 4,435,307, Barbesgaard et al, March 6, 1984,  
discloses suitable fungal cellulases from *Humicola insolens* or *Humicola* strain DSM1800  
40 or a cellulase 212-producing fungus belonging to the genus *Aeromonas*, and cellulase  
extracted from the hepatopancreas of a marine mollusk, *Dolabella Auricula* Solander.  
25 Suitable cellulases are also disclosed in GB-A-2.075.028; GB-A-2.095.275 and DE-OS-  
2.247.832. CAREZYME® and CELLUZYME®(Novo) are especially useful. See also  
45 WO 9117243 to Novo.

Suitable lipase enzymes for detergent usage include those produced by  
microorganisms of the *Pseudomonas* group, such as *Pseudomonas stutzeri* ATCC 19.154,  
50 30 as disclosed in GB 1,372,034. See also lipases in Japanese Patent Application 53,20487,  
laid open Feb. 24, 1978. This lipase is available from Amano Pharmaceutical Co. Ltd.,

5 Nagoya, Japan, under the trade name Lipase P "Amano," or "Amano-P." Other suitable  
commercial lipases include Amano-CES, lipases ex *Chromobacter viscosum*, e.g.  
10 *Chromobacter viscosum* var. *lipolyticum* NRRLB 3673 from Toyo Jozo Co., Tagata,  
Japan; *Chromobacter viscosum* lipases from U.S. Biochemical Corp., U.S.A. and  
5 Disoynt Co., The Netherlands, and lipases ex *Pseudomonas gladioli*. LIPOLASE®  
15 enzyme derived from *Humicola lanuginosa* and commercially available from Novo, see  
also EP 341,947, is a preferred lipase for use herein. Lipase and amylase variants  
stabilized against peroxidase enzymes are described in WO 9414951 A to Novo. See also  
20 WO 9205249 and RD 94359044.

10 Cutinase enzymes suitable for use herein are described in WO 8809367 A to  
Genencor.

Peroxidase enzymes may be used in combination with oxygen sources, e.g.,  
25 percarbonate, perborate, hydrogen peroxide, etc., for "solution bleaching" or prevention of  
transfer of dyes or pigments removed from substrates during the wash to other substrates  
15 present in the wash solution. Known peroxidases include horseradish peroxidase,  
ligninase, and haloperoxidases such as chloro- or bromo-peroxidase. Peroxidase-  
30 containing detergent compositions are disclosed in WO 89099813 A, October 19, 1989 to  
Novo and WO 8909813 A to Novo.

A range of enzyme materials and means for their incorporation into synthetic  
35 detergent compositions is also disclosed in WO 9307263 A and WO 9307260 A to  
Genencor International, WO 8908694 A to Novo, and U.S. 3,553,139, January 5, 1971 to  
McCarty et al. Enzymes are further disclosed in U.S. 4,101,457, Place et al, July 18,  
40 1978, and in U.S. 4,507,219, Hughes, March 26, 1985. Enzyme materials useful for liquid  
detergent formulations, and their incorporation into such formulations, are disclosed in  
25 U.S. 4,261,868, Hora et al, April 14, 1981. Enzymes for use in detergents can be  
stabilized by various techniques. Enzyme stabilization techniques are disclosed and  
45 exemplified in U.S. 3,600,319, August 17, 1971, Gedge et al, EP 199,405 and EP  
200,586, October 29, 1986, Venegas. Enzyme stabilization systems are also described,  
for example, in U.S. 3,519,570. A useful *Bacillus*, sp. AC13 giving proteases, xylanases  
50 and cellulases, is described in WO 9401532 A to Novo.



Builders - Detergent builders are preferably included in the compositions herein, for example to assist in controlling mineral, especially Ca and/or Mg, hardness in wash water or to assist in the removal and/or suspension of particulate soils from surfaces and sometimes to provide alkalinity and/or buffering action. In solid formulations, builders sometimes serve as absorbents for surfactants. Alternately, certain compositions can be formulated with completely water-soluble builders, whether organic or inorganic, depending on the intended use.

Suitable silicate builders include water-soluble and hydrous solid types and including those having chain-, layer-, or three-dimensional- structure as well as amorphous-solid silicates or other types, for example especially adapted for use in non-structured-liquid detergents. Preferred are alkali metal silicates, particularly those liquids and solids having a  $\text{SiO}_2:\text{Na}_2\text{O}$  ratio in the range 1.6:1 to 3.2:1, including solid hydrous 2-ratio silicates marketed by PQ Corp. under the tradename BRITESIL®, e.g., BRITESIL H<sub>2</sub>O; and layered silicates, e.g., those described in U.S. 4,664,839, May 12, 1987, H. P. Rieck. NaSKS-6, sometimes abbreviated "SKS-6", is a crystalline layered aluminum-free  $\delta\text{-Na}_2\text{SiO}_5$  morphology silicate marketed by Hoechst and is preferred especially in granular laundry compositions. See preparative methods in German DE-A-3,417,649 and DE-A-3,742,043. Other layered silicates, such as those having the general formula  $\text{NaMSi}_x\text{O}_{2x+1}\cdot y\text{H}_2\text{O}$  wherein M is sodium or hydrogen, x is a number from 1.9 to 4, preferably 2, and y is a number from 0 to 20, preferably 0, can also or alternately be used herein. Layered silicates from Hoechst also include NaSKS-5, NaSKS-7 and NaSKS-11, as the  $\alpha$ ,  $\beta$  and  $\gamma$  layer-silicate forms. Other silicates may also be useful, such as magnesium silicate, which can serve as a crispening agent in granules, as a stabilizing agent for bleaches, and as a component of suds control systems.

Also suitable for use herein are synthesized crystalline ion exchange materials or hydrates thereof having chain structure and a composition represented by the following general formula in an anhydride form:  $x\text{M}_2\text{O}\cdot y\text{SiO}_2\cdot z\text{M}'\text{O}$  wherein M is Na and/or K, M' is Ca and/or Mg;  $y/x$  is 0.5 to 2.0 and  $z/x$  is 0.005 to 1.0 as taught in U.S. 5,427,711, Sakaguchi et al, June 27, 1995.

Aluminosilicate builders, such as zeolites, are especially useful in granular detergents, but can also be incorporated in liquids, pastes or gels. Suitable for the present

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

purposes are those having empirical formula:  $[M_z(AlO_2)_z(SiO_2)_v] \cdot xH_2O$  wherein  $z$  and  $v$  are integers of at least 6,  $M$  is an alkali metal, preferably Na and/or K, the molar ratio of  $z$  to  $v$  is in the range from 1.0 to 0.5, and  $x$  is an integer from 15 to 264. Aluminosilicates can be crystalline or amorphous, naturally-occurring or synthetically derived. An aluminosilicate production method is in U.S. 3,985,669, Krummel, et al, October 12, 1976. Preferred synthetic crystalline aluminosilicate ion exchange materials are available as Zeolite A, Zeolite P(B), Zeolite X and, to whatever extent this differs from Zeolite P, the so-called Zeolite MAP. Natural types, including clinoptilolite, may be used. Zeolite A has the formula:  $Na_{12}[(AlO_2)_{12}(SiO_2)_{12}] \cdot xH_2O$  wherein  $x$  is from 20 to 30, especially 27. Dehydrated zeolites ( $x = 0 - 10$ ) may also be used. Preferably, the aluminosilicate has a particle size of 0.1-10 microns in diameter.

Detergent builders in place of or in addition to the silicates and aluminosilicates described hereinbefore can optionally be included in the compositions herein, for example to assist in controlling mineral, especially Ca and/or Mg, hardness in wash water or to assist in the removal of particulate soils from surfaces. Builders can operate via a variety of mechanisms including forming soluble or insoluble complexes with hardness ions, by ion exchange, and by offering a surface more favorable to the precipitation of hardness ions than are the surfaces of articles to be cleaned. Builder level can vary widely depending upon end use and physical form of the composition. Built detergents typically comprise at least about 1% builder. Liquid formulations typically comprise about 5% to about 50%, more typically 5% to 35% of builder. Granular formulations typically comprise from about 10% to about 80%, more typically 15% to 50% builder by weight of the detergent composition. Lower or higher levels of builders are not excluded. For example, certain detergent additive or high-surfactant formulations can be unbuilt.

Suitable builders herein can be selected from the group consisting of phosphates and polyphosphates, especially the sodium salts; carbonates, bicarbonates, sesquicarbonates and carbonate minerals other than sodium carbonate or sesquicarbonate; organic mono-, di-, tri-, and tetracarboxylates especially water-soluble nonsurfactant carboxylates in acid, sodium, potassium or alkanolammonium salt form, as well as oligomeric or water-soluble low molecular weight polymer carboxylates including aliphatic and aromatic types; and phytic acid. These may be complemented by borates,

e.g., for pH-buffering purposes, or by sulfates, especially sodium sulfate and any other fillers or carriers which may be important to the engineering of stable surfactant and/or builder-containing detergent compositions.

Builder mixtures, sometimes termed "builder systems" can be used and typically comprise two or more conventional builders, optionally complemented by chelants, pH-buffers or fillers, though these latter materials are generally accounted for separately when describing quantities of materials herein. In terms of relative quantities of surfactant and builder in the present detergents, preferred builder systems are typically formulated at a weight ratio of surfactant to builder of from about 60:1 to about 1:80. Certain preferred laundry detergents have said ratio in the range 0.90:1.0 to 4.0:1.0, more preferably from 0.95:1.0 to 3.0:1.0.

P-containing detergent builders often preferred where permitted by legislation include, but are not limited to, the alkali metal, ammonium and alkanolammonium salts of polyphosphates exemplified by the tripolyphosphates, pyrophosphates, glassy polymeric meta-phosphates; and phosphonates.

Suitable carbonate builders include alkaline earth and alkali metal carbonates as disclosed in German Patent Application No. 2,321,001 published on November 15, 1973, although sodium bicarbonate, sodium carbonate, sodium sesquicarbonate, and other carbonate minerals such as trona or any convenient multiple salts of sodium carbonate and calcium carbonate such as those having the composition  $2\text{Na}_2\text{CO}_3 \cdot \text{CaCO}_3$  when anhydrous, and even calcium carbonates including calcite, aragonite and vaterite, especially forms having high surface areas relative to compact calcite may be useful, for example as seeds or for use in synthetic detergent bars.

Suitable "organic detergent builders", as described herein for use in the cleaning compositions include polycarboxylate compounds, including water-soluble nonsurfactant dicarboxylates and tricarboxylates. More typically builder polycarboxylates have a plurality of carboxylate groups, preferably at least 3 carboxylates. Carboxylate builders can be formulated in acid, partially neutral, neutral or overbased form. When in salt form, alkali metals, such as sodium, potassium, and lithium, or alkanolammonium salts are preferred. Polycarboxylate builders include the ether polycarboxylates, such as oxydisuccinate, see Berg, U.S. 3,128,287, April 7, 1964, and Lamberti et al, U.S.

3,635,830, January 18, 1972; "TMS/TDS" builders of U.S. 4,663,071, Bush et al, May 5, 1987; and other ether carboxylates including cyclic and alicyclic compounds, such as those described in U.S. Patents 3,923,679; 3,835,163; 4,158,635; 4,120,874 and 4,102,903.

Other suitable organic detergent builders are the ether hydroxypolycarboxylates, copolymers of malic anhydride with ethylene or vinyl methyl ether; 1, 3, 5-trihydroxy benzene-2, 4, 6-trisulphonic acid; carboxymethyloxysuccinic acid; the various alkali metal, ammonium and substituted ammonium salts of polyacetic acids such as ethylenediamine tetraacetic acid and nitrilotriacetic acid; as well as mellitic acid, succinic acid, polymaleic acid, benzene 1,3,5-tricarboxylic acid, carboxymethyloxysuccinic acid, and soluble salts thereof.

Citrates, e.g., citric acid and soluble salts thereof are important carboxylate builders e.g., for heavy duty liquid detergents, due to availability from renewable resources and biodegradability. Citrates can also be used in granular compositions, especially in combination with zeolite and/or layered silicates. Oxydisuccinates are also especially useful in such compositions and combinations.

Where permitted, and especially in the formulation of bars used for hand-laundering operations, alkali metal phosphates such as sodium tripolyphosphates, sodium pyrophosphate and sodium orthophosphate can be used. Phosphonate builders such as ethane-1-hydroxy-1,1-diphosphonate and other known phosphonates, e.g., those of U.S. 3,159,581; 3,213,030; 3,422,021; 3,400,148 and 3,422,137 can also be used and may have desirable antiscaling properties.

Certain deterative surfactants or their short-chain homologues also have a builder action. For unambiguous formula accounting purposes, when they have surfactant capability, these materials are summed up as deterative surfactants. Preferred types for builder functionality are illustrated by: 3,3-dicarboxy-4-oxa-1,6-hexanedioates and the related compounds disclosed in U.S. 4,566,984, Bush, January 28, 1986. Succinic acid builders include the C<sub>5</sub>-C<sub>20</sub> alkyl and alkenyl succinic acids and salts thereof. Succinate builders also include: laurylsuccinate, myristylsuccinate, palmitylsuccinate, 2-dodecenylsuccinate (preferred), 2-pentadecenylsuccinate, and the like. Lauryl-succinates are described in European Patent Application 86200690.5/0,200,263, published

November 5, 1986. Fatty acids, e.g., C<sub>12</sub>-C<sub>18</sub> monocarboxylic acids, can also be incorporated into the compositions as surfactant/builder materials alone or in combination with the aforementioned builders, especially citrate and/or the succinate builders, to provide additional builder activity. Other suitable polycarboxylates are disclosed in U.S. 4,144,226, Crutchfield et al, March 13, 1979 and in U.S. 3,308,067, Diehl, March 7, 1967. See also Diehl, U.S. 3,723,322.

Other types of inorganic builder materials which can be used have the formula (M<sub>x</sub>)<sub>i</sub> Ca<sub>y</sub> (CO<sub>3</sub>)<sub>z</sub> wherein x and i are integers from 1 to 15, y is an integer from 1 to 10, z is an integer from 2 to 25, M<sub>i</sub> are cations, at least one of which is a water-soluble, and the equation  $\sum_i = 1-15(x_i \text{ multiplied by the valence of } M_i) + 2y = 2z$  is satisfied such that the formula has a neutral or "balanced" charge. These builders are referred to herein as "Mineral Builders", examples of these builders, their use and preparation can be found in US Patent 5,707,959. Another suitable class of inorganic builders are the Magnesiosilicates, see WO97/0179.

#### Oxygen Bleaching Agents:

Cleaning compositions of the present invention preferably may comprise, as part or all of the conventional adjunct materials, an "oxygen bleaching agent". Oxygen bleaching agents useful in the present invention can be any of the oxidizing agents known for laundry, hard surface cleaning, automatic dishwashing or denture cleaning purposes.

Oxygen bleaches or mixtures thereof are preferred, though other oxidant bleaches, such as an enzymatic hydrogen peroxide producing system, or hypohalites such as chlorine bleaches like hypochlorite, may also be used. Oxygen bleaching "systems" in general contain two or more materials contributing to oxygen bleaching, commonly a source of oxygen bleach, such as perborate or even oxygen from the air, and a catalyst and/or a bleach activator.

Common oxygen bleaches of the peroxygen type include hydrogen peroxide, inorganic peroxohydrates, organic peroxohydrates and the organic peroxyacids, including hydrophilic and hydrophobic mono- or di- peroxyacids. These can be peroxycarboxylic acids, peroxyimide acids, amidoperoxycarboxylic acids, or their salts including the calcium, magnesium, or mixed-cation salts. Peracids of various kinds can be used both in free form and as precursors known as "bleach activators" or "bleach promoters" which,

when combined with a source of hydrogen peroxide, perhydrolyze to release the corresponding peracid.

Also useful herein as oxygen bleaches are the inorganic peroxides such as  $\text{Na}_2\text{O}_2$ , superoxides such as  $\text{KO}_2$ , organic hydroperoxides such as cumene hydroperoxide and t-butyl hydroperoxide, and the inorganic peroxyacids and their salts such as the peroxosulfuric acid salts, especially the potassium salts of peroxodisulfuric acid and, more preferably, of peroxomonosulfuric acid including the commercial triple-salt form sold as OXONE by DuPont and also any equivalent commercially available forms such as CUROX from Akzo or CAROAT from Degussa. Certain organic peroxides, such as dibenzoyl peroxide, may be useful, especially as additives rather than as primary oxygen bleach.

Mixed oxygen bleach systems are generally useful, as are mixtures of any oxygen bleaches with the known bleach activators, organic catalysts, enzymatic catalysts and mixtures thereof; moreover such mixtures may further include brighteners, photobleaches and dye transfer inhibitors of types well-known in the art.

Preferred oxygen bleaches, as noted, include the peroxyhydrates, sometimes known as peroxyhydrates or peroxyhydrates. These are organic or, more commonly, inorganic salts capable of releasing hydrogen peroxide readily. Peroxyhydrates are the most common examples of "hydrogen peroxide source" materials and include the perborates, percarbonates, perphosphates, and persulfates. Suitable peroxyhydrates include sodium carbonate peroxyhydrate and equivalent commercial "percarbonate" bleaches, and any of the so-called sodium perborate hydrates, the "tetrahydrate" and "monohydrate" being preferred; though sodium pyrophosphate peroxyhydrate can be used. Many such peroxyhydrates are available in processed forms with coatings, such as of silicate and/or borate and/or waxy materials and/or surfactants, or have particle geometries, such as compact spheres, which improve storage stability. By way of organic peroxyhydrates, urea peroxyhydrate can also be useful herein.

Percarbonate bleach includes, for example, dry particles having an average particle size in the range from about 500 micrometers to about 1,000 micrometers, not more than about 10% by weight of said particles being smaller than about 200 micrometers and not more than about 10% by weight of said particles being larger than about 1,250

micrometers. Percarbonates and perborates are widely available in commerce, for example from FMC, Solvay and Tokai Denka.

Organic percarboxylic acids useful herein as the oxygen bleach include magnesium monoperoxyphthalate hexahydrate, available from Interlox, m-chloro perbenzoic acid and its salts, 4-nonylamino-4-oxoperoxybutyric acid and diperoxydodecanedioic acid and their salts. Such bleaches are disclosed in U.S. 4,483,781, U.S. Pat. Appl. 740,446, Burns et al, filed June 3, 1985, EP-A 133,354, published February 20, 1985, and U.S. 4,412,934. Organic percarboxylic acids usable herein include those containing one, two or more peroxy groups, and can be aliphatic or aromatic. Highly preferred oxygen bleaches also include 6-nonylamino-6-oxoperoxyacaproic acid (NAPAA) as described in U.S. 4,634,551.

An extensive and exhaustive listing of useful oxygen bleaches, including inorganic peroxohydrates, organic peroxohydrates and the organic peroxyacids, including hydrophilic and hydrophobic mono- or di- peroxyacids, peroxydicarboxylic acids, peroxyimide acids, amidoperoxydicarboxylic acids, or their salts including the calcium, magnesium, or mixed-cation salts, can be found in US Patents 5,622,646 and 5,686,014.

Other useful peracids and bleach activators herein are in the family of imidoperoacids and imido bleach activators. These include phthaloylimidoperoxyacaproic acid and related arylimido-substituted and acyloxynitrogen derivatives. For listings of such compounds, preparations and their incorporation into laundry compositions including both granules and liquids, See U.S. 5,487,818; U.S. 5,470,988, U.S. 5,466,825; U.S. 5,419,846; U.S. 5,415,796; U.S. 5,391,324; U.S. 5,328,634; U.S. 5,310,934; U.S. 5,279,757; U.S. 5,246,620; U.S. 5,245,075; U.S. 5,294,362; U.S. 5,423,998; U.S. 5,208,340; U.S. 5,132,431 and U.S. 5,087,385.

Useful diperoxyacids include, for example, 1,12-diperoxydodecanedioic acid (DPDA); 1,9-diperoxyazelaic acid; diperoxybrassicic acid; diperoxysebacic acid and diperoxyisophthalic acid; 2-decyldiperoxybutane-1,4-dioic acid; and 4,4'-sulphonylbisperoxybenzoic acid.

More generally, the terms "hydrophilic" and "hydrophobic" used herein in connection with any of the oxygen bleaches, especially the peracids, and in connection

with bleach activators, are in the first instance based on whether a given oxygen bleach effectively performs bleaching of fugitive dyes in solution thereby preventing fabric graying and discoloration and/or removes more hydrophilic stains such as tea, wine and grape juice - in this case it is termed "hydrophilic". When the oxygen bleach or bleach activator has a significant stain removal, whiteness-improving or cleaning effect on dingy, greasy, carotenoid, or other hydrophobic soils, it is termed "hydrophobic". The terms are applicable also when referring to peracids or bleach activators used in combination with a hydrogen peroxide source. The current commercial benchmarks for hydrophilic performance of oxygen bleach systems are: TAED or peracetic acid, for benchmarking hydrophilic bleaching. NOBS or NAPAA are the corresponding benchmarks for hydrophobic bleaching. The terms "hydrophilic", "hydrophobic" and "hydrotropic" with reference to oxygen bleaches including peracids and here extended to bleach activator have also been used somewhat more narrowly in the literature. See especially Kirk Othmer's Encyclopedia of Chemical Technology, Vol. 4., pages 284-285. This reference provides a chromatographic retention time and critical micelle concentration-based set of criteria, and is useful to identify and/or characterize preferred sub-classes of hydrophobic, hydrophilic and hydrotropic oxygen bleaches and bleach activators that can be used in the present invention.

#### Bleach Activators

Bleach activators useful herein include amides, imides, esters and anhydrides. Commonly at least one substituted or unsubstituted acyl moiety is present, covalently connected to a leaving group as in the structure  $R-C(O)-L$ . In one preferred mode of use, bleach activators are combined with a source of hydrogen peroxide, such as the perborates or percarbonates, in a single product. Conveniently, the single product leads to in situ production in aqueous solution (i.e., during the washing process) of the percarboxylic acid corresponding to the bleach activator. The product itself can be hydrous, for example a powder, provided that water is controlled in amount and mobility such that storage stability is acceptable. Alternately, the product can be an anhydrous solid or liquid. In another mode, the bleach activator or oxygen bleach is incorporated in a pretreatment product, such as a stain stick; soiled, pretreated substrates can then be exposed to further treatments, for example of a hydrogen peroxide source.



5 With respect to the above bleach activator structure  $RC(O)L$ , the atom in the leaving group connecting to the peracid-forming acyl moiety  $R(C)O-$  is most typically O or N.

10 Bleach activators can have non-charged, positively or negatively charged peracid-forming moieties and/or noncharged, positively or negatively charged leaving groups.

15 One or more peracid-forming moieties or leaving-groups can be present. See, for example, U.S. 5,595,967, U.S. 5,561,235, U.S. 5,560,862 or the bis-(peroxy-carbonic) system of U.S. 5,534,179. Mixtures of suitable bleach activators can also be used.

20 Bleach activators can be substituted with electron-donating or electron-releasing moieties either in the leaving-group or in the peracid-forming moiety or moieties, changing their reactivity and making them more or less suited to particular pH or wash conditions. For example, electron-withdrawing groups such as  $NO_2$  improve the efficacy of bleach activators intended for use in mild-pH (e.g., from about 7.5- to about 9.5) wash conditions.

25 An extensive and exhaustive disclosure of suitable bleach activators and suitable leaving groups, as well as how to determine suitable activators, can be found in US Patents 5,686,014 and 5,622,646.

30 Cationic bleach activators include quaternary carbamate-, quaternary carbonate-, quaternary ester- and quaternary amide- types, delivering a range of cationic peroxyimidic, peroxycarbonic or peroxycarboxylic acids to the wash. An analogous but non-cationic palette of bleach activators is available when quaternary derivatives are not desired. In more detail, cationic activators include quaternary ammonium-substituted activators of WO 96-06915, U.S. 4,751,015 and 4,397,757, EP-A-284292, EP-A-331,229 and EP-A-03520. Also useful are cationic nitriles as disclosed in EP-A-303,520 and in European Patent Specification 458,396 and 464,880. Other nitrile types

35 have electron-withdrawing substituents as described in U.S. 5,591,378.

40 Other bleach activator disclosures include GB 836,988; 864,798; 907,356; 1,003,310 and 1,519,351; German Patent 3,337,921; EP-A-0185522; EP-A-0174132; EP-A-0120591; U.S. Pat. Nos. 1,246,339; 3,332,882; 4,128,494; 4,412,934 and 4,675,393, and the phenol sulfonate ester of alkanoyl aminoacids disclosed in U.S.

45 5,523,434. Suitable bleach activators include any acetylated diamine types, whether hydrophilic or hydrophobic in character.

50

55

Of the above classes of bleach precursors, preferred classes include the esters, including acyl phenol sulfonates, acyl alkyl phenol sulfonates or acyl oxybenzenesulfonates (OBS leaving-group); the acyl-amides; and the quaternary ammonium substituted peroxyacid precursors including the cationic nitriles.

Preferred bleach activators include N,N,N',N'-tetraacetyl ethylene diamine (TAED) or any of its close relatives including the triacetyl or other unsymmetrical derivatives. TAED and the acetylated carbohydrates such as glucose pentaacetate and tetraacetyl xylose are preferred hydrophilic bleach activators. Depending on the application, acetyl triethyl citrate, a liquid, also has some utility, as does phenyl benzoate.

Preferred hydrophobic bleach activators include sodium nonanoyloxybenzene sulfonate (NOBS or SNOBS), N-(alkanoyl)aminoalkanoyloxy benzene sulfonates, such as 4-[N-(nonanoyl)aminohexanoyloxy]-benzene sulfonate or (NACA-OBS) as described in US Patent 5,534,642 and in EPA 0 355 384 A1, substituted amide types described in detail hereinafter, such as activators related to NAPAA, and activators related to certain imidoperacid bleaches, for example as described in U.S. Patent 5,061,807, issued October 29, 1991 and assigned to Hoechst Aktiengesellschaft of Frankfurt, Germany and Japanese Laid-Open Patent Application (Kokai) No. 4-28799.


Another group of peracids and bleach activators herein are those derivable from acyclic imidoperoxydicarboxylic acids and salts thereof, See US Patent 5,415,796, and cyclic imidoperoxydicarboxylic acids and salts thereof, see US patents 5,061,807, 5,132,431, 5,654,269, 5,246,620, 5,419,864 and 5,438,147.

Other suitable bleach activators include sodium-4-benzoyloxy benzene sulfonate (SBOBS); sodium-1-methyl-2-benzoyloxy benzene-4-sulphonate; sodium-4-methyl-3-benzoyloxy benzoate (SPCC); trimethyl ammonium toluoyloxy-benzene sulfonate; or sodium 3,5,5-trimethyl hexanoyloxybenzene sulfonate (STHOBS).

Bleach activators may be used in an amount of up to 20%, preferably from 0.1-10% by weight, of the composition, though higher levels, 40% or more, are acceptable, for example in highly concentrated bleach additive product forms or forms intended for appliance automated dosing.

Highly preferred bleach activators useful herein are amide-substituted and an extensive and exhaustive disclosure of these activators can be found in US Patents 5,686,014 and 5,622,646.

Other useful activators, disclosed in U.S. 4,966,723, are benzoxazin-type, such as a C<sub>6</sub>H<sub>4</sub> ring to which is fused in the 1,2-positions a moiety --C(O)OC(R<sup>1</sup>)=N-. A highly preferred activator of the benzoxazin-type is:



Depending on the activator and precise application, good bleaching results can be obtained from bleaching systems having with in-use pH of from about 6 to about 13, preferably from about 9.0 to about 10.5. Typically, for example, activators with electron-withdrawing moieties are used for near-neutral or sub-neutral pH ranges. Alkalis and buffering agents can be used to secure such pH.

Acyl lactam activators are very useful herein, especially the acyl caprolactams (see for example WO 94-28102 A) and acyl valerolactams (see U.S. 5,503,639). See also U.S. 4,545,784 which discloses acyl caprolactams, including benzoyl caprolactam adsorbed into sodium perborate. In certain preferred embodiments of the invention, NOBS, lactam activators, imide activators or amide-functional activators, especially the more hydrophobic derivatives, are desirably combined with hydrophilic activators such as TAED, typically at weight ratios of hydrophobic activator : TAED in the range of 1:5 to 5:1, preferably about 1:1. Other suitable lactam activators are alpha-modified, see WO 96-22350 A1, July 25, 1996. Lactam activators, especially the more hydrophobic types, are desirably used in combination with TAED, typically at weight ratios of amido-derived or caprolactam activators : TAED in the range of 1:5 to 5:1, preferably about 1:1. See also the bleach activators having cyclic amidine leaving-group disclosed in U.S. 5,552,556.

Nonlimiting examples of additional activators useful herein are to be found in U.S. 4,915,854, U.S. 4,412,934 and 4,634,551. The hydrophobic activator

nonanoyloxybenzene sulfonate (NOBS) and the hydrophilic tetraacetyl ethylene diamine (TAED) activator are typical, and mixtures thereof can also be used.

Additional activators useful herein include those of U.S. 5,545,349, which is also incorporated herein by reference.

5 Transition Metal Bleach Catalysts:

15 If desired, the bleaching compounds can be catalyzed by means of a manganese compound. Such compounds are well known in the art and include, for example, the manganese-based catalysts disclosed in U.S. Pat. 5,246,621, U.S. Pat. 5,244,594; U.S. Pat. 5,194,416; U.S. Pat. 5,114,606; European Pat. App. Pub. Nos. 549,271A1, 549,272A1, 544,440A2, 544,490A1; and PCT applications PCT/IB98/00298 (Attorney Docket No. 6527X), PCT/IB98/00299 (Attorney Docket No. 6537), PCT/IB98/00300 (Attorney Docket No. 6525XL&), and PCT/IB98/00302 (Attorney Docket No. 6524L#); Preferred examples of these catalysts include  $\text{Mn}^{\text{IV}}_2(\text{u-O})_3(1,4,7\text{-trimethyl-1,4,7-triazacyclononane})_2(\text{PF}_6)_2$ ,  $\text{Mn}^{\text{III}}_2(\text{u-O})_1(\text{u-OAc})_2(1,4,7\text{-trimethyl-1,4,7-triazacyclononane})_2(\text{ClO}_4)_2$ ,  $\text{Mn}^{\text{IV}}_4(\text{u-O})_6(1,4,7\text{-triacyclononane})_4(\text{ClO}_4)_4$ ,  $\text{Mn}^{\text{III}}\text{-Mn}^{\text{IV}}_4(\text{u-O})_1(\text{u-OAc})_2(1,4,7\text{-trimethyl-1,4,7-triazacyclononane})_2(\text{ClO}_4)_3$ ,  $\text{Mn}^{\text{IV}}(1,4,7\text{-trimethyl-1,4,7-triazacyclononane})\text{-}(\text{OCH}_3)_3(\text{PF}_6)$ , and mixtures thereof. Other metal-based bleach catalysts include those disclosed in U.S. Patents 4,430,243, 5,114,611, 5,622,646 and 5,686,014. The use of manganese with various complex ligands to enhance bleaching is also reported in the following United States Patents: 4,728,455; 5,284,944; 5,246,612; 5,256,779; 5,280,117; 5,274,147; 5,153,161; and 5,227,084.

35 Cobalt bleach catalysts useful herein are known, and are described, for example, in M. L. Tobe, "Base Hydrolysis of Transition-Metal Complexes", Adv. Inorg. Bioinorg. Mech., (1983), 2, pages 1-94. The most preferred cobalt catalyst useful herein are cobalt 40 pentaamine acetate salts having the formula  $[\text{Co}(\text{NH}_3)_5\text{OAc}] \text{ T}_y$ , wherein "OAc" represents an acetate moiety and "T<sub>y</sub>" is an anion, and especially cobalt pentaamine acetate chloride,  $[\text{Co}(\text{NH}_3)_5\text{OAc}]\text{Cl}_2$ ; as well as  $[\text{Co}(\text{NH}_3)_5\text{OAc}](\text{OAc})_2$ ;  $[\text{Co}(\text{NH}_3)_5\text{OAc}](\text{PF}_6)_2$ ;  $[\text{Co}(\text{NH}_3)_5\text{OAc}](\text{SO}_4)$ ;  $[\text{Co}(\text{NH}_3)_5\text{OAc}](\text{BF}_4)_2$ ; and  $[\text{Co}(\text{NH}_3)_5\text{OAc}](\text{NO}_3)_2$  (herein "PAC"). These cobalt catalysts are readily prepared by 45 known procedures, such as taught for example in the Tobe article and the references cited therein, and in U.S. Patent 4,810,410, to Diakun et al, issued March 7, 1989. 50

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

Compositions herein may also suitably include as a bleach catalyst the class of transition metal complexes of a macropolycyclic rigid ligand. The phrase "macropolycyclic rigid ligand" is sometimes abbreviated as "MRL". One useful MRL is [MnBcyclamCl<sub>2</sub>], where "Bcyclam" is (5,12-dimethyl-1,5,8,12-tetraaza-bicyclo[6.6.2]hexadecane). See PCT applications PCT/IB98/00298 (Attorney Docket No. 6527X), PCT/IB98/00299 (Attorney Docket No. 6537), PCT/IB98/00300 (Attorney Docket No. 6525XL&), and PCT/IB98/00302 (Attorney Docket No. 6524L#). The amount used is a catalytically effective amount, suitably about 1 ppb or more, for example up to about 99.9%, more typically about 0.001 ppm or more, preferably from about 0.05 ppm to about 500 ppm (wherein "ppb" denotes parts per billion by weight and "ppm" denotes parts per million by weight).

As a practical matter, and not by way of limitation, the compositions and cleaning processes herein can be adjusted to provide on the order of at least one part per hundred million of the active bleach catalyst species in the aqueous washing medium, and will preferably provide from about 0.01 ppm to about 25 ppm, more preferably from about 0.05 ppm to about 10 ppm, and most preferably from about 0.1 ppm to about 5 ppm, of the bleach catalyst species in the wash liquor. In order to obtain such levels in the wash liquor of an automatic washing process, typical compositions herein will comprise from about 0.0005% to about 0.2%, more preferably from about 0.004% to about 0.08%, of bleach catalyst, especially manganese or cobalt catalysts, by weight of the cleaning compositions.

#### Enzymatic sources of hydrogen peroxide

On a different track from the bleach activators illustrated hereinabove, another suitable hydrogen peroxide generating system is a combination of a C<sub>1</sub> -C<sub>4</sub> alkanol oxidase and a C<sub>1</sub> -C<sub>4</sub> alkanol, especially a combination of methanol oxidase (MOX) and ethanol. Such combinations are disclosed in WO 94/03003. Other enzymatic materials related to bleaching, such as peroxidases, haloperoxidases, oxidases, superoxide dismutases, catalases and their enhancers or, more commonly, inhibitors, may be used as optional ingredients in the instant compositions.

#### Oxygen transfer agents and precursors

Also useful herein are any of the known organic bleach catalysts, oxygen transfer agents or precursors therefor. These include the compounds themselves and/or their precursors, for example any suitable ketone for production of dioxiranes and/or any of the hetero-atom containing analogs of dioxirane precursors or dioxiranes, such as sulfonimines  $R^1R^2C=NSO_2R^3$ , see EP 446 982 A, published 1991 and sulfonyloxaziridines, see EP 446,981 A, published 1991. Preferred examples of such materials include hydrophilic or hydrophobic ketones, used especially in conjunction with monoperoxyulfates to produce dioxiranes in situ, and/or the imines described in U.S. 5,576,282 and references described therein. Oxygen bleaches preferably used in conjunction with such oxygen transfer agents or precursors include percarboxylic acids and salts, percarbonic acids and salts, peroxymonosulfuric acid and salts, and mixtures thereof. See also U.S. 5,360,568; U.S. 5,360,569; U.S. 5,370,826 and US 5,442,066.

Although oxygen bleach systems and/or their precursors may be susceptible to decomposition during storage in the presence of moisture, air (oxygen and/or carbon dioxide) and trace metals (especially rust or simple salts or colloidal oxides of the transition metals) and when subjected to light, stability can be improved by adding common sequestrants (chelants) and/or polymeric dispersants and/or a small amount of antioxidant to the bleach system or product. See, for example, U.S. 5,545,349. Antioxidants are often added to detergent ingredients ranging from enzymes to surfactants. Their presence is not necessarily inconsistent with use of an oxidant bleach; for example, the introduction of a phase barrier may be used to stabilize an apparently incompatible combination of an enzyme and antioxidant, on one hand, and an oxygen bleach, on the other. Although commonly known substances can be used as antioxidants, For example see US Patents 5686014, 5622646, 5055218, 4853143, 4539130 and 4483778. Preferred antioxidants are 3,5-di-tert-butyl-4-hydroxytoluene, 2,5-di-tert-butylhydroquinone and D.L.-alpha -tocopherol.

Polymeric Soil Release Agent - The compositions according to the present invention may optionally comprise one or more soil release agents. Polymeric soil release agents are characterized by having both hydrophilic segments, to hydrophilize the surface of hydrophobic fibers, such as polyester and nylon, and hydrophobic segments, to deposit upon hydrophobic fibers and remain adhered thereto through completion of the laundry

5 cycle and , thus, serve as an anchor for the hydrophilic segments. This can enable stains  
occurring subsequent to treatment with the soil release agent to be more easily cleaned in  
10 later washing procedures.

If utilized, soil release agents will generally comprise from about 0.01% to about  
5 10% preferably from about 0.1% to about 5%, more preferably from about 0.2% to about  
15 3% by weight, of the composition.

The following, all included herein by reference, describe soil release polymers  
suitable for us in the present invention. U.S. 5,691,298 Gosselink et al., issued November  
25, 1997; U.S. 5,599,782 Pan et al., issued February 4, 1997; U.S. 5,415,807 Gosselink et  
20 al., issued May 16, 1995; U.S. 5,182,043 Morrall et al., issued January 26, 1993; U.S.  
4,956,447 Gosselink et al., issued September 11, 1990; U.S. 4,976,879 Maldonado et al.  
issued December 11, 1990; U.S. 4,968,451 Scheibel et al., issued November 6, 1990; U.S.  
25 4,925,577 Borchert, Sr. et al., issued May 15, 1990; U.S. 4,861,512 Gosselink, issued  
August 29, 1989; U.S. 4,877,896 Maldonado et al., issued October 31, 1989; U.S.  
15 4,702,857 Gosselink et al., issued October 27, 1987; U.S. 4,711,730 Gosselink et al.,  
issued December 8, 1987; U.S. 4,721,580 Gosselink issued January 26, 1988; U.S.  
30 4,000,093 Nicol et al., issued December 28, 1976; U.S. 3,959,230 Hayes, issued May 25,  
1976; U.S. 3,893,929 Basadur, issued July 8, 1975; and European Patent Application 0  
219 048, published April 22, 1987 by Kud et al.

35 Further suitable soil release agents are described in U.S. 4,201,824 Voilland et al.;  
U.S. 4,240,918 Lagasse et al.; U.S. 4,525,524 Tung et al.; U.S. 4,579,681 Ruppert et al.;  
U.S. 4,220,918; U.S. 4,787,989; EP 279,134 A, 1988 to Rhone-Poulenc Chemie; EP  
457,205 A to BASF (1991); and DE 2,335,044 to Unilever N.V., 1974; all incorporated  
40 herein by reference.

25 Clay Soil Removal/Anti-redeposition Agents - The compositions of the present invention  
can also optionally contain water-soluble ethoxylated amines having clay soil removal and  
antiredeposition properties. Granular detergent compositions which contain these  
45 compounds typically contain from about 0.01% to about 10.0% by weight of the water-  
soluble ethoxylated amines; liquid detergent compositions typically contain about 0.01%  
30 to about 5%.

5 A preferred soil release and anti-redeposition agent is ethoxylated tetraethylene  
pentamine. Exemplary ethoxylated amines are further described in U.S. Patent 4,597,898,  
10 VanderMeer, issued July 1, 1986. Another group of preferred clay soil removal-  
antiredeposition agents are the cationic compounds disclosed in European Patent  
5 Application 111,965, Oh and Gosselink, published June 27, 1984. Other clay soil  
removal/antiredeposition agents which can be used include the ethoxylated amine  
15 polymers disclosed in European Patent Application 111,984, Gosselink, published June  
27, 1984; the zwitterionic polymers disclosed in European Patent Application 112,592,  
Gosselink, published July 4, 1984; and the amine oxides disclosed in U.S. Patent  
20 4,548,744, Connor, issued October 22, 1985. Other clay soil removal and/or anti  
redeposition agents known in the art can also be utilized in the compositions herein. See  
U.S. Patent 4,891,160, VanderMeer, issued January 2, 1990 and WO 95/32272, published  
November 30, 1995. Another type of preferred antiredeposition agent includes the  
25 carboxy methyl cellulose (CMC) materials. These materials are well known in the art.

15 Polymeric Dispersing Agents - Polymeric dispersing agents can advantageously be  
utilized at levels from about 0.1% to about 7%, by weight, in the compositions herein,  
30 especially in the presence of zeolite and/or layered silicate builders. Suitable polymeric  
dispersing agents include polymeric polycarboxylates and polyethylene glycols, although  
others known in the art can also be used. It is believed, though it is not intended to be  
35 limited by theory, that polymeric dispersing agents enhance overall detergent builder  
performance, when used in combination with other builders (including lower molecular  
weight polycarboxylates) by crystal growth inhibition, particulate soil release, peptization,  
and anti-redeposition.

40 Polymeric polycarboxylate materials can be prepared by polymerizing or  
25 copolymerizing suitable unsaturated monomers, preferably in their acid form.  
Unsaturated monomeric acids that can be polymerized to form suitable polymeric  
polycarboxylates include acrylic acid, maleic acid (or maleic anhydride), fumaric acid,  
45 itaconic acid, aconitic acid, mesaconic acid, citraconic acid and methylenemalononic acid.  
The presence in the polymeric polycarboxylates herein or monomeric segments,  
30 containing no carboxylate radicals such as vinylmethyl ether, styrene, ethylene, etc. is  
suitable provided that such segments do not constitute more than about 40% by weight.



5

10

15

20

25

30

35

40

45

50

55

Particularly suitable polymeric polycarboxylates can be derived from acrylic acid. Such acrylic acid-based polymers which are useful herein are the water-soluble salts of polymerized acrylic acid. The average molecular weight of such polymers in the acid form preferably ranges from about 2,000 to 10,000, more preferably from about 4,000 to 7,000 and most preferably from about 4,000 to 5,000. Water-soluble salts of such acrylic acid polymers can include, for example, the alkali metal, ammonium and substituted ammonium salts. Soluble polymers of this type are known materials. Use of polyacrylates of this type in detergent compositions has been disclosed, for example, in Diehl, U.S. Patent 3,308,067, issued March 7, 1967.

Acrylic/maleic-based copolymers may also be used as a preferred component of the dispersing/anti-redeposition agent. Such materials include the water-soluble salts of copolymers of acrylic acid and maleic acid. The average molecular weight of such copolymers in the acid form preferably ranges from about 2,000 to 100,000, more preferably from about 5,000 to 75,000, most preferably from about 7,000 to 65,000. The ratio of acrylate to maleate segments in such copolymers will generally range from about 30:1 to about 1:1, more preferably from about 10:1 to 2:1. Water-soluble salts of such acrylic acid/maleic acid copolymers can include, for example, the alkali metal, ammonium and substituted ammonium salts. Soluble acrylate/maleate copolymers of this type are known materials which are described in European Patent Application No. 66915, published December 15, 1982, as well as in EP 193,360, published September 3, 1986, which also describes such polymers comprising hydroxypropylacrylate. Still other useful dispersing agents include the maleic/acrylic/vinyl alcohol terpolymers. Such materials are also disclosed in EP 193,360, including, for example, the 45/45/10 terpolymer of acrylic/maleic/vinyl alcohol.

Another polymeric material which can be included is polyethylene glycol (PEG). PEG can exhibit dispersing agent performance as well as act as a clay soil removal-antiredeposition agent. Typical molecular weight ranges for these purposes range from about 500 to about 100,000, preferably from about 1,000 to about 50,000, more preferably from about 1,500 to about 10,000.

Polyaspartate and polyglutamate dispersing agents may also be used, especially in conjunction with zeolite builders. Dispersing agents such as polyaspartate preferably have a molecular weight (avg.) of about 10,000.

Other polymer types which may be more desirable for biodegradability, improved bleach stability, or cleaning purposes include various terpolymers and hydrophobically modified copolymers, including those marketed by Rohm & Haas, BASF Corp., Nippon Shokubai and others for all manner of water-treatment, textile treatment, or detergent applications.

Brightener - Any optical brighteners or other brightening or whitening agents known in the art can be incorporated at levels typically from about 0.01% to about 1.2%, by weight, into the detergent compositions herein when they are designed for fabric washing or treatment.

Specific examples of optical brighteners which are useful in the present compositions are those identified in U.S. Patent 4,790,856, issued to Wixon on December 13, 1988. These brighteners include the PHORWHITE series of brighteners from Verona. Other brighteners disclosed in this reference include: Tinopal UNPA, Tinopal CBS and Tinopal 5BM; available from Ciba-Geigy; Arctic White CC and Arctic White CWD, the 2-(4-styryl-phenyl)-2H-naphtho[1,2-d]triazoles; 4,4'-bis-(1,2,3-triazol-2-yl)-stilbenes; 4,4'-bis(styryl)bisphenyls; and the aminocoumarins. Specific examples of these brighteners include 4-methyl-7-diethyl- amino coumarin; 1,2-bis(benzimidazol-2-yl)ethylene; 1,3-diphenyl-pyrazolines; 2,5-bis(benzoxazol-2-yl)thiophene; 2-styryl-naphtho[1,2-d]oxazole; and 2-(stilben-4-yl)-2H-naphtho[1,2-d]triazole. See also U.S. Patent 3,646,015, issued February 29, 1972 to Hamilton.

Dye Transfer Inhibiting Agents - The compositions of the present invention may also include one or more materials effective for inhibiting the transfer of dyes from one fabric to another during the cleaning process. Generally, such dye transfer inhibiting agents include polyvinyl pyrrolidone polymers, polyamine N-oxide polymers, copolymers of N-vinylpyrrolidone and N-vinylimidazole, manganese phthalocyanine, peroxidases, and mixtures thereof. If used, these agents typically comprise from about 0.01% to about 10% by weight of the composition, preferably from about 0.01% to about 5%, and more preferably from about 0.05% to about 2%. See US Patent 5,633,255 to Fredj.

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

Chelating Agents - The detergent compositions herein may also optionally contain one or chelating agents, particularly chelating agents for adventitious transition metals. Those commonly found in wash water include iron and/or manganese in water-soluble, colloidal or particulate form, and may be associated as oxides or hydroxides, or found in association with soils such as humic substances. Preferred chelants are those which effectively control such transition metals, especially including controlling deposition of such transition-metals or their compounds on fabrics and/or controlling undesired redox reactions in the wash medium and/or at fabric or hard surface interfaces. Such chelating agents include those having low molecular weights as well as polymeric types, typically having at least one, preferably two or more donor heteroatoms such as O or N, capable of co-ordination to a transition-metal. Common chelating agents can be selected from the group consisting of aminocarboxylates, aminophosphonates, polyfunctionally-substituted aromatic chelating agents and mixtures thereof.

If utilized, chelating agents will generally comprise from about 0.001% to about 15% by weight of the detergent compositions herein. More preferably, if utilized, chelating agents will comprise from about 0.01% to about 3.0% by weight of such compositions.

Suds Suppressors - Compounds for reducing or suppressing the formation of suds can be incorporated into the compositions of the present invention when required by the intended use, especially washing of laundry in washing appliances. Other compositions, such as those designed for hand-washing, may desirably be high-sudsing and may omit such ingredients. Suds suppression can be of particular importance in the so-called "high concentration cleaning process" as described in U.S. 4,489,455 and 4,489,574 and in front-loading European-style washing machines.

A wide variety of materials may be used as suds suppressors and are well known in the art. See, for example, Kirk Othmer Encyclopedia of Chemical Technology, Third Edition, Volume 7, pages 430-447 (Wiley, 1979).

The compositions herein will generally comprise from 0% to about 10% of suds suppressor. When utilized as suds suppressors, monocarboxylic fatty acids, and salts thereof, will be present typically in amounts up to about 5%, preferably 0.5% - 3% by weight, of the detergent composition. although higher amounts may be used. Preferably

from about 0.01% to about 1% of silicone suds suppressor is used, more preferably from about 0.25% to about 0.5%. These weight percentage values include any silica that may be utilized in combination with polyorganosiloxane, as well as any suds suppressor adjunct materials that may be utilized. Monostearyl phosphate suds suppressors are generally utilized in amounts ranging from about 0.1% to about 2%, by weight, of the composition. Hydrocarbon suds suppressors are typically utilized in amounts ranging from about 0.01% to about 5.0%, although higher levels can be used. The alcohol suds suppressors are typically used at 0.2%-3% by weight of the finished compositions.

Alkoxyated Polycarboxylates - Alkoxyated polycarboxylates such as those prepared from polyacrylates are useful herein to provide additional grease removal performance. Such materials are described in WO 91/08281 and PCT 90/01815 at p. 4 et seq., incorporated herein by reference. Chemically, these materials comprise polyacrylates having one ethoxy side-chain per every 7-8 acrylate units. The side-chains are of the formula  $-(CH_2CH_2O)_m(CH_2)_nCH_3$  wherein m is 2-3 and n is 6-12. The side-chains are ester-linked to the polyacrylate "backbone" to provide a "comb" polymer type structure. The molecular weight can vary, but is typically in the range of about 2000 to about 50,000. Such alkoxyated polycarboxylates can comprise from about 0.05% to about 10%, by weight, of the compositions herein.

Fabric Softeners - Various through-the-wash fabric softeners, especially the impalpable smectite clays of U.S. Patent 4,062,647, Storm and Nirschl, issued December 13, 1977, as well as other softener clays known in the art, can optionally be used typically at levels of from about 0.5% to about 10% by weight in the present compositions to provide fabric softener benefits concurrently with fabric cleaning. Clay softeners can be used in combination with amine and cationic softeners as disclosed, for example, in U.S. Patent 4,375,416, Crisp et al, March 1, 1983 and U.S. Patent 4,291,071, Harris et al, issued September 22, 1981. Moreover, in laundry cleaning methods herein, known fabric softeners, including biodegradable types, can be used in pretreat, mainwash, post-wash and dryer-added modes.

Perfumes - Perfumes and perfumery ingredients useful in the present compositions and processes comprise a wide variety of natural and synthetic chemical ingredients, including, but not limited to, aldehydes, ketones, esters, and the like. Also included are

5 various natural extracts and essences which can comprise complex mixtures of  
10 ingredients, such as orange oil, lemon oil, rose extract, lavender, musk, patchouli,  
balsamic essence, sandalwood oil, pine oil, cedar, and the like.. Finished perfumes  
typically comprise from about 0.01% to about 2%, by weight, of the detergent  
5 compositions herein, and individual perfumery ingredients can comprise from about  
0.0001% to about 90% of a finished perfume composition.

15 Other Ingredients - A wide variety of other ingredients useful in detergent compositions  
can be included in the compositions herein, including other active ingredients, carriers,  
hydrotropes, processing aids, dyes or pigments, solvents for liquid formulations, solid  
20 10 fillers for bar compositions, etc. If high sudsing is desired, suds boosters such as the C<sub>10</sub>-  
C<sub>16</sub> alkanolamides can be incorporated into the compositions, typically at 1%-10%  
levels. The C<sub>10</sub>-C<sub>14</sub> monoethanol and diethanol amides illustrate a typical class of such  
suds boosters. Use of such suds boosters with high sudsing adjunct surfactants such as  
25 the amine oxides, betaines and sultaines noted above is also advantageous. If desired,  
15 water-soluble magnesium and/or calcium salts such as MgCl<sub>2</sub>, MgSO<sub>4</sub>, CaCl<sub>2</sub>, CaSO<sub>4</sub>  
and the like, can be added at levels of, typically, 0.1%-2%, to provide additional suds and  
to enhance grease removal performance, especially for liquid dishwashing purposes.

30 Various deterative ingredients employed in the present compositions optionally can  
be further stabilized by absorbing said ingredients onto a porous hydrophobic substrate,  
35 20 then coating said substrate with a hydrophobic coating. Preferably, the deterative  
ingredient is admixed with a surfactant before being absorbed into the porous substrate.  
In use, the deterative ingredient is released from the substrate into the aqueous washing  
liquor, where it performs its intended deterative function.

40 Liquid detergent compositions can contain water and other solvents as carriers.  
25 Low molecular weight primary or secondary alcohols exemplified by methanol, ethanol,  
propanol, and isopropanol are suitable. Monohydric alcohols are preferred for solubilizing  
surfactant, but polyols such as those containing from 2 to about 6 carbon atoms and from  
45 2 to about 6 hydroxy groups (e.g., 1,3-propanediol, ethylene glycol, glycerine, and 1,2-  
propanediol) can also be used. The compositions may contain from 5% to 90%, typically  
30 10% to 50% of such carriers.

5

10

15

The detergent compositions herein will preferably be formulated such that, during use in aqueous cleaning operations, the wash water will have a pH of between about 6.5 and about 11, preferably between about 7.0 and 10.5, more preferably between about 7.0 to about 9.5. Liquid dishwashing product formulations preferably have a pH between about 6.8 and about 9.0. Laundry products are typically at pH 9-11. Techniques for controlling pH at recommended usage levels include the use of buffers, alkalis, acids, etc., and are well known to those skilled in the art.

#### Form of the compositions

20

10

The compositions in accordance with the invention can take a variety of physical forms including granular, gel, tablet, bar and liquid forms. The compositions include the so-called concentrated granular detergent compositions adapted to be added to a washing machine by means of a dispensing device placed in the machine drum with the soiled fabric load.

25

15

The mean particle size of the components of granular compositions in accordance with the invention should preferably be such that no more than 5% of particles are greater than 1.7mm in diameter and not more than 5% of particles are less than 0.15mm in diameter.

30

35

20

The term mean particle size as defined herein is calculated by sieving a sample of the composition into a number of fractions (typically 5 fractions) on a series of Tyler sieves. The weight fractions thereby obtained are plotted against the aperture size of the sieves. The mean particle size is taken to be the aperture size through which 50% by weight of the sample would pass.

40

25

Certain preferred granular detergent compositions in accordance with the present invention are the high-density types, now common in the marketplace; these typically have a bulk density of at least 600 g/litre, more preferably from 650 g/litre to 1200 g/litre.

#### High Density Detergent Composition Processes

45

30

Various means and equipment are available to prepare high density (i.e., greater than about 550, preferably greater than about 650, grams/liter or "g/l"), high solubility, free-flowing, granular detergent compositions according to the present invention. Current commercial practice in the field employs spray-drying towers to manufacture granular laundry detergents which often have a density less than about 500 g/l. In this procedure,

50

55

an aqueous slurry of various heat-stable ingredients in the final detergent composition are formed into homogeneous granules by passage through a spray-drying tower, using conventional techniques, at temperatures of about 175°C to about 225°C. However, if spray drying is used as part of the overall process herein, additional or alternative process steps as described hereinafter must be used to obtain the level of density (i.e., > 650 g/l) required by modern compact, low dosage detergent products.

For example, spray-dried granules from a tower can be densified further by loading a liquid such as water or a nonionic surfactant into the pores of the granules and/or subjecting them to one or more high speed mixer/densifiers. A suitable high speed mixer/densifier for this process is a device marketed under the tradename "Lödige CB 30" or "Lödige CB 30 Recycler" which comprises a static cylindrical mixing drum having a central rotating shaft with mixing/cutting blades mounted thereon. In use, the ingredients for the detergent composition are introduced into the drum and the shaft/blade assembly is rotated at speeds in the range of 100-2500 rpm to provide thorough mixing/densification. See Jacobs et al, U.S. Patent 5,149,455, issued September 22, 1992, and U.S. Patent 5,565,422, issued October 15, 1996 to Del Greco et al. Other such apparatus includes the devices marketed under the tradename "Shugi Granulator" and under the tradename "Drais K-TTP 80).

Another process step which can be used to densify further spray-dried granules involves treating the spray-dried granules in a moderate speed mixer/densifier. Equipment such as that marketed under the tradename "Lödige KM" (Series 300 or 600) or "Lödige Ploughshare" mixer/densifiers are suitable for this process step. Such equipment is typically operated at 40-160 rpm. The residence time of the detergent ingredients in the moderate speed mixer/densifier is from about 0.1 to 12 minutes conveniently measured by dividing the steady state mixer/densifier weight by the throughput (e.g., Kg/hr). Other useful equipment includes the device which is available under the tradename "Drais K-T 160". This process step which employs a moderate speed mixer/densifier (e.g. Lödige KM) can be used by itself or sequentially with the aforementioned high speed mixer/densifier (e.g. Lödige CB) to achieve the desired density. Other types of granules manufacturing apparatus useful herein include the apparatus disclosed in U.S. Patent 2,306,898, to G. L. Heller, December 29, 1942.

5

10

15

20

25

30

35

40

45

50

55

While it may be more suitable to use the high speed mixer/densifier followed by the low speed mixer/densifier, the reverse sequential mixer/densifier configuration also can be used. One or a combination of various parameters including residence times in the mixer/densifiers, operating temperatures of the equipment, temperature and/or composition of the granules, the use of adjunct ingredients such as liquid binders and flow aids, can be used to optimize densification of the spray-dried granules in the process of the invention. By way of example, see the processes in Appel et al, U.S. Patent 5,133,924, issued July 28, 1992; Delwel et al, U.S. Patent 4,637,891, issued January 20, 1987; Kruse et al, U.S. Patent 4,726,908, issued February 23, 1988; and, Bortolotti et al, U.S. Patent 5,160,657, issued November 3, 1992.

In those situations in which particularly heat sensitive or highly volatile detergent ingredients are to be incorporated into the final detergent composition, processes which do not include spray drying towers are preferred. The formulator can eliminate the spray-drying step by feeding, in either a continuous or batch mode, starting detergent ingredients directly into mixing equipment that is commercially available. One particularly preferred embodiment involves charging a surfactant paste and an anhydrous material into a high speed mixer/densifier (e.g. Lödige CB) followed by a moderate speed mixer/densifier (e.g. Lödige KM) to form high density detergent agglomerates. See Capeci et al, U.S. Patent 5,366,652, issued November 22, 1994 and Capeci et al, U.S. Patent 5,486,303, issued January 23, 1996. Optionally, the liquid/solids ratio of the starting detergent ingredients in such a process can be selected to obtain high density agglomerates that are more free flowing and crisp. See Capeci et al, U.S. Patent 5,565,137, issued October 15, 1996.

Optionally, the process may include one or more recycle streams of undersized particles produced by the process which are fed back to the mixer/densifiers for further agglomeration or build-up. The oversized particles produced by this process can be sent to grinding apparatus and then fed back to the mixing/densifying equipment. These additional recycle process steps facilitate build-up agglomeration of the starting detergent ingredients resulting in a finished composition having a uniform distribution of the desired particle size (400-700 microns) and density (> 550 g/l). See Capeci et al, U.S. Patent 5,516,448, issued May 14, 1996 and Capeci et al, U.S. Patent 5,489,392, issued



February 6, 1996. Other suitable processes which do not call for the use of spray-drying towers are described by Bollier et al, U.S. Patent 4,828,721, issued May 9, 1989; Beerse et al, U.S. Patent 5,108,646, issued April 28, 1992; and, Jolicoeur, U.S. Patent 5,178,798, issued January 12, 1993.

In yet another embodiment, a high density detergent composition using a fluidized bed mixer. In this process, the various ingredients of the finished composition are combined in an aqueous slurry (typically 80% solids content) and sprayed into a fluidized bed to provide the finished detergent granules. Prior to the fluidized bed, this process can optionally include the step of mixing the slurry using the aforementioned Lödige CB mixer/densifier or a "Flexomix 160" mixer/densifier, available from Shugi. Fluidized bed or moving beds of the type available under the tradename "Escher Wyss" can be used in such processes.

Another suitable process which can be used herein involves feeding a liquid acid precursor of an anionic surfactant, an alkaline inorganic material (e.g. sodium carbonate) and optionally other detergent ingredients into a high speed mixer/densifier so as to form particles containing a partially or totally neutralized anionic surfactant salt and the other starting detergent ingredients. Optionally, the contents in the high speed mixer/densifier can be sent to a moderate speed mixer/densifier (e.g. Lödige KM) for further mixing resulting in the finished high density detergent composition. See Appel et al, U.S. Patent 5,164,108, issued November 17, 1992.

Optionally, high density detergent compositions according to the invention can be produced by blending conventional or densified spray-dried detergent granules with detergent agglomerates in various proportions (e.g. a 60:40 weight ratio of granules to agglomerates) produced by one or a combination of the processes discussed herein. See U.S. Patent 5,569,645, issued October 29, 1996 to Dinniwell et al. Additional adjunct ingredients such as enzymes, perfumes, brighteners and the like can be sprayed or admixed with the agglomerates, granules or mixtures thereof produced by the processes discussed herein.

Laundry washing method

Machine laundry methods herein typically comprise treating soiled laundry with an aqueous wash solution in a washing machine having dissolved or dispensed therein an effective amount of a machine laundry detergent composition in accord with the invention. By an effective amount of the detergent composition it is here meant from 40g to 300g of product dissolved or dispersed in a wash solution of volume from 5 to 65 litres, as are typical product dosages and wash solution volumes commonly employed in conventional machine laundry methods.

As noted, surfactants are used herein in detergent compositions, preferably in combination with other deterative surfactants, at levels which are effective for achieving at least a directional improvement in cleaning performance. In the context of a fabric laundry composition, such "usage levels" can vary widely, depending not only on the type and severity of the soils and stains, but also on the wash water temperature, the volume of wash water and the type of washing machine.

In a preferred use aspect a dispensing device is employed in the washing method. The dispensing device is charged with the detergent product, and is used to introduce the product directly into the drum of the washing machine before the commencement of the wash cycle. Its volume capacity should be such as to be able to contain sufficient detergent product as would normally be used in the washing method.

Once the washing machine has been loaded with laundry the dispensing device containing the detergent product is placed inside the drum. At the commencement of the wash cycle of the washing machine water is introduced into the drum and the drum periodically rotates. The design of the dispensing device should be such that it permits containment of the dry detergent product but then allows release of this product during the wash cycle in response to its agitation as the drum rotates and also as a result of its contact with the wash water.

Alternatively, the dispensing device may be a flexible container, such as a bag or pouch. The bag may be of fibrous construction coated with a water impermeable protective material so as to retain the contents, such as is disclosed in European published Patent Application No. 0018678. Alternatively it may be formed of a water-insoluble synthetic polymeric material provided with an edge seal or closure designed to rupture in aqueous media as disclosed in European published Patent Application Nos. 0011500,

0011501, 0011502, and 0011968. A convenient form of water frangible closure comprises a water soluble adhesive disposed along and sealing one edge of a pouch formed of a water impermeable polymeric film such as polyethylene or polypropylene.

#### 5 Detergent Composition Examples

In these Examples, the following abbreviation is used for a modified alkylbenzene sulfonate, sodium salt form or potassium salt form, prepared according to any of the preceding process examples: MLAS

The following abbreviations are used for cleaning product adjunct materials:

Cxy Amine Oxide	Alkyldimethylamine N-Oxide RN(O)Me <sub>2</sub> of given chainlength Cxy where average total carbon range of the non-methyl alkyl moiety R is from 10+x to 10+y
Amylase	Amylolytic enzyme of activity 60KNU/g sold by NOVO Industries A/S under the tradename Termamyl 60T. Alternatively, the amylase is selected from: Fungamyl®; Duramyl®; BAN®; and α amylase enzymes described in WO95/26397 and in co-pending application by Novo Nordisk PCT/DK96/00056.
APA	C8-C10 amido propyl dimethyl amine
Cxy Betaine	Alkyldimethyl Betaine having having an average total carbon range of alkyl moiety from 10+x to 10+y
Bicarbonate	Anhydrous sodium bicarbonate with a particle size distribution between 400µm and 1200µm
Borax	Na tetraborate decahydrate
BPP	Butoxy - propoxy - propanol
Brightener 1	Disodium 4,4'-bis(2-sulphostyryl)biphenyl
Brightener 2	Disodium 4,4'-bis(4-anilino-6-morpholino-1,3,5-triazin-2-yl)amino) stilbene-2,2'-disulfonate
CaCl <sub>2</sub>	Calcium chloride
Carbonate	Na <sub>2</sub> CO <sub>3</sub> anhydrous, 200µm - 900µm
Cellulase	Cellulolytic enzyme, 1000 CEVU/g, NOVO, Carezyme®
Citrate	Trisodium citrate dihydrate, 86.4%, 425µm - 850 µm
Citric Acid	Citric Acid, Anhydrous
CMC	Sodium carboxymethyl cellulose

5

CxyAS

Alkyl sulfate, Na salt or other salt if specified having an average total carbon range of alkyl moiety from 10+x to 10+y

10

CxyEz

Commercial linear or branched alcohol ethoxylate (not having mid-chain methyl branching) and having an average total carbon range of alkyl moiety from 10+x to 10+y average z moles of ethylene oxide

15

CxyEzS

Alkyl ethoxylate sulfate, Na salt (or other salt if specified) having an average total carbon range of alkyl moiety from 10+x to 10+y and an average of z moles of ethylene oxide

Diamine

Alkyl diamine, e.g., 1,3 propanediamine, Dytek EP, Dytek A, (Dupont) or selected from: dimethyl aminopropyl amine; 1,6-hexane diamine; 1,3 propane diamine; 2-methyl 1,5 pentane diamine; 1,3-pentanediamine; 1-methyl-diaminopropane; 1,3 cyclohexane diamine; 1,2 cyclohexane diamine

20

Dimethicone

40(gum)/60(fluid) wt. Blend of SE-76 dimethicone gum (G.E Silicones Div.) / dimethicone fluid of viscosity 350 cS.

25

DTPA

Diethylene triamine pentaacetic acid

DTPMP

Diethylene triamine penta (methylene phosphonate), Monsanto (Dequest 2060)

30

Endolase

Endoglucanase, activity 3000 CEVU/g, NOVO

EtOH

Ethanol

Fatty Acid (C12/18)

C12-C18 fatty acid

Fatty Acid (C12/14)

C12-C14 fatty acid

35

Fatty Acid (C14/18)

C14-C18 fatty acid

Fatty Acid (RPS)

Rapeseed fatty acid

Fatty Acid (TPK)

Topped palm kernel fatty acid

Formate

Formate (Sodium)

HEDP

1,1-hydroxyethane diphosphonic acid

40

Hydrotrope

selected from sodium, potassium, Magnesium, Calcium, ammonium or water-soluble substituted ammonium salts of toluene sulfonic acid, naphthalene sulfonic acid, cumene sulfonic acid, xylene sulfonic acid.

45

Isofol 12

X12 (average) Guerbet alcohols (Condea)

Isofol 16

C16 (average) Guerbet alcohols (Condea)

LAS

Linear Alkylbenzene Sulfonate (e.g., C11.8, Na or K salt)

50

55

5

10

15

20

25

30

35

40

45

50

55

Lipase	Lipolytic enzyme, 100kLU/g, NOVO, Lipolase®. Alternatively, the lipase is selected from: Amano-P; M1 Lipase®; Lipomax®; D96L - lipolytic enzyme variant of the native lipase derived from Humicola lanuginosa as described in US Serial No. 08/341,826; and the Humicola lanuginosa strain DSM 4106.
LMFAA	C12-14 alkyl N-methyl glucamide
MA/AA	Copolymer 1:4 maleic/acrylic acid, Na salt, avg. mw. 70,000.
MBAxEy	Mid-chain branched primary alkyl ethoxylate (average total carbons = x; average EO = y)
MBAxEyS	Mid-chain branched or modified primary alkyl ethoxylate sulfate, Na salt (average total carbons = x; average EO = y) according to the invention (see Example 9)
MBAyS	Mid-chain branched primary alkyl sulfate, Na salt (average total carbons = y)
MEA	Monoethanolamine
Cxy MES	Alkyl methyl ester sulfonate, Na salt having an average total carbon range of alkyl moiety from 10+x to 10+y
MgCl <sub>2</sub>	Magnesium chloride
MnCAT	Macrocyclic Manganese Bleach Catalyst as in EP 544,440 A or, preferably, use [Mn(Bcyclam)Cl <sub>2</sub> ] wherein Bcyclam = 5,12-dimethyl-1,5,8,12-tetraaza-bicyclo[6.6.2]hexadecane or a comparable bridged tetra-aza macrocycle
NaDCC	Sodium dichloroisocyanurate
NaOH	Sodium hydroxide
Cxy NaPS	Paraffin sulfonate, Na salt having an average total carbon range of alkyl moiety from 10+x to 10+y
NaSKS-6	Crystalline layered silicate of formula $\delta \cdot \text{Na}_2\text{Si}_2\text{O}_5$
NaTS	Sodium toluene sulfonate
NOBS	Nonanoyloxybenzene sulfonate, sodium salt
LOBS	C12 oxybenzenesulfonate, sodium salt
PAA	Polyacrylic Acid (mw = 4500)
PAE	Ethoxylated tetraethylene pentamine
PAEC	Methyl quaternized ethoxylated dihexylene triamine
PB1	Anhydrous sodium perborate bleach of nominal formula $\text{NaBO}_2 \cdot \text{H}_2\text{O}_2$
PEG	Polyethylene glycol (mw=4600)
Percarbonate	Sodium Percarbonate of nominal formula $2\text{Na}_2\text{CO}_3 \cdot 3\text{H}_2\text{O}_2$

5

10

15

20

25

30

35

40

45

50

55

PG	Propanediol
Photobleach	Sulfonated Zinc Phthalocyanine encapsulated in dextrin soluble polymer
PIE	Ethoxylated polyethyleneimine, water-soluble
Protease	Proteolytic enzyme, 4KNPU/g, NOVO, Savinase®. Alternatively, the protease is selected from: Maxatase®, Maxacal®, Maxapem 15®, subtilisin BPN and BPN'; Protease B; Protease A; Protease D; Primase®, Durazym®, Opticlean®, and Optimase®, and Alcalase®.
QAS	$R_2.N^+(CH_3)_x((C_2H_4O)_yH)z$ with $R_2 = C_8 - C_{18}$ $x+z = 3$ , $x = 0$ to $3$ , $z = 0$ to $3$ , $y = 1$ to $15$ .
Cxy SAS	Secondary alkyl sulfate, Na salt having an average total carbon range of alkyl moiety from $10+x$ to $10+y$
Silicate	Sodium Silicate, amorphous ( $SiO_2:Na_2O$ ; 2.0 ratio)
Silicone antifoam	Polydimethylsiloxane foam controller + siloxane-oxyalkylene copolymer as dispersing agent; ratio of foam controller:dispersing agent = 10:1 to 100:1; or, combination of fumed silica and high viscosity polydimethylsiloxane (optionally chemically modified)
Solvent	nonaqueous solvent e.g., hexylene glycol, see also propylene glycol
SRP 1	Sulfobenzoyl end capped esters with oxyethylene oxy and terephthaloyl backbone
SRP 2	Sulfonated ethoxylated terephthalate polymer
SRP 3	Methyl capped ethoxylated terephthalate polymer
STPP	Sodium tripolyphosphate, anhydrous
Sulfate	Sodium sulfate, anhydrous
TAED	Tetraacetylenediamine
TFA	C16-18 alkyl N-methyl glucamide
Zeolite A	Hydrated Sodium Aluminosilicate, $Na_{12}(Al_2SiO_2)_{12} \cdot 27H_2O$ ; 0.1 - 10 $\mu m$
Zeolite MAP	Zeolite (Maximum aluminum P) detergent grade (Crosfield)
Typical ingredients often referred to as "minors" can include perfumes, dyes, pH trims etc.	

The following example is illustrative of the present invention, but is not meant to limit or otherwise define its scope. All parts, percentages and ratios used are expressed as percent weight unless otherwise noted.

EXAMPLE 25

The following laundry detergent compositions A to F are prepared in accordance with the invention:

	A	B	C	D	E	F
MLAS	22	16.5	11	1 - 5.5	10 - 25	5-35
Any Combination of: C45AS C45E1S or C23E3S LAS C26 SAS C47 NaPS C48 MES MBA16.5S MBA15.5E2S	0	1 - 5.5	11	16.5	0 - 5	0-10
QAS	0 - 2	0 - 2	0 - 2	0 - 2	0 - 4	0
C23E6.5 or C45E7	1.5	1.5	1.5	1.5	0 - 4	0 - 4
Zeolite A	27.8	0	27.8	27.8	20 - 30	0
Zeolite MAP	0	27.8	0	0	0	0
STPP	0	0	0	0	0	5-65
PAA	2.3	2.3	2.3	2.3	0 - 5	0 - 5
Carbonate	27.3	27.3	27.3	27.3	20 - 30	0 - 30
Silicate	0.6	0.6	0.6	0.6	0 - 2	0 - 6
PBI	1.0	1.0	0-10	0-10	0 - 10	0 - 20
NOBS	0-1	0-1	0-1	0.1	0.5-3	0 - 5
LOBS	0	0	0-3	0	0	0
TAED	0	0	0	2	0	0 - 5
MnCAT	0	0	0	0	2ppm	0 - 1
Protease	0 - 0.5	0 - 0.5	0 - 0.5	0 - 0.5	0 - 0.5	0 - 1
Cellulase	0 - 0.3	0 - 0.3	0 - 0.3	0 - 0.3	0 - 0.5	0 - 1

Amylase	0 - 0.5	0 - 0.5	0 - 0.5	0 - 0.5	0 - 1	0 - 1
SRP 1 or SRP 2	0.4	0.4	0.4	0.4	0 - 1	0 - 5
Brightener 1 or 2	0.2	0.2	0.2	0.2	0 - 0.3	0 - 5
PEG	1.6	1.6	1.6	1.6	0 - 2	0 - 3
Silicone Antifoam	0.42	0.42	0.42	0.42	0 - 0.5	0 - 1
Sulfate, Water, Minors	to 100%	to 100%	to 100%	to 100%	to 100%	to 100%
Density (g/L)	400- 700	600- 700	600- 700	600- 700	600 - 700	450- 750

## EXAMPLE 26

The following laundry detergent compositions G to J suitable for hand-washing soiled fabrics are prepared in accord with the invention:

	G	H	I	J
MLAS	18	22	18	22
STPP	20	40	22	28
Carbonate	15	8	20	15
Silicates	15	10	15	10
Protease	0	0	0.3	0.3
Perborate	0	0	0	10
Sodium Chloride	25	15	20	10
Brightener	0 - 0.3	0.2	0.2	0.2
Moisture & Minors	---Balance---			

## EXAMPLE 27

## Cleaning Product Compositions

The following liquid laundry detergent compositions K to O are prepared in accord with the invention. Abbreviations are as used in the preceding Examples.



	K	L	M	N	O
MLAS	1 - 7	7 - 12	12 - 17	17 - 22	1 - 35
Any combination of: C25E1.8-2.5S MBA15.5E1.8S MBA15.5S C25AS (linear to high 2-alkyl) C47 NaPS C26 SAS LAS C26 MES	15 - 21	10 - 15	5 - 10	0 - 5	0 - 25
LMFAA	0 - 3.5	0 - 3.5	0 - 3.5	0 - 3.5	0 - 8
C23E9 or C23E6.5	0 - 2	0 - 2	0 - 2	0 - 2	0 - 8
APA	0 - 0.5	0 - 0.5	0 - 0.5	0 - 0.5	0 - 2
Citric Acid	5	5	5	5	0 - 8
Fatty Acid (TPK or C12/14)	2	2	2	2	0 - 14
EtOH	4	4	4	4	0 - 8
PG	6	6	6	6	0 - 10
MEA	1	1	1	1	0 - 3
NaOH	3	3	3	3	0 - 7
Hydrotrope or NaTS	2.3	2.3	2.3	2.3	0 - 4
Formate	0.1	0.1	0.1	0.1	0 - 1
Borax	2.5	2.5	2.5	2.5	0 - 5
Protease	0.9	0.9	0.9	0.9	0 - 1.3
Lipase	0.06	0.06	0.06	0.06	0 - 0.3
Amylase	0.15	0.15	0.15	0.15	0 - 0.4
Cellulase	0.05	0.05	0.05	0.05	0 - 0.2
PAE	0 - 0.6	0 - 0.6	0 - 0.6	0 - 0.6	0 - 2.5
PIE	1.2	1.2	1.2	1.2	0 - 2.5
PAEC	0 - 0.4	0 - 0.4	0 - 0.4	0 - 0.4	0 - 2

SRP 2	0.2	0.2	0.2	0.2	0 - 0.5
Brightener 1 or 2	0.15	0.15	0.15	0.15	0 - 0.5
Silicone antifoam	0.12	0.12	0.12	0.12	0 - 0.3
Fumed Silica	0.0015	0.0015	0.0015	0.0015	0-0.003
Perfume	0.3	0.3	0.3	0.3	0 - 0.6
Dye	0.0013	0.0013	0.0013	0.0013	0-0.003
Moisture/minors	Balance	Balance	Balance	Balance	Balance
Product pH (10% in DI water)	7.7	7.7	7.7	7.7	6 - 9.5

## EXAMPLE 28

Non-limiting examples P-Q of a bleach-containing nonaqueous liquid laundry detergent composition are prepared as follows:

<u>Component</u>	P	Q
	<u>Wt. %</u>	<u>Range (% wt.)</u>
<u>Liquid Phase</u>		
MLAS	15	1-35
LAS	12	0-35
C24E5	14	10-20
Solvent or Hexylene glycol	27	20-30
Perfume	0.4	0-1
<u>Solid Phase</u>		
Protease	0.4	0-1
Citrate	4	3-6
PBI	3.5	2-7
NOBS	8	2-12
Carbonate	14	5-20
DTPA	1	0-1.5
Brightener 1	0.4	0-0.6
Silicon antifoam	0.1	0-0.3
Minors	Balance	Balance

The resulting anhydrous heavy duty liquid laundry detergent provides excellent stain and soil removal performance when used in normal fabric laundering operations.

## EXAMPLE 29

The following examples R-V further illustrate the invention herein with respect to shampoo formulations.

<u>Component</u>	R	S	T	U	V
Ammonium C24E2S	5	3	2	10	8
Ammonium C24AS	5	5	4	5	8
MLAS	0.6	1	4	5	7
Cocamide MEA	0	0.68	0.68	0.8	0
PEG 14,000 mol. wt.	0.1	0.35	0.5	0.1	0
Cocoamidopropylbetaine	2.5	2.5	0	0	1.5
Cetyl alcohol	0.42	0.42	0.42	0.5	0.5
Stearyl alcohol	0.18	0.18	0.18	0.2	0.18
Ethylene glycol distearate	1.5	1.5	1.5	1.5	1.5
Dimethicone	1.75	1.75	1.75	1.75	2.0
Perfume	0.45	0.45	0.45	0.45	0.45
Water and minors	balance	balance	balance	balance	balance

## Claims

5

10

15

20

25

30

35

40

45


50

55

## WHAT IS CLAIMED IS:

1. A modified alkylbenzene sulfonate surfactant mixture comprising:

(a) from 60% to 95% by weight of a mixture of branched alkylbenzene sulfonates having formula (I):




(I)

wherein L is an acyclic aliphatic moiety consisting of carbon and hydrogen, said L having two methyl termini and said L having no substituents other than A, R<sup>1</sup> and R<sup>2</sup>; and wherein said mixture of branched alkylbenzene sulfonates contains two or more of said branched alkylbenzene sulfonates differing in molecular weight of the anion of said formula (I) and wherein said mixture of branched alkylbenzene sulfonates has

- a sum of carbon atoms in R<sup>1</sup>, L and R<sup>2</sup> of from 9 to 15;
- an average aliphatic carbon content of from 10.0 to 14.0 carbon atoms; M is a cation or cation mixture having a valence q; a and b are integers selected such that said branched alkylbenzene sulfonates are electroneutral; R<sup>1</sup> is C<sub>1</sub>-C<sub>3</sub> alkyl; R<sup>2</sup> is selected from H and C<sub>1</sub>-C<sub>3</sub> alkyl; A is a benzene moiety; and

(b) from 5% to 40% by weight of a mixture of nonbranched alkylbenzene sulfonates having formula (II):



(II)

wherein a, b, M, A and q are as defined hereinbefore and Y is an unsubstituted linear aliphatic moiety consisting of carbon and hydrogen having two methyl termini, and wherein said Y has a sum of carbon atoms of from 9 to 15, preferably

5

from 10 to 14, and said Y has an average aliphatic carbon content of from 10.0 to 14.0; and

10

wherein said modified alkylbenzene sulfonate surfactant mixture is further characterized by a 2/3-phenyl index of from 275 to 10,000.

15

2. A modified alkylbenzene sulfonate surfactant mixture according to Claim 1 wherein M is selected from H, Na, K and mixtures thereof;  $a=1$ ;  $b=1$ ;  $q=1$ ; and said modified alkylbenzene sulfonate surfactant mixture has a 2-methyl-2-phenyl index of less than 0.3.

20

3. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 1 to 2 wherein said 2-methyl-2-phenyl index is from 0 to 0.1.

25

4. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 1 to 3 which is the product of a process using as catalyst a zeolite selected from mordenite, offretite and H-ZSM-12 in at least partially acidic form.

30

5. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 1 to 4 wherein said catalyst is an acidic mordenite.

35

6. A detergent composition comprising:

(a) from 0.1% to 95%, by weight of modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 1 to 5;

40

(b) from 0.00001% to 99.9%, by weight of conventional cleaning adjuncts other than surfactants; and

(c) from 0% to 50%, by weight, of a surfactant other than said modified alkylbenzene sulfonate surfactant mixture;

45

provided that when said detergent composition comprises any other alkylbenzene sulfonate than the alkylbenzene sulfonate of said modified alkylbenzene sulfonate surfactant mixture, said modified alkylbenzene sulfonate surfactant mixture and said other alkylbenzene sulfonate, as a mixture, have an overall 2/3-phenyl index of from 275 to 10,000.

50

55

5

7. A detergent composition consisting essentially of:

10

(a) from 1% to 50%, by weight of modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 1 to 5;

(b) from 0.00001% to 99.9%, by weight of conventional cleaning adjuncts other than surfactants; and

15

(c) from 0.1% to 50% by weight of surfactants other than alkylbenzene sulfonates; and

(d) from 0.1% to 95% water.

20

8. A detergent composition consisting essentially of:

(a) from 0.1% to 95%, by weight of modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 1 to 5; and

25

(b) from 0.00001% to 99.9%, by weight of conventional cleaning adjuncts other than surfactants.

9. A medium 2/3-phenyl surfactant mixture consisting essentially of:

30

a) from 1% to 60% by weight of a first alkylbenzene sulfonate surfactant, wherein said first alkylbenzene sulfonate surfactant is a modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 1 to 5; and

35

b) from 40% to 99%, by weight of a second alkylbenzene sulfonate surfactant, wherein said second alkylbenzene sulfonate surfactant is an alkylbenzene sulfonate surfactant mixture other than said modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 1 to 5, and wherein said second alkylbenzene sulfonate surfactant has a 2/3-phenyl index of from 75 to 160;

40

provided that said medium 2/3-phenyl surfactant mixture has a 2/3-phenyl index of from 160 to 275.

45

10. A detergent composition comprising:

50

(a) from 0.1% to 95% by weight of medium 2/3-phenyl surfactant mixture according to Claim 9;

55

(b) from 0.00001% to 99.9% by weight of conventional cleaning adjuncts other than surfactants; and

(c) from 0% to 50% by weight of a surfactant other than said medium 2/3-phenyl surfactant mixture;

provided that when said detergent composition comprises any other alkylbenzene sulfonate than the alkylbenzene sulfonate of said medium 2/3-phenyl surfactant mixture, said medium 2/3-phenyl surfactant mixture and said other alkylbenzene sulfonate, as a mixture, have an overall 2/3-phenyl index of from 160 to 275.

11. A detergent composition consisting essentially of:

(a) from 1% to 50%, by weight of medium 2/3-phenyl surfactant mixture according to Claim 9;

(b) from 0.1% to 98.8%, by weight of conventional cleaning adjuncts other than surfactants;

(c) from 0.1% to 50%, by weight of surfactants other than alkylbenzene sulfonates; and

(d) from 0.1% to 98.8%, by weight water.

12. A detergent composition consisting essentially of:

(a) from 0.1% to 95%, by weight of medium 2/3-phenyl surfactant mixture according to Claim 9; and

(b) from 0.00001% to 99.9%, by weight of conventional cleaning adjuncts other than surfactants.

13. A process for preparing a medium 2/3-phenyl surfactant mixture according to Claim 9 comprising a step selected from:

(i) blending said first alkylbenzene sulfonate surfactant and said second alkylbenzene sulfonate surfactant; and

(ii) blending the nonsulfonated precursor of said first alkylbenzene sulfonate surfactant and the nonsulfonated precursor of said second alkylbenzene sulfonate surfactant and sulfonating said blend.



5

10

15

20

25

30

35

40

45

50

55

14. A detergent composition comprising:

(a) from 1% to 50%, by weight of the product of Claim 13; and

(b) from 0.00001% to 99.9%, by weight of conventional cleaning adjuncts other than surfactants.

15. A surfactant mixture according to any one of Claims 1 to 5 wherein said modified alkylbenzene sulfonate surfactant mixture is prepared by a process comprising a step selected from:

(i) blending a mixture of branched and linear alkylbenzene sulfonate surfactants having a 2/3-phenyl index of 500 to 700 with an alkylbenzene sulfonate surfactant mixture having a 2/3-phenyl index of 75 to 160 and

(ii) blending a mixture of branched and linear alkylbenzenes having a 2/3-phenyl index of 500 to 700 with an alkylbenzene mixture having a 2/3-phenyl index of 75 to 160 and sulfonating said blend.

16. A detergent composition according to any one of Claims 6-8, 10-12 and 14 wherein said conventional cleaning adjunct other than surfactants is selected from the group consisting of builders, detergent enzymes, bleaching systems, brighteners, at least partially water-soluble or water dispersible polymers, abrasives, bactericides, tarnish inhibitors, dyes, solvents, hydrotropes, perfumes, thickeners, antioxidants, processing aids, suds boosters, suds suppressors, buffers, anti-fungal agents, mildew control agents, insect repellents, anti-corrosive aids, chelants and mixtures thereof.

17. A detergent composition according to any one of Claims 6-8, 10-12, 14 and 16 wherein said cleaning composition is in the form of a liquid, powder, agglomerate, paste, tablet, bar, gel, or granule.

18. A method comprising treating a fabric with the detergent composition to any one of Claims 6-8, 10-12, 14, 16 and 17.

5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

19. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 1 to 5 consisting essentially of said mixture of branched alkylbenzene sulfonates and nonbranched alkylbenzene sulfonates, wherein said 2-methyl-2-phenyl index of said modified alkylbenzene sulfonate surfactant mixture is less than 0.1, and wherein in said mixture of branched and nonbranched alkylbenzene sulfonates, said average aliphatic carbon content is from 11.5 to 12.5 carbon atoms;  $R^1$  is methyl;  $R^2$  is selected from H and methyl provided that in at least 0.7 mole fraction of said branched alkylbenzene sulfonates  $R^2$  is H; and wherein said sum of carbon atoms in  $R^1$ , L and  $R^2$  is from 10 to 14; and further wherein in said mixture of nonbranched alkylbenzene sulfonates, said Y has a sum of carbon atoms of from 10 to 14 carbon atoms, said average aliphatic carbon content of said nonbranched alkylbenzene sulfonates is from 11.5 to 12.5 carbon atoms, and M is a monovalent cation or cation mixture selected from H, Na and mixtures thereof.

20. A modified alkylbenzene sulfonate surfactant mixture comprising the product of a process comprising the steps of:

(I) alkylating benzene with an alkylating mixture;

(II) sulfonating the product of (I); and

(III) neutralizing the product of (II);

wherein said alkylating mixture comprises:

(a) from 1% to 99.9%, by weight of branched  $C_9$ - $C_{20}$  monoolefins, said branched monoolefins having structures identical with those of the branched monoolefins formed by dehydrogenating branched paraffins of formula  $R^1LR^2$  wherein L is an acyclic aliphatic moiety consisting of carbon and hydrogen and containing two terminal methyls;  $R^1$  is  $C_1$  to  $C_3$  alkyl; and  $R^2$  is selected from H and  $C_1$  to  $C_3$  alkyl; and

(b) from 0.1% to 85%, by weight of  $C_9$ - $C_{20}$  linear aliphatic olefins;

wherein said alkylating mixture contains said branched  $C_9$ - $C_{20}$  monoolefins having at least two different carbon numbers in said  $C_9$ - $C_{20}$  range, and has a mean carbon content of from 9.0 to 15.0 carbon atoms; and wherein said components (a) and (b) are at a weight ratio of at least 15:85.

21. A modified alkylbenzene sulfonate surfactant mixture consisting essentially of the product of a process comprising the steps, in sequence, of:

- (I) alkylating benzene with an alkylating mixture;
- (II) sulfonating the product of (I); and
- (III) neutralizing the product of (II);

wherein said alkylating mixture comprises:

(a) from 1% to 99.9%, by weight of a branched alkylating agent selected from:

(i) C<sub>9</sub>-C<sub>20</sub> internal monoolefins R<sup>1</sup>LR<sup>2</sup> wherein L is an acyclic olefinic moiety consisting of carbon and hydrogen and containing two terminal methyls;

(ii) C<sub>9</sub>-C<sub>20</sub> alpha monoolefins R<sup>1</sup>AR<sup>2</sup> wherein A is an acyclic alpha-olefinic moiety consisting of carbon and hydrogen and containing one terminal methyl and one terminal olefinic methylene;

(iii) C<sub>9</sub>-C<sub>20</sub> vinylidene monoolefins R<sup>1</sup>BR<sup>2</sup> wherein B is an acyclic vinylidene olefin moiety consisting of carbon and hydrogen and containing two terminal methyls and one internal olefinic methylene;

(iv) C<sub>9</sub>-C<sub>20</sub> primary alcohols R<sup>1</sup>QR<sup>2</sup> wherein Q is an acyclic aliphatic primary terminal alcohol moiety consisting of carbon, hydrogen and oxygen and containing one terminal methyl;

(v) C<sub>9</sub>-C<sub>20</sub> primary alcohols R<sup>1</sup>ZR<sup>2</sup> wherein Z is an acyclic aliphatic primary nonterminal alcohol moiety consisting of carbon, hydrogen and oxygen and containing two terminal methyls; and

(vi) mixtures thereof;

wherein in any of (i)-(vi), R<sup>1</sup> is C<sub>1</sub> to C<sub>3</sub> alkyl and R<sup>2</sup> is selected from H and C<sub>1</sub> to C<sub>3</sub> alkyl; and

(b) from 0.1% to 85%, by weight of C<sub>9</sub>-C<sub>20</sub> linear alkylating agent selected from C<sub>9</sub>-C<sub>20</sub> linear aliphatic olefins, C<sub>9</sub>-C<sub>20</sub> linear aliphatic alcohols and mixtures thereof;

wherein said alkylating mixture contains said branched alkylating agents having at least two different carbon numbers in said C<sub>9</sub>-C<sub>20</sub> range, and has a mean carbon content of

from 9.0 to 15.0 carbon atoms; and wherein said components (a) and (b) are at a weight ratio of at least 15:85.

22. A modified alkylbenzene sulfonate surfactant mixture according to Claim 20 wherein said alkylating mixture consists essentially of:

(a) from 0.5% to 47.5%, by weight of said branched alkylating agent selected from:

(i) C<sub>9</sub>-C<sub>14</sub> internal monoolefins R<sup>1</sup>LR<sup>2</sup> wherein L is an acyclic olefinic moiety consisting of carbon and hydrogen and containing two terminal methyls;

(ii) C<sub>9</sub>-C<sub>14</sub> alpha monoolefins R<sup>1</sup>AR<sup>2</sup> wherein A is an acyclic alpha-olefinic moiety consisting of carbon and hydrogen and containing one terminal methyl and one terminal olefinic methylene; and

(iii) mixtures thereof;

wherein in any of (i)-(iii), R<sup>1</sup> is methyl, and R<sup>2</sup> is H or methyl provided that in at least 0.7 mole fraction of the total of said monoolefins, R<sup>2</sup> is H; and

(b) from 0.1% to 25%, by weight of C<sub>9</sub>-C<sub>14</sub> linear aliphatic olefins; and

(c) from 50% to 98.9%, by weight of carrier materials selected from paraffins and inert nonparaffinic solvents;

wherein said alkylating mixture contains said branched alkylating agents having at least two different carbon numbers in said C<sub>9</sub>-C<sub>14</sub> range, and has a mean carbon content of from 11.5 to 12.5 carbon atoms; and wherein said components (a) and (b) are at a weight ratio of from 51:49 to 90:10.

23. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 20 to 22 wherein in step (I), said alkylation is performed in the presence of an alkylation catalyst, said alkylation catalyst is an intermediate acidity solid porous alkylation catalyst, and step (II) comprises removal of components other than monoalkylbenzene prior to contacting the product of step (I) with sulfonating agent.

5

10

15

20

25

30

35

40

45

50

55

24. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 20 to 23 wherein said alkylation catalyst is other than a member selected from the group consisting of HF,  $AlCl_3$ , sulfuric acid and mixtures thereof.

25. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 20 to 24 wherein a hydrotrope, hydrotrope precursor, or mixtures thereof is added after step (I).

26. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 20 to 25 wherein a hydrotrope, hydrotrope precursor or mixtures thereof is added during or after step (II) and prior to step (III).

27. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 20 to 26 wherein a hydrotrope is added during or after step (III).

28. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 20 to 27 wherein said alkylation catalyst is selected from the group consisting of non-fluorinated acidic mordenite-type catalyst, fluorinated acidic mordenite-type catalyst and mixtures thereof.

29. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 20 to 28 wherein in step (I) said alkylation is performed at a temperature of from 125°C to 230°C and at a pressure of from 50 psig to 1000 psig.

30. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 20 to 29 wherein in step (I) said alkylation is performed at a temperature of from 175°C to 215°C, at a pressure of from 100 psig to 250 psig. and a time of from 0.01 hour to 18 hours.

31. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 20 to 30 wherein said step (III) is performed using a basic salt, said basic salt having a

5 cation selected from the group consisting of alkali metal, alkaline earth metal,  
ammonium, substituted ammonium, and mixtures thereof and an anion selected from  
10 hydroxide, oxide, carbonate, silicate, phosphate, and mixtures thereof.

15 32. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims  
20 to 31 wherein said basic salt is selected from the group consisting of sodium  
hydroxide, sodium silicate, potassium hydroxide, potassium silicate, magnesium  
hydroxide, ammonium hydroxide, and mixtures thereof.

20 33. A modified alkylbenzene sulfonate surfactant mixture according to any one of Claims  
20 to 32 wherein step (II) is performed using a sulfonating agent selected from the group  
consisting of sulfur trioxide, sulfur trioxide/air mixtures, and sulfuric acid.

25 34. A detergent composition comprising:

(a) from 0.1% to 95%, by weight of modified alkylbenzene sulfonate surfactant mixture  
according to any one of Claims 20 to 33; and

30 (b) from 0.00001% to 99.9%, by weight of a conventional cleaning adjunct.


35 35. A detergent composition according to Claim 34 wherein said conventional cleaning  
agent adjunct is selected from the group consisting of builders, detergent enzymes,  
bleaching systems, surfactants other than the product of step (III), brighteners, at least  
partially water-soluble or water dispersible polymers, polysaccharides, abrasives,  
40 bactericides, tarnish inhibitors, dyes, solvents, hydrotropes, perfumes, thickeners,  
antioxidants, processing aids, suds boosters, suds suppressors, buffers, anti-fungal or  
mildew control agents, insect repellents, anti-corrosive aids, chelants and mixtures  
thereof.

45 36. A detergent composition according to any one of Claims 34 to 35 wherein said  
detergent composition is in the form of a liquid, powder, agglomerates, paste, tablet, bar,  
50 gel, or granule.

37. A method comprising treating a fabric with a detergent composition according to any one of Claims 34 to 36.

38. A modified alkylbenzene mixture comprising:

(a) from 60% to 95% by weight of a mixture of branched alkylbenzenes having formula (I):



(I)

wherein L is an acyclic aliphatic moiety consisting of carbon and hydrogen and having two methyl termini, and wherein said mixture of branched alkylbenzenes contains two or more compounds of said formula (I) differing in molecular weight and wherein said mixture of branched alkylbenzenes is characterized by

- a sum of carbon atoms in R<sup>1</sup>, R<sup>2</sup> and L of from 9 to 15, preferably from 10 to 14; and

- an average aliphatic carbon content, based on the sum of R<sup>1</sup>, L and R<sup>2</sup>, of from 10.0 to 14.0 carbon atoms;

and further, wherein L has no substituents other than A, R<sup>1</sup> and R<sup>2</sup>; R<sup>1</sup> is C<sub>1</sub>-C<sub>3</sub> alkyl; R<sup>2</sup> is selected from H and C<sub>1</sub>-C<sub>3</sub> alkyl; A is a benzene moiety; and

(b) from 5% to 40% by weight of a mixture of nonbranched alkylbenzenes having formula (II):



(II)


wherein A is a benzene moiety and Y is an unsubstituted linear aliphatic moiety consisting of carbon and hydrogen having two methyl termini, and wherein Y has from 9 to 15 carbon atoms in total and said mixture of nonbranched alkylbenzenes has an average aliphatic carbon content of from 10.0 to 14.0 carbon atoms; and

wherein said modified alkylbenzene mixture is further characterized by a 2/3-phenyl index of from 275 to 10,000, and a 2-methyl-2-phenyl index of less than 0.3.

39. A modified alkylbenzene mixture comprising:

i) from 20% to 99% by weight of a first alkylbenzene mixture, wherein said first alkylbenzene mixture consists essentially of:

a) from 60% to 95% by weight of a mixture of branched alkylbenzenes having formula (I):



(I)

wherein L is an acyclic aliphatic moiety consisting of carbon and hydrogen and having two methyl termini, and wherein said mixture of branched alkylbenzenes contains two or more compounds of said formula (I) differing in molecular weight and wherein said mixture of branched alkylbenzenes is characterized by

- a sum of carbon atoms in  $R^1$ ,  $R^2$  and L of from 9 to 15; and
- an average aliphatic carbon content, based on the sum of  $R^1$ , L and  $R^2$ , of from 10.0 to 14.0 carbon atoms;

and further, wherein L has no substituents other than A,  $R^1$  and  $R^2$ ;  $R^1$  is  $C_1$ - $C_3$  alkyl;  $R^2$  is selected from H and  $C_1$ - $C_3$  alkyl; A is a benzene moiety; and

b) from 5% to 40% by weight of a mixture of nonbranched alkylbenzenes having formula (II):



(II)

wherein A is a benzene moiety and Y is an unsubstituted linear aliphatic moiety consisting of carbon and hydrogen having two methyl termini, and wherein Y has from 9 to 15 carbon atoms in total and said mixture of nonbranched alkylbenzenes has an average aliphatic carbon content of from 10.0 to 14.0 carbon atoms;



wherein said first alkylbenzene mixture has a 2/3-phenyl index  $f$  from 275 to 10,000; and

ii) the balance, no more than 80% by weight, of a second alkylbenzene mixture, wherein said second alkylbenzene mixture has a 2/3-phenyl index of from 75 to 160; and

wherein said modified alkylbenzene mixture has an overall 2/3-phenyl index of from 165 to 10,000.

40. A detergent composition comprising:

(a) from 1% to 50%, by weight of modified alkylbenzene sulfonate surfactant mixture according to any one of Claims 1 to 5, wherein said modified alkylbenzene sulfonate surfactant mixture has a 2-methyl-2-phenyl index of less than 0.3;

(b) from 0.000001% to 10%, by weight of a member selected from the group consisting of optical brighteners, dyes, photobleaches, hydrophobic bleach activators and transition metal bleach catalysts;

(c) from 0.1% to 40% by weight of surfactants selected from the group consisting of cationic surfactants, nonionic surfactants, anionic surfactants, and amine oxide surfactants; and

(d) from 10% to 99%, by weight of conventional cleaning adjuncts;

provided that when said detergent composition comprises any alkylbenzene sulfonate surfactant other than said modified alkylbenzene sulfonate surfactant mixture, said detergent composition is further characterized by an overall 2/3-phenyl index of at least 200, wherein said overall 2/3-phenyl index is determined by measuring 2/3-phenyl index, as defined herein, on a blend of said modified alkylbenzene sulfonate surfactant mixture and said any other alkylbenzene sulfonate to be added to said detergent composition, said blend, for purposes of measurement, being prepared from aliquots of said modified alkylbenzene sulfonate surfactant mixture and said other alkylbenzene sulfonate not yet exposed to any other of said components of the detergent composition; and

further provided that when said detergent composition comprises any alkylbenzene sulfonate surfactant other than said modified alkylbenzene sulfonate surfactant mixture,

5  
10  
15  
said detergent composition is further characterized by an overall 2-methyl-2-phenyl index of less than 0.3, wherein said overall 2-methyl-2-phenyl index is to be determined by measuring 2-methyl-2-phenyl index, as defined herein, on a blend of said modified alkylbenzene sulfonate surfactant mixture and any other alkylbenzene sulfonate to be added to said detergent composition, said blend, for purposes of measurement, being prepared from aliquots of said modified alkylbenzene sulfonate surfactant mixture and said other alkylbenzene sulfonate not yet exposed to any other of said components of the detergent composition.

20  
41. A detergent composition according to Claim 40 wherein said cationic surfactant is selected from linear and branched, substituted and unsubstituted, C<sub>8</sub>-C<sub>16</sub> alkyl ammonium salts.

25  
42. A detergent composition according to Claim 40 which is substantially free from alkylbenzene sulfonate surfactants other than said modified alkylbenzene sulfonate surfactant mixture.

30  
43. A detergent composition according to Claim 40 which comprises, in said component (c), at least 0.1% by weight, of a commercial C<sub>10</sub>-C<sub>14</sub> linear alkylbenzene sulfonate surfactant.

35  
40  
44. A detergent composition according to Claim 40 which comprises, in said component (c), at least 0.1%, by weight of a commercial highly branched alkylbenzene sulfonate surfactant.

45  
45. A detergent composition according to Claim 40 which comprises, in said component (c), a nonionic surfactant at a level of from 0.5% to 25% by weight of said detergent composition, and wherein said nonionic surfactant is a polyalkoxylated alcohol in capped or non-capped form having:

50  
- a hydrophobic group selected from linear C<sub>10</sub>-C<sub>16</sub> alkyl, mid-chain C<sub>1</sub>-C<sub>3</sub> branched C<sub>10</sub>-C<sub>16</sub> alkyl, guerbet branched C<sub>10</sub>-C<sub>16</sub> alkyl, and mixtures thereof and

5 - a hydrophilic group selected from 1-15 ethoxylates, 1-15 propoxylates 1-15 butoxylates and mixtures thereof, in capped or uncapped form.

10 46. A detergent composition according to Claim 40 which comprises, in said component (c), an alkyl sulfate surfactant at a level of from 0.5% to 25% by weight of said detergent composition, wherein said alkyl sulfate surfactant has a hydrophobic group selected from  
15 linear C<sub>10</sub>-C<sub>18</sub> alkyl, mid-chain C<sub>1</sub>-C<sub>3</sub> branched C<sub>10</sub>-C<sub>18</sub> alkyl, guerbet branched C<sub>10</sub>-C<sub>18</sub> alkyl, and mixtures thereof and  
a cation selected from Na, K and mixtures thereof.

20 47. A detergent composition according to Claim 40 which comprises, in said component (c), an alkyl(polyalkoxy)sulfate surfactant at a level of from 0.5% to 25% by weight of said detergent composition, wherein said alkyl(polyalkoxy)sulfate surfactant has  
25 - a hydrophobic group selected from linear C<sub>10</sub>-C<sub>16</sub> alkyl, mid-chain C<sub>1</sub>-C<sub>3</sub> branched C<sub>10</sub>-C<sub>16</sub> alkyl, guerbet branched C<sub>10</sub>-C<sub>16</sub> alkyl, and mixtures thereof and  
- a (polyalkoxy)sulfate hydrophilic group selected from 1-15 polyethoxysulfate, 1-15 polypropoxysulfate, 1-15 polybutoxysulfate, 1-15 mixed  
30 poly(ethoxy/propoxy/butoxy)sulfates, and mixtures thereof, in capped or uncapped form; and  
- a cation selected from Na, K and mixtures thereof.  
35

40 48. A detergent composition according to any one of Claims 40 to 47 having the form of a heavy-duty liquid detergent.

45 49. A detergent composition according to any one of Claims 40 to 47 having the form of a syndet laundry bar.

50 50. A detergent composition according to any one of Claims 40 to 47 having the form of a heavy-duty granule.  
55

5

10

51. A detergent composition according to any one of Claims 40 to 47 and 50 having the form of a heavy-duty granule and wherein said conventional cleaning adjunct (d) comprises from 10% to 50% by weight of said detergent composition of a nonphosphate builder.

15

52. A detergent composition according to any one of Claims 40 to 47 and 50 having the form of a heavy-duty granule and wherein said conventional cleaning adjunct (d) comprises from 10% to 50% by weight of said detergent composition of a phosphate builder.

20

25

53. A detergent composition according to any one of Claims 40 to 47 and 50 having the form of a heavy-duty granule and wherein said conventional cleaning adjunct (d) comprises as said phosphate builder a member selected from the group consisting of sodium tripolyphosphate.

30

35

40

45

50

55

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 99/24032

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 7 C11D1/22 C11D1/65 C11D1/83 C11D11/04 C11D17/00 //C11D1/75,C11D1/62,C11D1/72,C11D1/722		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 7 C11D A61K C07C		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the International search (name of data base and, where practical, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	WO 99 05244 A (PROCTER & GAMBLE) 4 February 1999 (1999-02-04)  page 12, paragraph 3 -page 14, paragraph 1; claim 1; examples 1-4,6,12	1-12, 16-24, 28-43, 45,48, 50-53
A	EP 0 615 968 A (UOP INC) 21 September 1994 (1994-09-21)  page 2, line 23 - line 29 page 6, line 36 -page 7, line 39; claim 6 --- -/--	1,2, 6-12, 18-24, 29-34, 37-40
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "Z" document member of the same patent family		
Date of the actual completion of the international search  31 January 2000		Date of mailing of the international search report  09/02/2000
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 600 nl, Fax: (+31-70) 340-3016		Authorized officer  Saunders, T

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 99/24032

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 196 624 A (WOO GAR L ET AL) 23 March 1993 (1993-03-23) cited in the application column 10, line 64 -column 12, line 7; example 1	1,6-12, 16-24, 29-40
A	WO 97 47573 A (HUNTSMAN SPEC CHEM CORP) 18 December 1997 (1997-12-18) cited in the application page 1, line 15 - line 17; example 1	1,4,5, 21,23, 24,29,30

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/24032

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9905244 A	04-02-1999	AU 8124998 A	16-02-1999
EP 0615968 A	21-09-1994	AU 658272 B	06-04-1995
		CA 2091855 A	18-09-1994
		JP 2055238 C	23-05-1996
		JP 6271485 A	27-09-1994
		JP 7084396 B	13-09-1995
		US 5196574 A	23-03-1993
		US 5344997 A	06-09-1994
		ZA 9301946 A	06-10-1993
		AT 165804 T	15-05-1995
		AU 3529893 A	29-09-1994
		DE 69318393 D	10-06-1998
		DE 69318393 T	03-09-1998
		ES 2115015 T	16-06-1993
		DK 653179 T	09-02-1998
US 5196624 A	23-03-1993	NONE	
WO 9747573 A	18-12-1997	US 5777187 A	07-07-1998
		CA 2257249 A	18-12-1997
		EP 0918736 A	02-06-1999

